

Certified, Filed and or Recorded on  
Nov. 07, 2008 AT 02:27PM

Signed: *MJ*  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 30, Township 37N, Range 25W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/15/08 found a TIES FROM 1944

left monument as found       lowered monument       removed monument (explain)

On 10/15/08 placed an PK NAIL WITH BENTON COUNTY SURVEYOR DISK

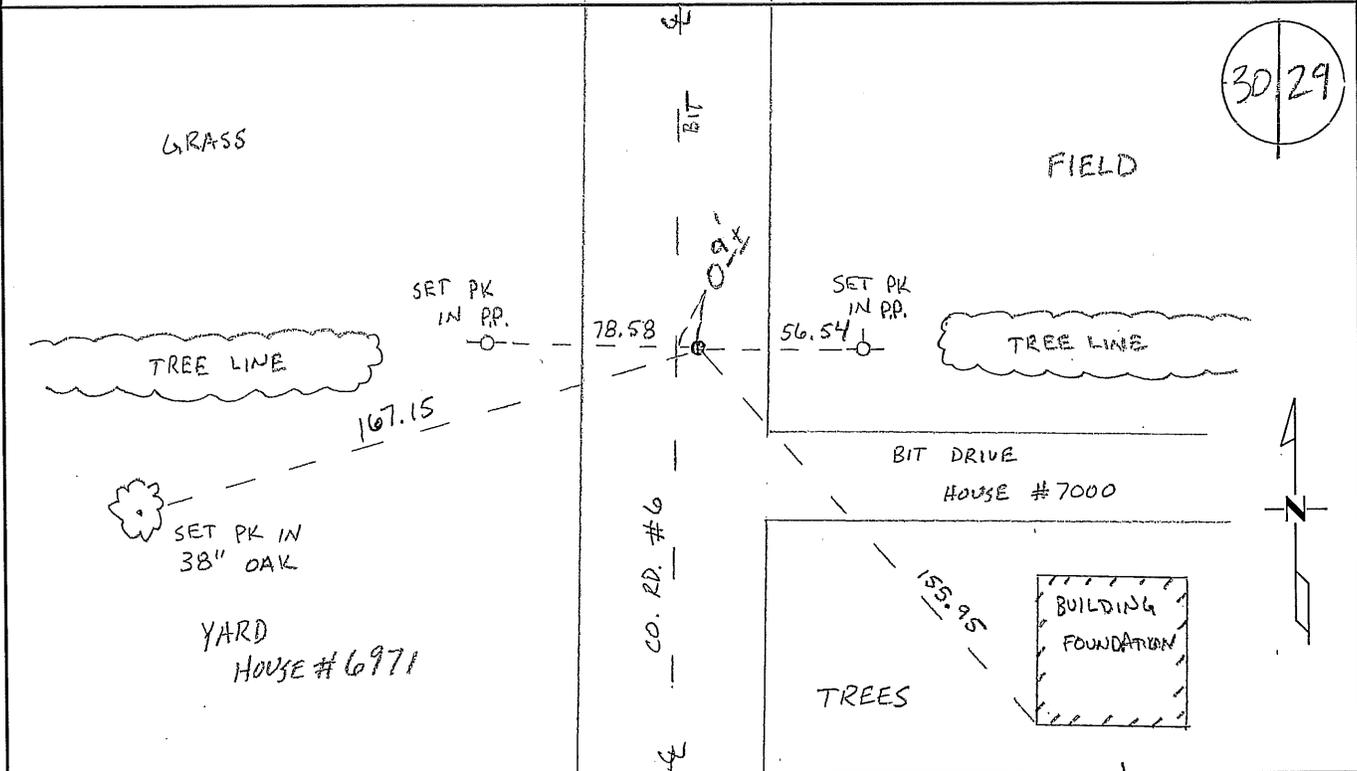

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature *Don W. Oly*  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:****I303**

The East Quarter Corner of Section 30, Township 37 North, Range 28 West, Maywood Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

20' Blk Ash	S 11 E	19 links
20' Lind	N 45 W	26 links

1912 County Surveyor's Record Book 2, on pages 442 and 443 and Record Book A, Map No. 18, shows a survey of Section 29 by Samuel S. Chute. Corner is marked by an iron monument. Survey gives a distance of 41.04 chains (2708.64 feet) to the SW corner and 40.09 chains (2645.94 feet) to the NW corner of Section 29. Notes show a deflection angle of 0 degrees 46 minutes left, running south to north.

1944 County Engineer's Notebook No. 162 contains a road survey for SAR 6 running from south to north on section line. Corner is shown marked by a 2" hub set in center of road as a POT. Fence line east is 2 feet north. Ties:

SW Cor. School	SE	155.95'
12' W. Oak	SW	167.2'

Stationing gives distances of 2708.7 feet to the SE corner and 2644.9 feet to the NE corner. Note: PI of 0-50' left is 326.8 feet north of the 1/4 corner. Also notes show 1/16<sup>th</sup> corner being an iron sled shoe 1322.1 feet south of the NE corner, being 2.6 feet west of centerline.

No Date County Surveyor's Record Book 2, page 444, shows iron at corner.

1993 Sidney Williamson, LS 10918, found a 1" solid iron pin and replaced it with a cast iron monument. Filed Certificate of Location (No. 227415) that shows a distance of 2677.26 feet to NE corner and 2676.97 feet to SE corner.

***NOTE: Distances between 1912, 1944, and 1993 check within a foot between section corners, but the 1912 and 1944 distances would put the 1/4 corner about 32 feet north of the 1993 position. Needs further field checking.***

2007 A rebar was found fitting Mr. Williamson's distance north within 0.3 feet and south within 0.4 feet. The 1944 ties were also found with the ties intersecting 33.87 feet north of the found rebar fitting north-south centerline and occupation to east and west. (Needs further checking)

2008 The County Surveyor's Office searched and found the ties from the 1944 survey. The resulting corner position gives 2643.68 ft. to the NE Cor. and 2710.41 ft. to the SE Cor., which agrees with distances to same from 1912 and 1944 distances. Position falls 0.9' east of centerline and agrees with tree lines to the east and west. The Surveyor accepts the position as re-established by 1944 ties to old School and Oak, as marking the obliterated position. Ties were updated.

County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-140501.210  
 E-547445.776

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 30, Township 37, Range 28, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

■ On 8-17-93 found a 1" SOLID IRON  
DATE

left monument as found,  lowered monument,  removed monument (explain)

■ On 10-1-93 placed a STANDARD CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

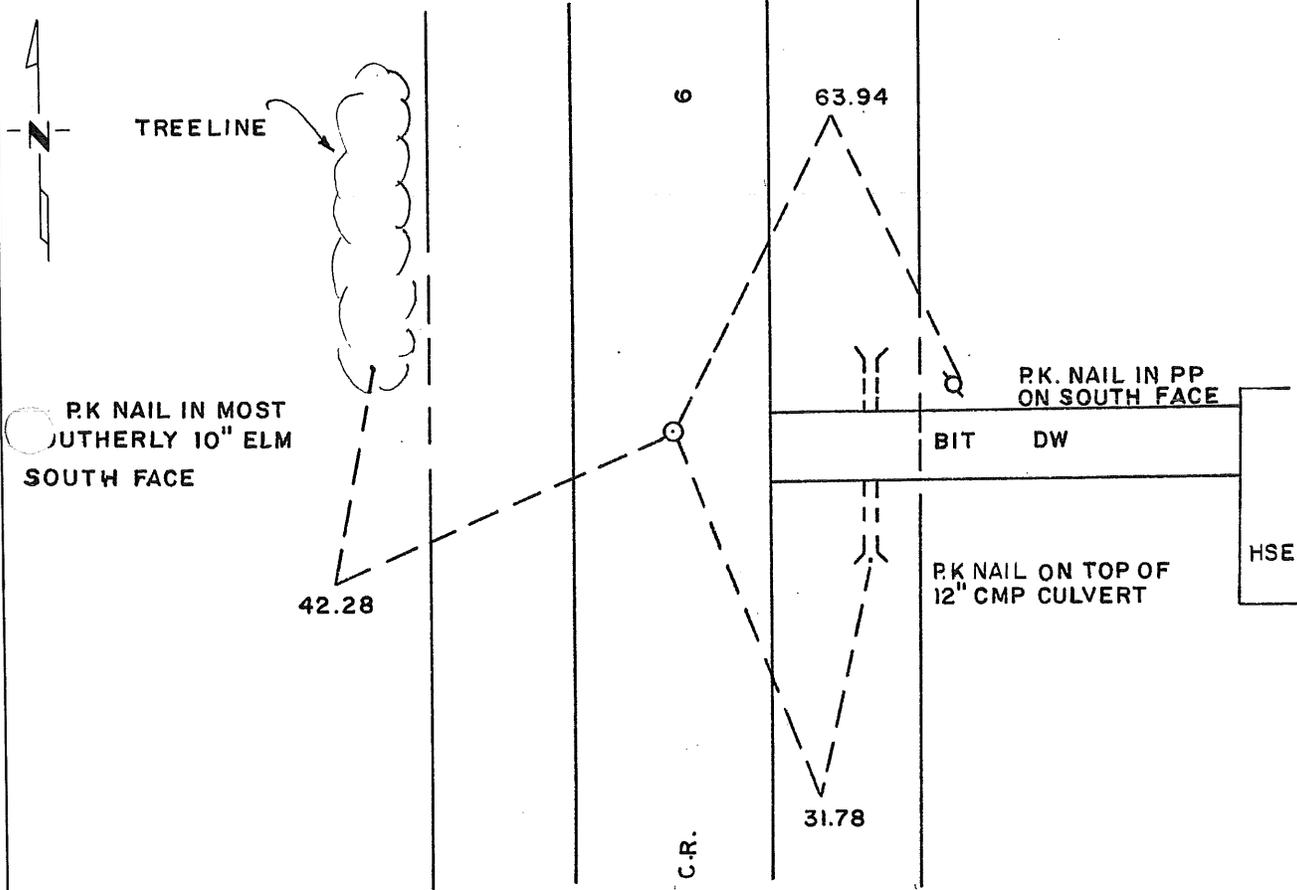

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney F. Williamson 1/5/95  
SIGNATURE DATE

Registration No. 10918

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

1. In 1855, the original government survey was performed.
  - ~~2. On August 17, 1993, Williamson-Kotsmith, Inc. found a 1/2 inch open pipe at the intersection of the centerlines of C.S.A.H. Number 4 and a Township Road.~~
  - ~~3. On October 1, 1993, Williamson-Kotsmith, Inc. placed a Standard Cast Iron Monument at the same location.~~
- 
2. On August 17, 1993, Williamson-Kotsmith, Inc. found a 1 inch solid iron pin on the centerline of C.S.A.H. Number 6, it measures 2,677.26 feet to the northeast corner and 2,676.97 feet to the southeast corner.
  3. On October 1, 1993, Williamson-Kotsmith, Inc. removed a 1 inch solid iron pin and placed a Standard Cast Iron Monument at the same location.

227415

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

MAR 3 8 40 AM '95

ALICE G. EDWARDS  
COUNTY RECORDER

BY YDZ DEPUTY <sup>KM</sup>