

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:44AM


Signed: CK
MARILYN J NOVAK G V T
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 35, Township 37N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/28/08 found a PK AT CENTERLINE OF ROAD FLUSH TO BIT SURFACE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

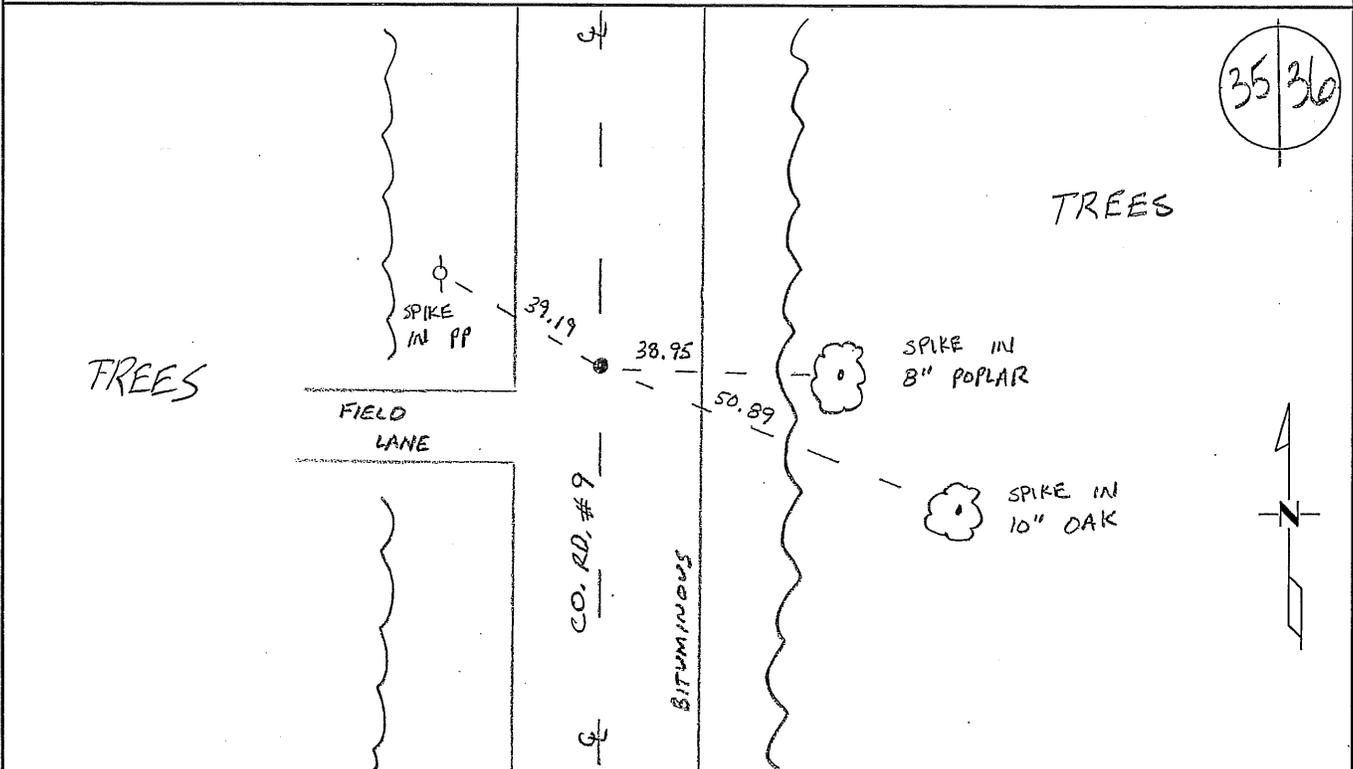

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/04/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**I353**

East Quarter Corner of Section 35, Township 37 North, Range 28 West, Maywood Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" W Ash	N 75 W	14 links
13" Elm	S 60 ½ E	20 links

1901 County Surveyor's Record Book A, Map No. 35, is a survey of Section 35 by John Whilt with a distance of 39.97 chains (2638.02 feet) to the NE corner Sec 35 and a distance of 38.96 chains (2571.36 feet) to the SE corner Sec 35.

No Date County Surveyor's Record Book 2, page 454, notes a hub in the centerline of a road.

1930 County Engineer's notebook No. 58 shows road survey by H. G. Elletson running north to south. Corner is shown as a spike with ties:

F.P.	E	17.6'
F.P.	NE	23.7'

Stationing gives distances of 2638.7 feet to the NE corner and 2577.4 feet to the SE corner with a delta angle of 1-15' left.

2008 The County Surveyor's Office searched and found a PK Nail at centerline that was set by Dennis Taylor, LS (MN PLS #15233) at centerline of a north-south road (County Road 9) and on line with field lines running east and west. The County Surveyor's Office measured 2643.75 ft. to the NE Cor. and 2576.96 ft. to the SE Cor, which agree with the 1901 and 1930 measurements, above. The deflection angle measures (north to south) 1°08'53"- left, which compares well with the 1930 measurement of 1-15' left. The Surveyor accepts Taylor's position and set ties.

County Coordinates to PK obtained by GPS
 NAD 83 (1996 Adjustment)
 N-135351.430
 E-568648.246