

Certified, Filed and or Recorded on  
Nov. 06, 2008 AT 08:54AM


Signed: CK  
MARILYN J NOVAK 6 V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 19, Township 37N, Range 28W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/16/08 found a CAST IRON MONUMENT UP 0.1'
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

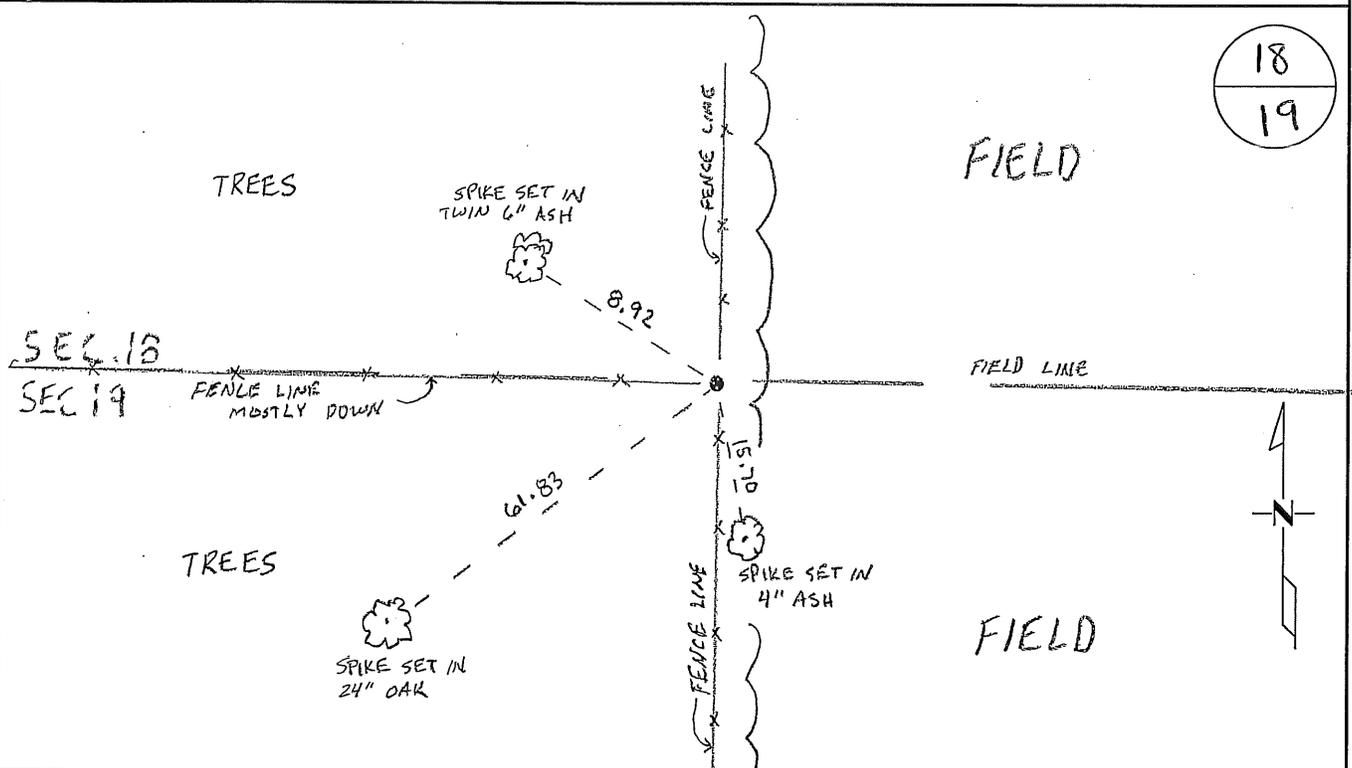

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/03/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

I191

North Quarter Corner of Section 19, Township 37 North, Range 28 West, Maywood Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established this corner and set a wood post and bearing trees were recorded as follows:

14" W Oak	N 39 ½ E	28 links
12" Maple	S 13 W	32 links

1915 County Surveyor's Record Book 2, pages 420 and 421, and Record Book A, Map No. 15, contain a survey by J. P. Soderstrum of Section 18. Notes he found an old tamarack post set by Sabin Peterson in same location as post set by Whilt, County Surveyor. However, Wm Milton claims the post to be a random post set by Whilt and was told so by him. Therefore he ran section line and set corner on true line. Map shows a distance of 74.82 chains between section corners and he set corner 34.84 chains (2299.44 feet) east of the southwest corner and 39.98 chains (2638.68 feet) west of the southeast corner. Made ties: 14" Br. Oak S 34 ½ W 135 links (89.1 feet) and 12" Br. Oak S 68 ½ W 43 links (28.38 feet).

1979 William Lunser, LS 9394, set ½" iron pipe at intersection of fence lines north, south, and west.

1988 William Lunser replaced iron pipe with a Cast Iron Monument. Filed Certificate No. 191269. Distances shown as 2295.16 feet to NW corner and 2640.69 feet to NE corner of Section 19. An angle of 180-09-07 to the north is given.

*(NOTE: Using Soderstrum's information with Lunser's, it appears Lunser's corner is within 4 feet of line and 4 feet of distance. Lunser gives a tie of 61.46 feet southwest to a 16" Oak. Should check for Soderstrum's ties.)*

2008 The County Surveyor's Office searched and found the cast iron monument as set by Lunser in 1988. Distances to the NW Cor. and the NE Cor. give 2294.77 ft. (34.77 ch.) and 2640.87 ft. (40.01 ch.), respectively, which agrees with Soderstrum's 1915 measurements. Soderstrum's bearing trees were not recovered. Ties from Soderstrum's survey were not recovered. The position falls at the intersection of a north-south and west fenceline and is also agrees with a field line to the east. The Surveyor accepts the position as marking the best evidence. Ties were updated.

County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-148485.697  
 E-544707.530

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 19, Township 37, Range 28, 4<sup>th</sup> P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 12-8-88 placed a Benton County Cast Iron Monument  
DATE

### SKETCH OF REFERENCE TIES

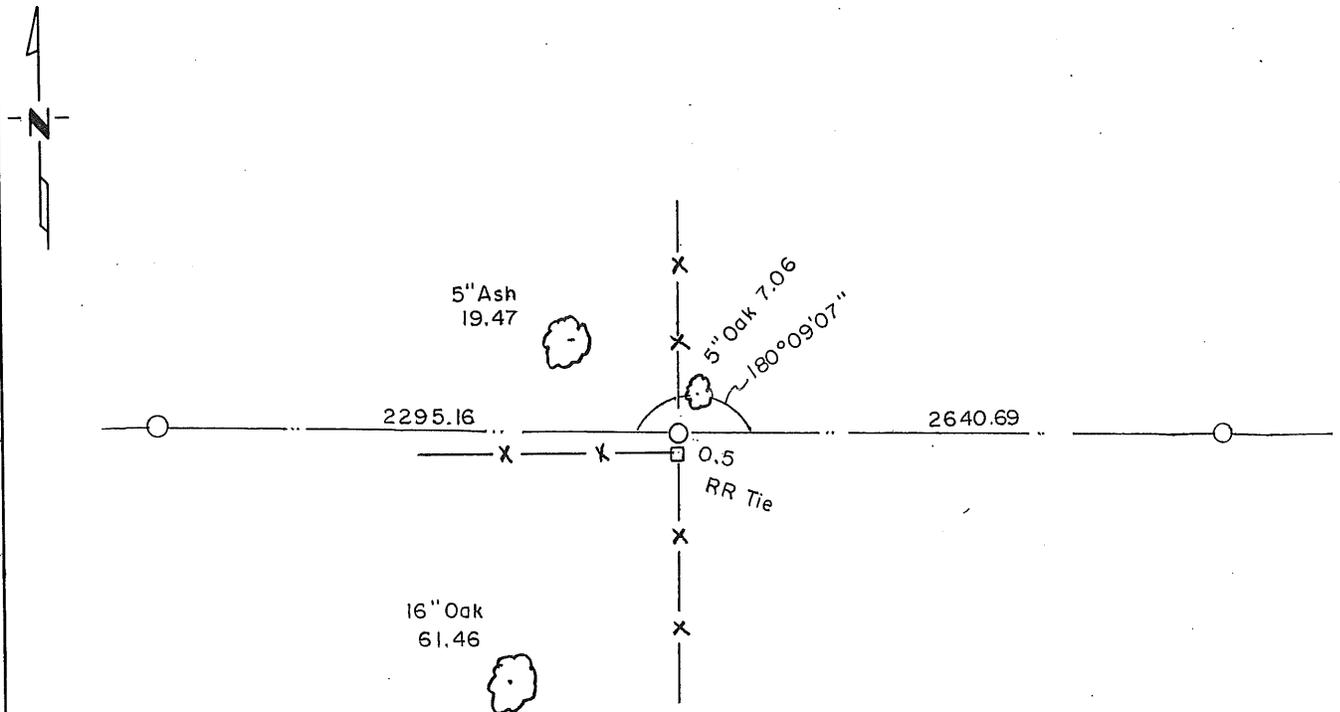

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Luman 12/15/88  
SIGNATURE DATE

Registration No. 9394

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

9-19-79 Set 1/2" iron pipe at the intersection of a fence line north-south and a fence line to the west. Distance measured to east, west and north verified this location.

12-8-88 Located 1/2" iron pipe as set in 1979 and replaced with Benton County Cast Iron Monument.

191269

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 12 09 PM '89

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY *[Signature]* DEPUTY