

A 361606

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:51AM


Signed: CK
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 21, Township 37N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/20/08 found a 1/2" IRON PIPE OPEN UP 0.3'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

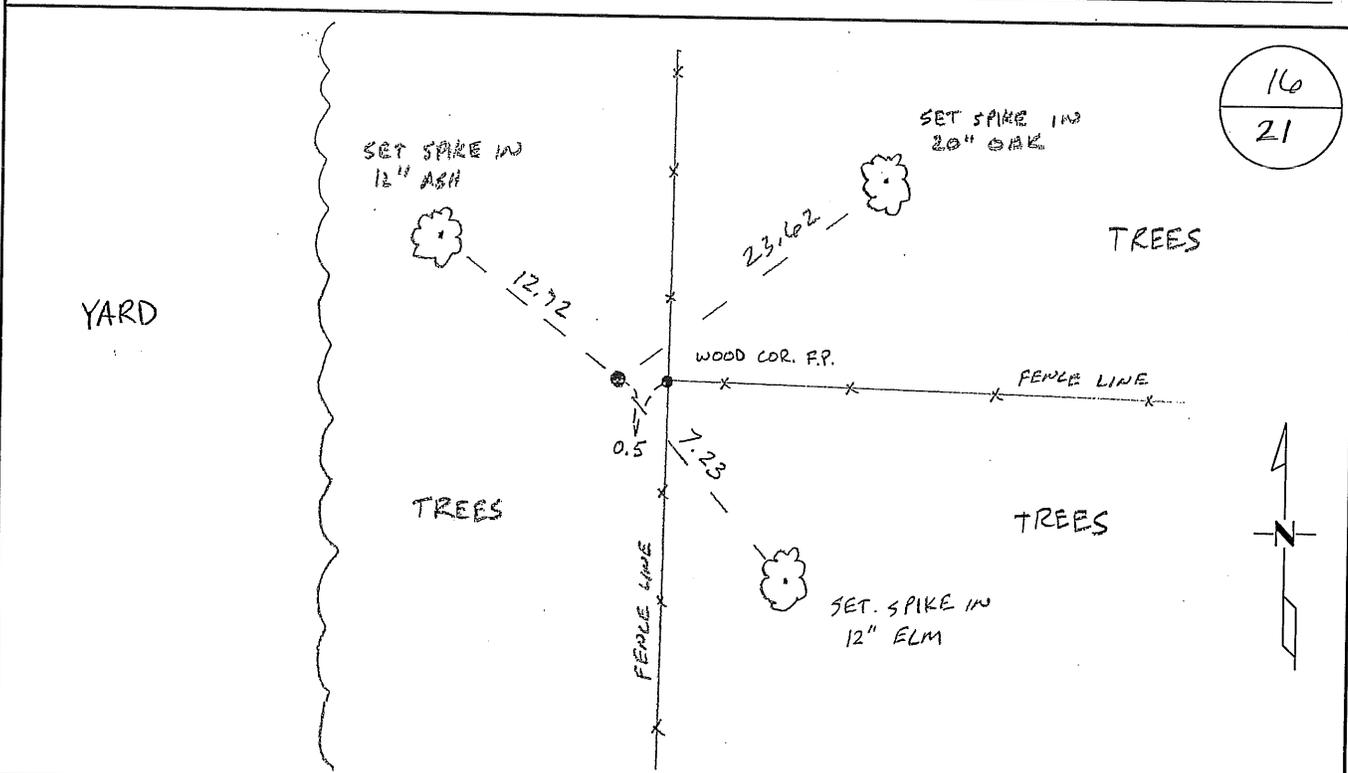

16
21

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/03/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**I211**

North Quarter Corner of Section 21, Township 37 North, Range 28 West, Maywood Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|--------|----------|
| 28" Elm | N 56 E | 54 links |
| 13" Blk Ash | S 73 W | 38 links |
- 1951 MN/DOT alignment map for TH 23 shows corner assumed at fence intersection with fences north-south and east-west. Point is 574.8 feet south of centerline.
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2008 The County Surveyor's Office searched and found a 1/2" iron pipe approximately 0.3' above ground and 0.5' west of the intersection of a north-south fence and an east fence line. Position measures 574.6 feet to the centerline of TH 23 which agrees well with the 1951 distance. Surveyor accepts the 1/2" iron pipe as marking the best evidence and updated ties.

County Coordinates to 1/2" iron pipe obtained by GPS
 NAD 83 (1996 Adjustment)
 N-148297.922
 E-555296.619