

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:20PM


Signed: *MJ*
MARILYN J NOVAK *B V*
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 27, Township 37N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/30/08 found a 1/2" IRON PIPE CAP IS DESTROYED / UNREADABLE
DOWN 0.5'
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

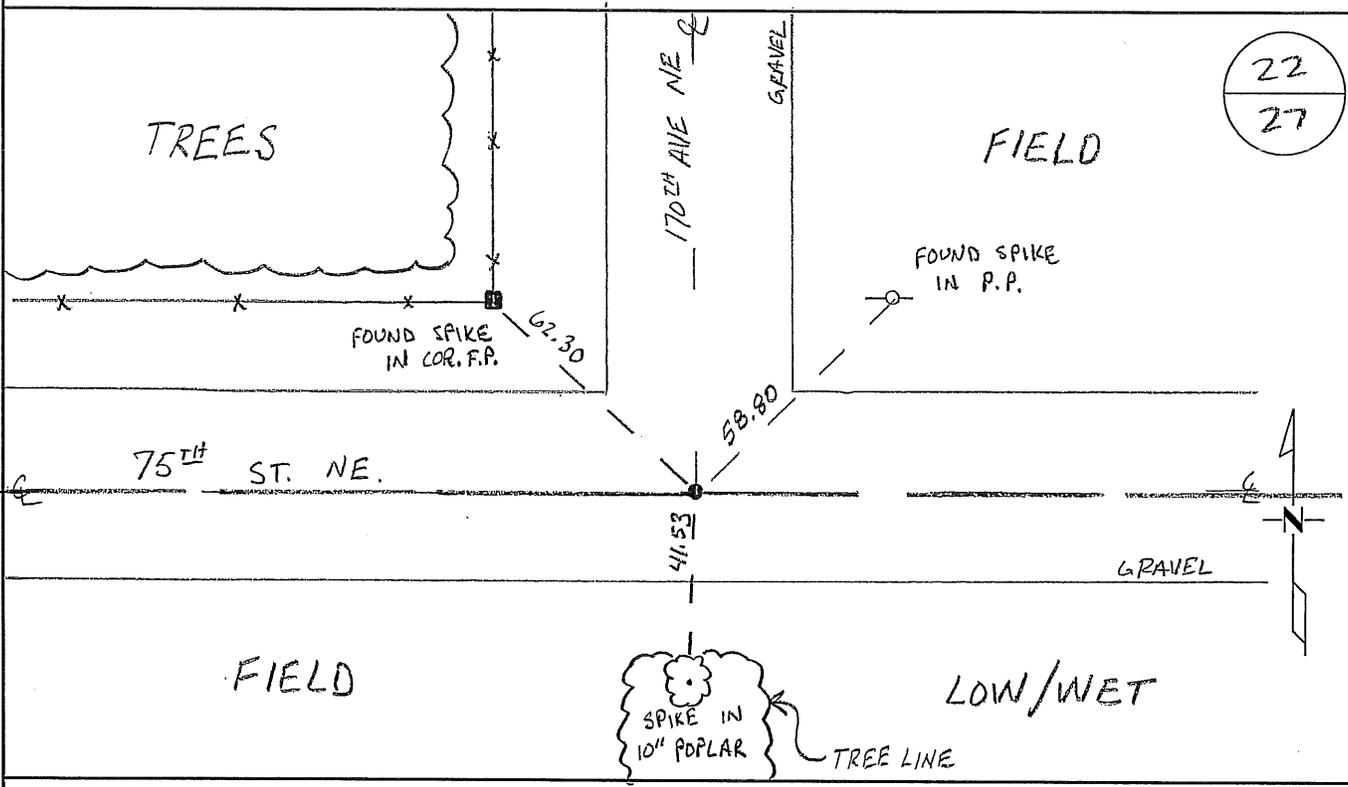

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature *Jim W. Oley*
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

I271

North Quarter Corner of Section 27, Township 37 North, Range 28 West, Maywood Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

7" Lind	N 26 E	13 links
12" Maple	S 12 W	17 links

1902 County Surveyor's Record A, Map No. 38, shows a survey of Section 27 by John Whilt. Corner is shown as a post with a distance of 40.00 chains to the NE corner and 40.22 ½ chains to the NW corner.

Record Book 2, page 428, gives tie: 8" Sugar Maple S 66 ½ W 55 links

1929 County Engineer's notebook No. 58 shows road survey by H. G. Elletson running west to east. Corner is shown as a stake with ties:

Cor. F.P.	S	24.5'
Cor. F.P.	NW	30.8'

2001 Westwood Professional Services, Inc. found PK nail in road intersection.

2008 The County Surveyor's Office searched and found a ½" iron pipe at the centerline intersections of an east-west gravel road (75th St. NE) and a road leading north (170th Ave NE). Distances to the NW and NE Corners give 2666.95 ft. (40.41 ch.) and 2652.27 ft. (40.18 ch.). Proportionate measure to Whilt's 1902 measurements places the position within 0.12 ft. of the current position. The Surveyor accepts the monument as marking the obliterated position and made ties to same.

County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-143049.961
 E-560704.572