

A 361603

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:50AM

Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 34, Township 37N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/20/08 found a 1/2" IRON PIPE OPEN DOWN 0.2'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

27
34

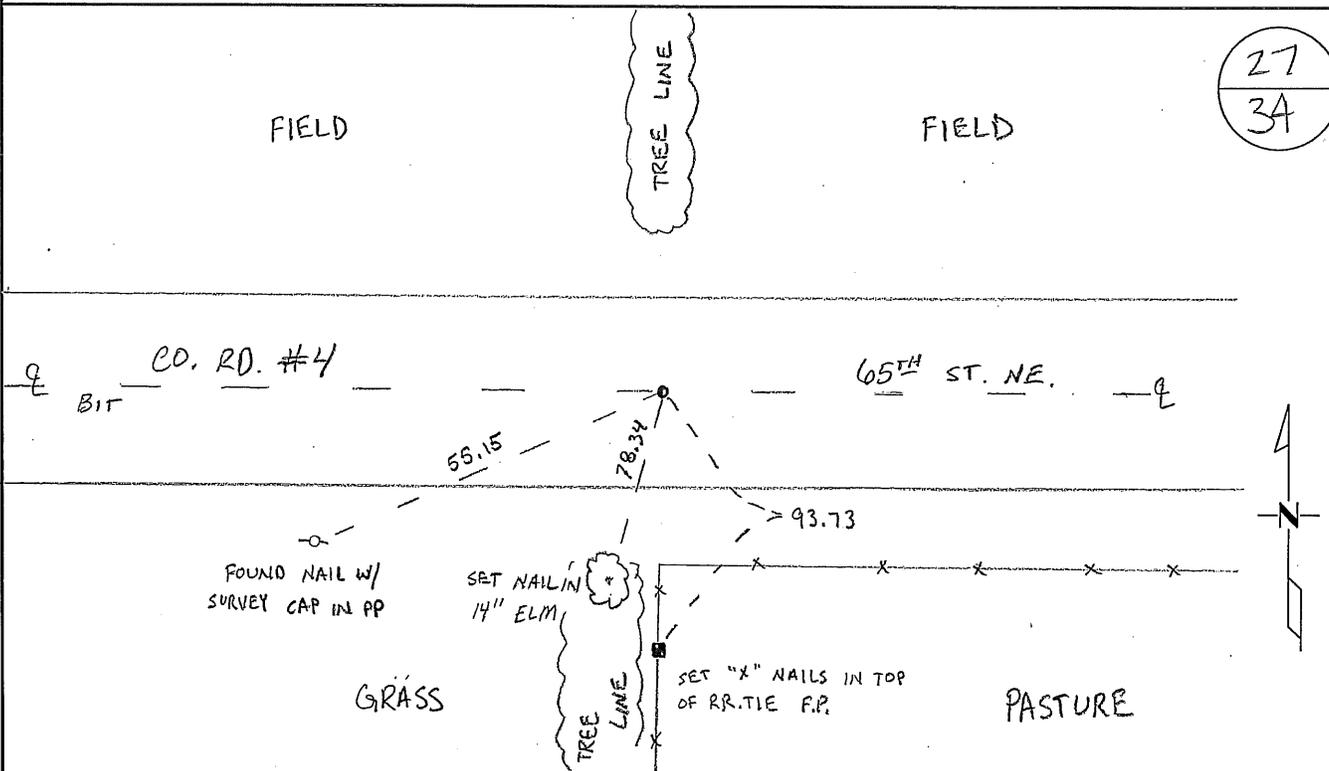

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oleg
Deputy Benton County Surveyor
License No. 45672

Date: 11/03/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**I341**

North Quarter Corner of Section 34, Township 37 North, Range 28 West, Maywood Township, 4th
 Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

16" Bur Oak	S 85 E	43 links
30" Bur Oak	N 81 W	64 links

A line tree was noted as a 10" Elm West 0.50 chains.

1902 County Surveyor's Record Book A, Map No. 38, shows a survey of Section 27 by John Whilt. Corner is shown as a post with distances of 40.23 chains (2655.18 feet) to the SW corner and 39.51 chains (2607.66 feet) to the SE corner.

1926 County Engineer's notebook No. 49 contains survey for CR 4 running west to east. Notes show ¼ corner 1.2 feet right of POT on fence lines north and south with same ties as listed in County Surveyor's Record Book 2, pages 438 & 452:

TP	NE	31.5		
CorFP	S	34.4		
Later ties for POT:	18" Box elder	SE	72.2	
	PP	SW	43.2	

Stationing gives distances of 2634.6 feet to the NW corner and 2599.4 feet to the NE corner.

1940's County Engineer's Notebook No. 160 contains road survey for SAR No. 4 running west to east along the section line. Corner is shown 1.2 feet right of POT with fence lines north and south. Ties to POT:

18" Box Elder	SE	72.2'
PP	SW	43.2'
10" Elm	S	73.0'

Stationing gives distances of 2636.5 feet to the NW corner and 2598.5 feet to the NE corner to the POT.

1993 Sidney Williamson, LS 10918, found a ½ "solid iron pin and replaced with a CIM. Filed Certificate of Location (No. 227422). Distances given: 2633.62 feet to the NW corner and 2601.10 feet to the NE corner of Section 34.

Note: Corner found in 1993 appears to be within 8 feet of the proportion to the 1902 survey, which probably is within reasonable tolerance with the overall section line distances being 28 feet different. Corner is about 3 feet west of the highway information.

2003 County Coordinates computed from traverse information furnished by Surveying & Engineering Professionals, Inc.

County Coordinates NAD 83 (1996 Adjustment) obtained by GPS

N- 137828.884

E- 560723.384

2008 The County Surveyor's Office searched and found a ½" iron pipe approximately 0.2' below the surface of the centerline of an east-west bituminous road (County Road No. 4) and on line with a south fence line. Distances measured to the NW and NE corners are 2633.58 feet and 2600.92 feet respectively. These distances check well with the above 1926 distances and subsequent surveys. Surveyor accepts the position as marking the corner and ties were made.

County Coordinates NAD 83 (1996 Adjustment) obtained by GPS

N- 137828.911

E- 560723.444

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHQUARTER Corner of Section 34, Township 37, Range 28, _____ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 8-17-93 found a 1/2 SOLID IRON
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-1-93 placed a STANDARD CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

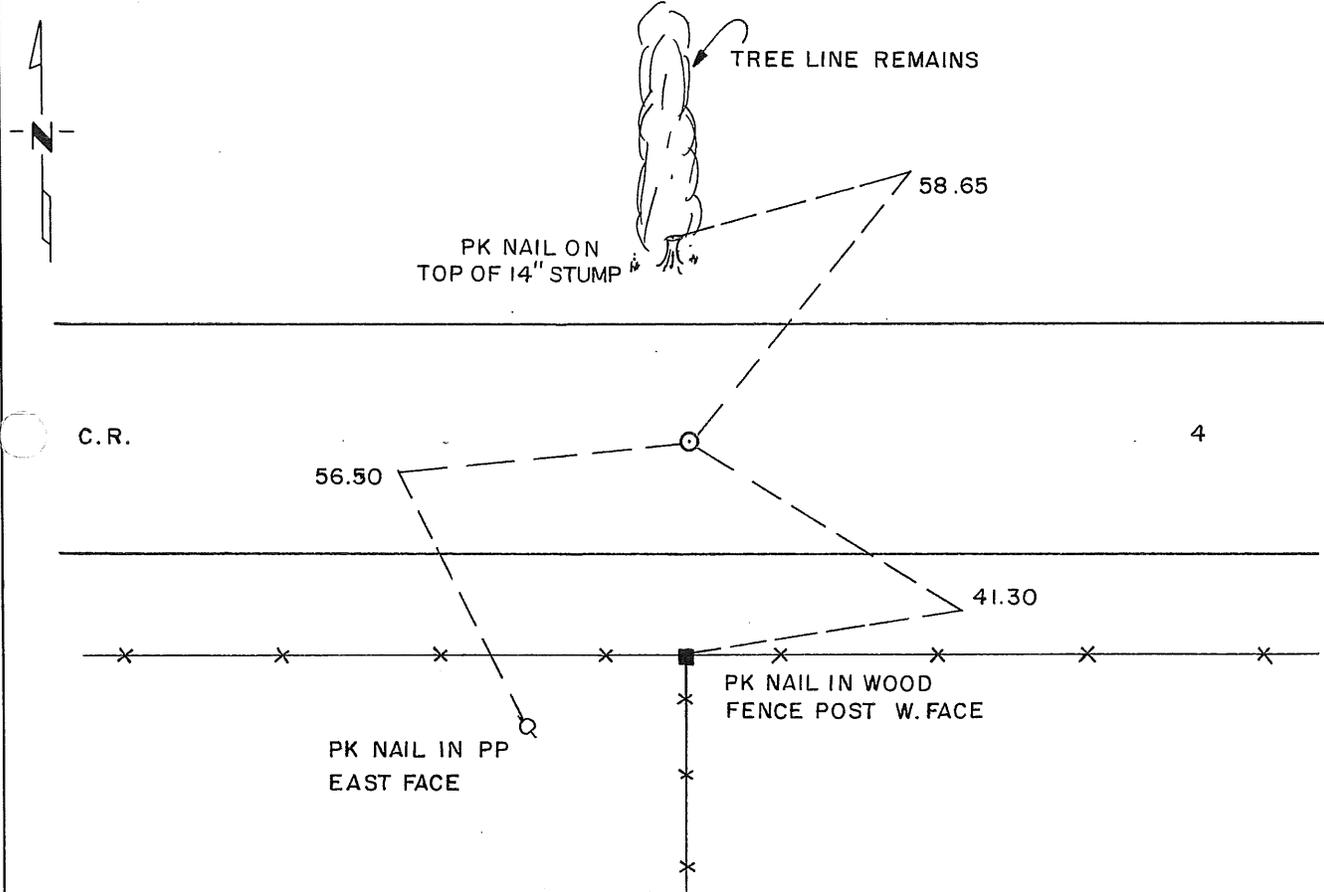

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney T. Williamson 1/5/95
SIGNATURE DATE

Registration No. 10918

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 ____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. In 1855, the original government survey was performed.
2. On August 17, 1993, Williamson-Kotsmith, Inc. found a 1/2 inch solid pin on the centerline of C.S.A.H. Number 4. A search of this area and the single proportionate measurement area found no other evidence of a monument.
3. On October 1, 1993, Williamson-Kotsmith, Inc. placed a Standard Cast Iron Monument at the same location, ~~in the same location as the original~~. It measures 2,633.62 feet to the northwest corner and 2,601.10 feet to the northeast corner.

227422

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

MAR 3 8 45 AM '95

ALICE L. FRIEDELMEYER
COUNTY RECORDER

BY MA DEPUTY RM