

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHQUARTER Corner of Section 35, Township 37, Range 28, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

■ On 8-17-93 found a 1/2" OPEN IRON  
DATE

left monument as found,  lowered monument,  removed monument (explain)

■ On 10-1-93 placed a STANDARD CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

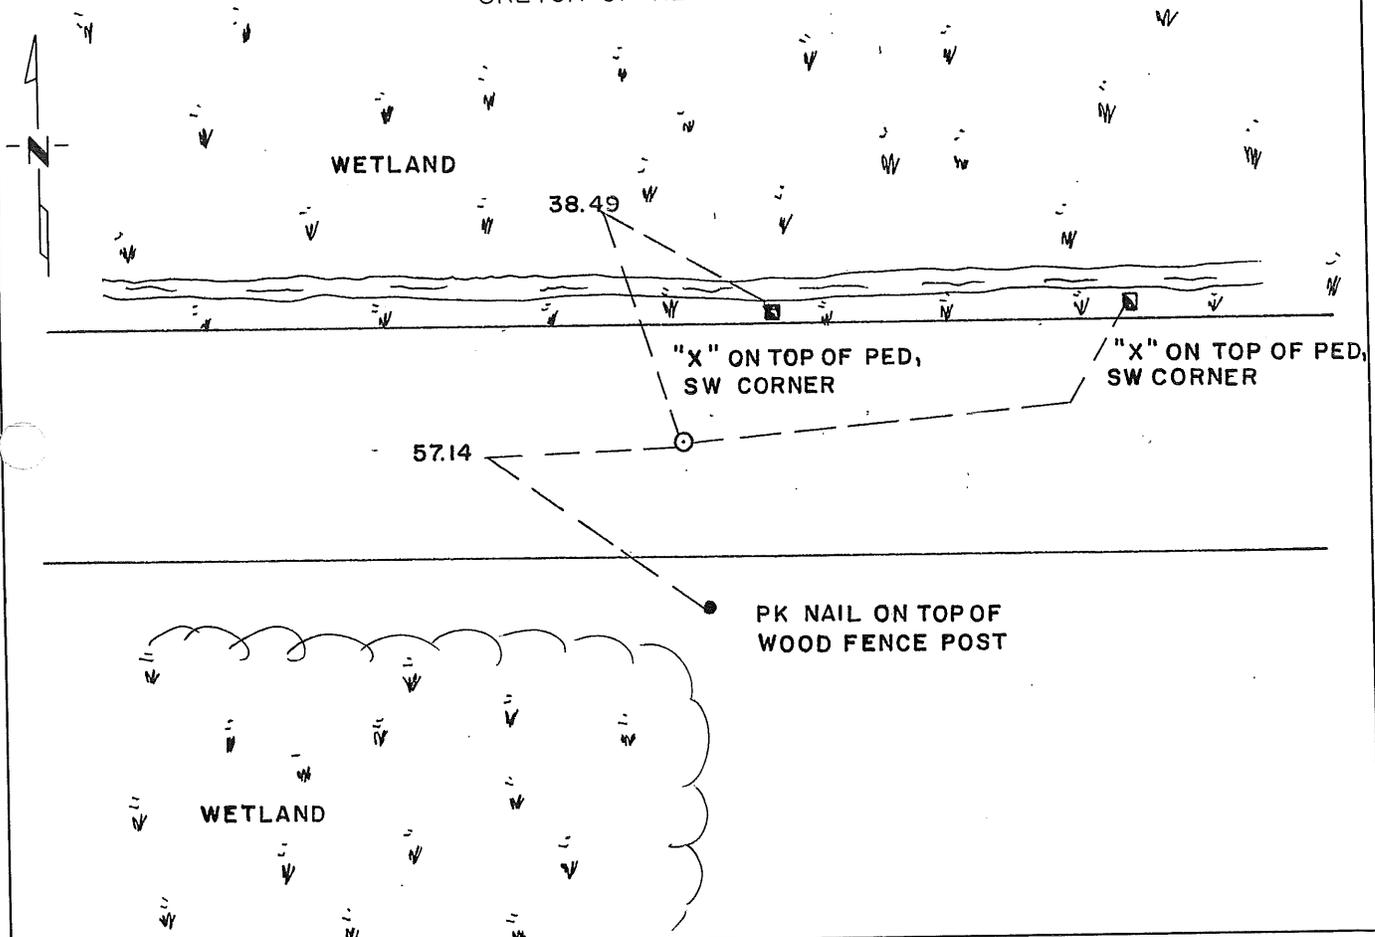

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 1/5/95  
SIGNATURE DATE

Registration No. 10918

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

1. In 1855, the original government survey was performed.
2. On November 16, 1983, David P. Regan, L.S. Number 12236 found a 1/2 inch iron on the centerline of C.S.A.H. Number 4 and a fence line to the south and established and recorded ties.
3. On October 1, 1993, Williamson-Kotsmith, Inc. placed a Standard Cast Iron Monument at the same location. It measures 2,656.24 feet to the northwest corner and 2,648.04 feet to the northeast corner.

227420

OFFICE OF  
DEPT. OF RECORDS  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

MAR 3 8 43 AM '95

ALICE S. ECKHART  
COUNTY RECORDER

BY MA DEPUTY ym

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 35, Township 37, Range 28, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

■ On 11/16/83 found a capped  $\frac{1}{2}$  inch iron pipe in center line of County Road east-west and fence line south

■ left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

## SKETCH OF REFERENCE TIES

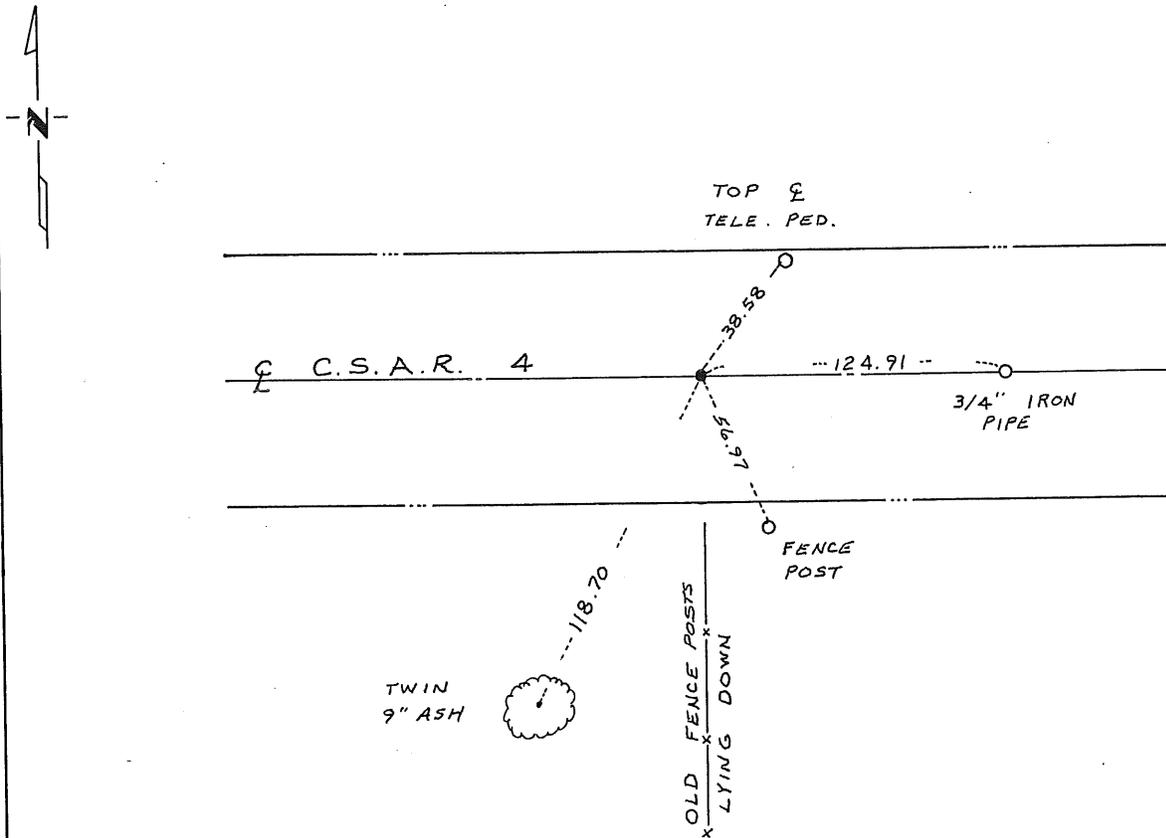

Statement of evidence relative to this corner location is on back of page. **167980**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David O. Ryan 1/3/84  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 .M. on the 12th day of January A.D., 19 84

County Recorder F.A. Johnson  
Register of Deeds

By \_\_\_\_\_, Deputy

DOCUMENT NO. 167980