

Office of the County Recorder, BENTON County, Minnesota  
I hereby certify that the within instrument was filed for record in this office on the  
       day of       , 200      .

COUNTY RECORDER

By        Deputy.

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 7, Township 37, Range 28  
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 10/22/01 found a RR Spike  
DATE

left monument as found     lowered monument     removed monument (explain)

On 10/22/01 placed a Cast Iron Monument  
DATE

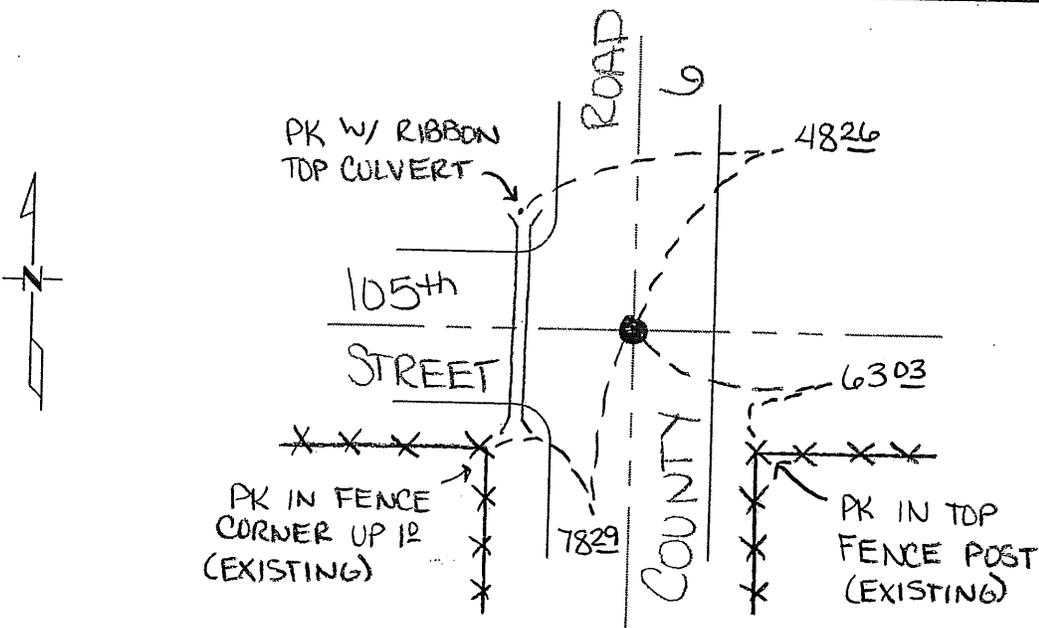

Ref. Job #20005753

Ties that are found and in good condition are noted as 'existing'. New tree and power pole ties are to the head of a nail with a brass disk marked 'Corner Tie'.

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 10/14/02 License No. 12604

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Statement of Evidence:

The Northeast Corner of Section 7, Township 37 North, Range 28 West, Maywood Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

In July of 1855, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

14" Elm	N 61 W	19 links
13" Lind	S 32 E	9 links

On July 21, 1915 J.P. Soderstrum found an iron in the centerline of roads. This was noted on map No. 33 in Book 2, page 394 of the County Surveyors Notes.

In 1955, the County Surveyors Records in Book 2, page 394 the notes refer to an iron pipe with the following reference ties.

Cor F.P.	E	31.9
F.P.	SW	64.3

In 1966, the County Surveyors Records in Book 2, page 396 the notes refer to an iron pipe in place with the following reference ties.

F.P.	SW	64.5
Cor F.P.	E	32.6

Undated and unspecific ties note the following.

5" Boxelder	E	95.7
F.P.	SW	64.5
Cor F.P.	E	32.6

On November 18, 1985 Benton County Highway Department records indicate an iron in place at his location.

On December 26, 1995 William Lunser found a 1" iron pin at the intersection of the centerlines of County Road 6 (running north and south), 105<sup>th</sup> Street NE (running west) and a fence line east. Reference ties were established. A Certificate of Location (#234179) was filed.

On September 5, 2000 Westwood Wellen found a RR spike at the intersection of the centerlines.

On October 22, 2001 Westwood Professional Services, Inc. found a RR spike at the intersection of the centerlines of County Road 6 (running north and south), and 105<sup>th</sup> Street NE (running west). We removed the iron monument and set a cast iron monument at the location.

MARILYN J. NOVAK  
COUNTY RECORDER  
BY *Marilyn J. Novak*  
DEPUTY

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

291185


2002 OCT 30 P 3: 23

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST corner of Section 7, Township 37, Range 28, 4th P.M.  
Benton County, Minnesota.

On Dec 26, 1995, A one inch iron pin (I.P.) was found at this location.

## SKETCH OF REFERENCE TIES

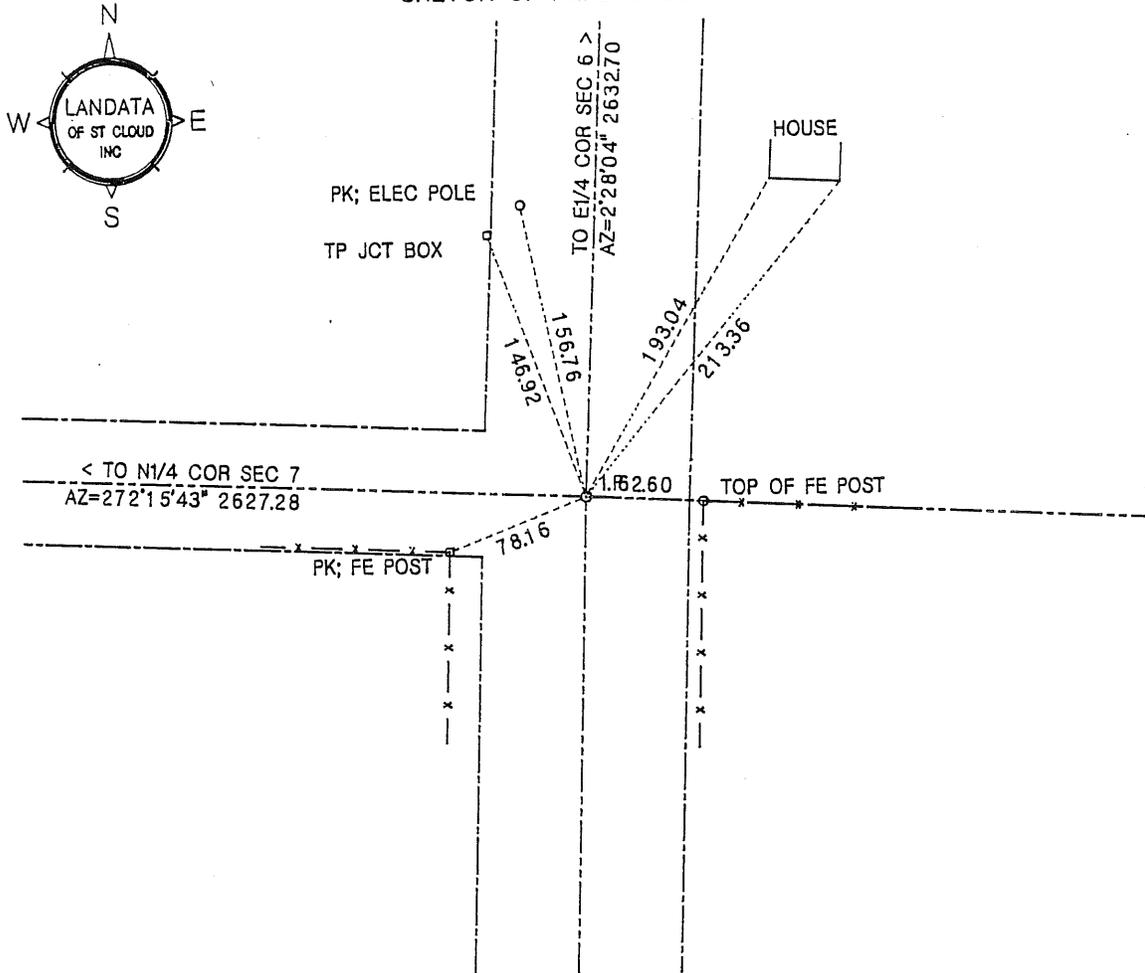

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*William F. Lunser* 3/13/96  
William F. Lunser, L.S. Date  
Mn Reg No 9394

OFFICE OF THE COUNTY RECORDER  
Benton County, Minnesota  
I hereby certify that this document was filed in this office at \_\_\_:\_\_\_M. on the \_\_\_ day of \_\_\_\_\_, 19\_\_\_.

County Recorder \_\_\_\_\_

By \_\_\_\_\_ Deputy


DOCUMENT NO. \_\_\_\_\_

STATEMENT OF EVIDENCE:

Records of the Benton County Hwy Dept indicate an iron pin in place at this location on 11/18/85.

Hwy reference ties have been destroyed. A search of the area revealed the marker which conforms to well defined occupation lines consisting of road centerlines north, south and west and fence line east.

After comparing measured distances to those of the G.L.O. I accepted the Hwy Dept pin as the best evidence of the original corner.

  
William F. Lunser, L.S.

2 3 4 1 7 9

BENTON COUNTY RECORDER  
BENTON COUNTY, MO  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

APR 10 2 35 PM '96

ALICE O. ENGELMEYER  
COUNTY RECORDER

BY Mm DEPUTY km