

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:43PM

Signed: BW
MARILYN J NOVAK 6 V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER



CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 17, Township 37N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/15/08 found a 1/2" IRON PIPE DOWN 0.2'

left monument as found lowered monument removed monument (explain)
 On _____ placed an _____

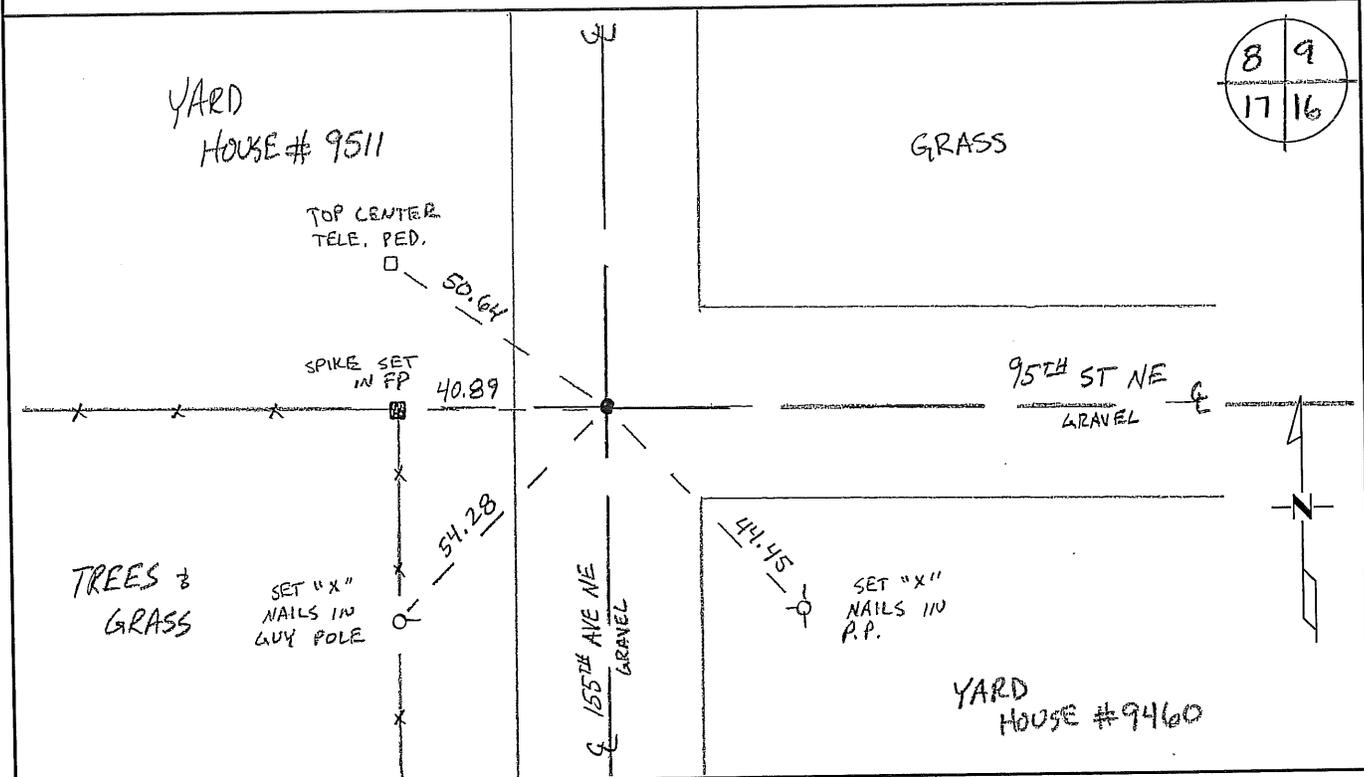

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008
PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

I172

Northeast Corner of Section 17, Township 37 North, Range 28 West, Maywood Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

9" Ironwood	N 75 ½ E	18 links
12" Bur Oak	S 10 W	30 links

1938 County Engineers' Notebook No. 119 shows survey of CAR 27 running from north to south. Notes show approximate corner being a set spike in intersection with town road east and west fence. (Notation: "Try to find in spring") Ties to set spike:

F.P.	SW	44.3'
F.P.	NW	45.6'

1968 County Highway notes in same notebook show a hub set at corner with ties:

TP	NE	46.2
PP	SE	43.65'

2008 The County Surveyor's Office searched and found a ½" iron pipe at 0.2' below the centerline of a north south road (155th Ave. N.E.) and a road to the east (95th St. N.E.). Said position appears to agree with the 1968 tie to a PP to the S.E. (44.45 ft. vs. 43.65 ft.). Position is accepted as the best evidence and ties were made.

County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-153714.288
 E-552558.871