

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 33, Township 37, Range 28, _____ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

■ On 8-17-93 found a 1" SOLID IRON
DATE

left monument as found, lowered monument, removed monument (explain)

■ On 10-1-93 placed a STANDARD CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

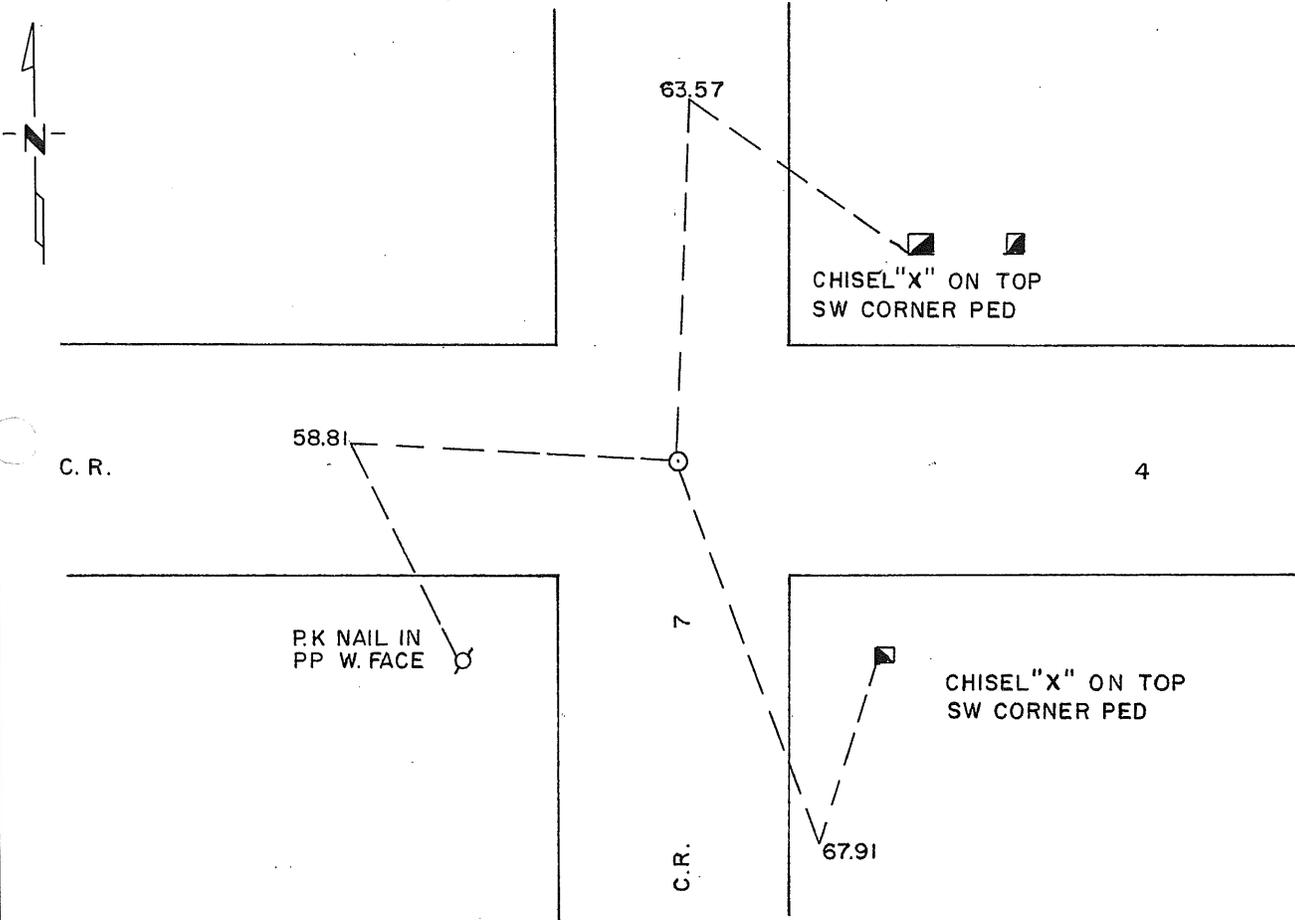

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 1/5/95
SIGNATURE DATE

Registration No. 10918

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. In 1855, the original government survey was performed.
2. On August 17, 1993, Williamson-Kotsmith, Inc. found a 1 inch pin at the intersection of the centerlines of C.S.A.H. Number 4 and C.S.A.H Number 7. this appears to be the same "iron" found by the Benton County Highway Department in the early 1960's on Project Number S.P. 05-508-01.
3. On October 1, 1993, Williamson-Kotsmith, Inc. placed a Standard Cast Iron Monument at the same location.

227423

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

MAR 3 8 45 AM '95

ALICE G. EHRHARDT
COUNTY CLERK

BY 7/1/91 DEPUTY km