

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:46AM


Signed: CK
MARILYN J NOVAK G V T
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 36, Township 37, Range 28
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 21 OCT 2008 found a C.I.M. DOWN 05'
- left monument as found lowered monument removed monument (explain)
- On 21 OCT 2008 placed an PK NAIL WITH BENTON CO. SURVEY
DISC OVER FOUND MONUMENT

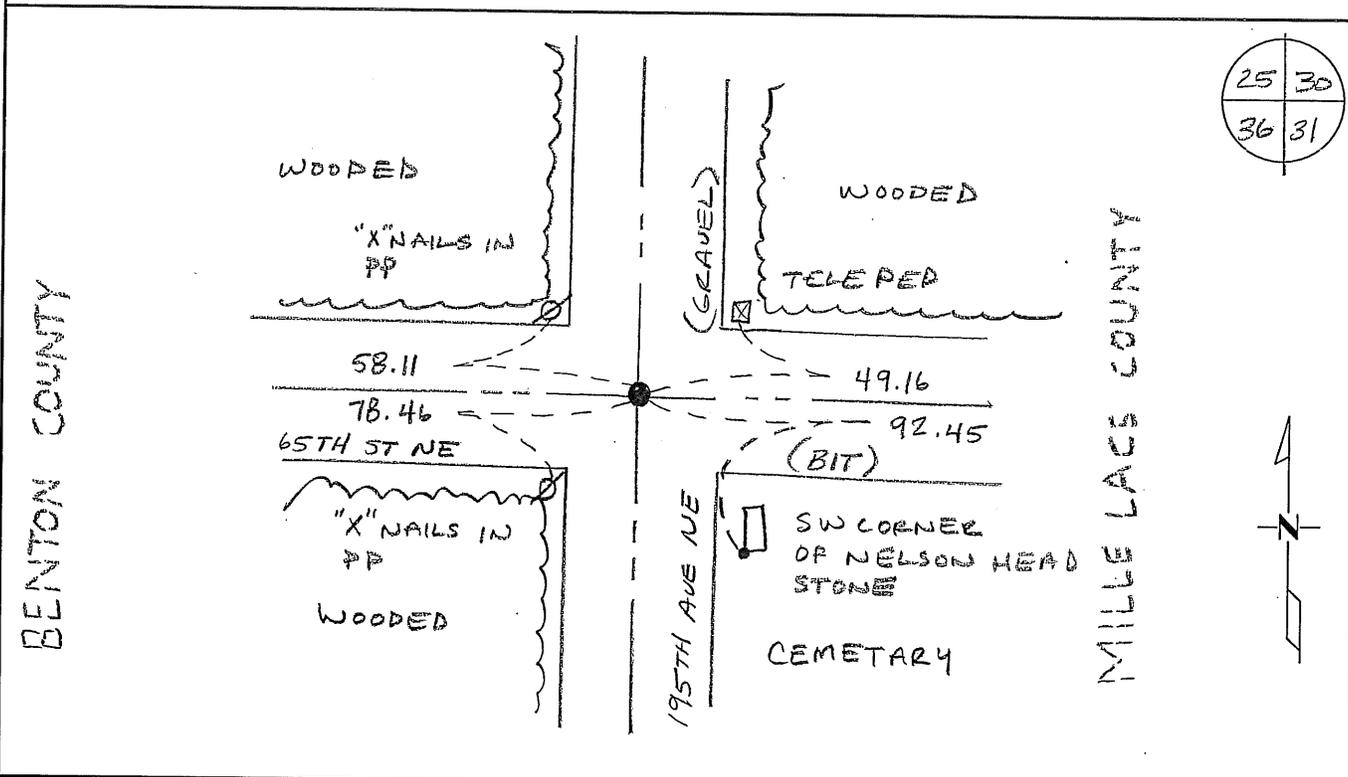

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/04/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872
 Page 1 of 2

Statement of Evidence:

I362

Northeast Corner of Section 36, Township 37 North, Range 28 West, Maywood Township, 4th
 Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Elm	S 14 E	20 links
8" Blk Ash	N 79 E	10 links
10" Blk Ash	N 58 W	37 links
8" Basswood	S 68 W	16 links

Line trees were noted as a 8" Elm South 17.23 chains and
 a 14" W Oak North 21.78 chains.

Undated Reference ties to an iron

24" Twin Oak	NE	125.7
16" R Oak	SW	96.0
18" Elm	SW	127.6

Unspecific reference ties exist

1902 County Surveyor's Record Book A, Map No. 30, contains a survey of Section 25 by John Whilt.

1909 Mille Lacs County Surveyor's Record Book B, pages 196 & 197, S. L. Kennedy notes in 1916 that R.S. Chapman established corner found Gov't Ash stumps standing NE and NW with distances good and bearings approximate. Supported with area witnesses. Kennedy notes good gov't corner in road marked by an iron and stake with the following reference ties

13" W Oak	N 68-30 E	76.66 feet
15" W Oak	S 50-20W	118.0 feet
18" Twin Oak	N 23-45 E	125.3 feet

1926 County Engineer's Notebook No. 49 contains survey for CR 4 running west to east. Notes show corner marked by an iron in road intersection with ties:

Cor FP	SE	42.6
Cor FP	SW	36.7

1940's County Engineer's Notebook No. 160 contains road survey for SAR No. 4 running west to east along the section line. Corner is shown as a 2" wood hub and iron in center of 4-way road intersection. Ties:

24" Double W. Oak	NE	125.2'
18" Elm	SW	127.6'
16" R. Oak	SW	96.0'

1947 Mille lacs County Highway Department notes list ties re-rod:

PP	NW	53.4
Iron Pin Cem. Cor. Stake	SE	46.6
Guy P	SW	55.7

1971 County Surveyor's Record Book 2, page 456, notes iron and wood with the following ties:

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Page 2 of 2

PP	NW	55.33
Guy Pole	SW	55.5
Iron (Cemetery Corner)	SE	46.0

(Same ties in Notebook No. 160.)

1988 John Oliver, LS 8194, found a rebar in the centerline of a north/south and east west road.

1990 John Oliver replaced said found rebar with a cast iron monument and filed a Certificate of Location (#244631).

1993 Sidney Williamson, LS 10918, found a ½" open and replaced it with a cast iron monument and filed a Certificate of Location (#227419).

2004 County Coordinates obtained by GPS to CIM
 NAD 83 (1996 Adjustment)
 N- 138100.625
 E- 573961.500

Note: Coordinates agree well with John Oliver & Associates coordinates from traverse information.

2008 The County Surveyor's Office searched and found the location of a cast iron monument at the intersection of the centerlines of east-west bituminous road (65th Street N.E.) and north-south gravel road (195th Avenue N.E.). Position gives distances to E ¼ corner of Section 25 and the E ¼ corner of Section 36 as 2640.49 feet and 2640.53 feet respectively, which agree with Oliver's 1996 reported distances of 2640.36 feet. Surveyor accepts the position as the best evidence and set a PK nail with a Benton County Surveyor disk and updated ties.

County Coordinates to PK obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 138100.662
 E- 573961.581

STATEMENT OF EVIDENCE

Northeast Corner of Section 36, T. 37, R. 28, Benton County, Minnesota.

Northwest Corner of Section 31, T. 37, R. 27, Mille Lacs County, Minnesota.

The West line of Town 37, Range 27, was run by Deputy Surveyor Theo. Conkey in October 1849. We were unable to find any remnants of his monument or accessories for this corner.

Benton: Requested from the Co. Hwy. Dept.. None provided other than GLO notes.

Mille Lacs: The old survey record books kept in the vault at the County Highway Department show a survey by R.S. Chapman, County Surveyor, in 1909. Said survey gives distances of 2844' and 2638.5' to the east along the north line of the section. The notes state that the corner was an "iron in road" with 3 BT's as follows:

- 13" W. Oak @ N 68 30 E, 76.66 feet
- 15" W. Oak @ S 50 20 W, 118.0 feet
- 18" Dbl. W. Oak @ N 23 45 E, 125.3 feet

We found none of these BT's.

There are no other subsequent surveys that we are aware of.

During our 1989 survey for the County Highway Department for C.S.A.H. #12 we found a 1/2" rebar in the centerline - centerline intersection.

Through subsequent determination of the NE corner of this section, and analysis of the distances versus occupation lines along the project we found that our measured distances along said line compared within 1/4 foot to those by Chapman above.

Based on that analysis we accepted said found rebar as the correct perpetuation of the original government corner. We left said rebar as is.

After construction was completed, we replaced the rebar with a County cast iron monument as shown on the front hereof.

#5: /NW313727

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON
OCT 3 8 49 AM '97
ALICE G. ENGELBREYER
COUNTY RECORDER
BY *A. Engelbreyer* DEPUTY
Xm

244631

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 36, Township 37, Range 28, _____ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 8-17-93 found a 1/2" OPEN IRON
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-1-93 placed a STANDARD CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

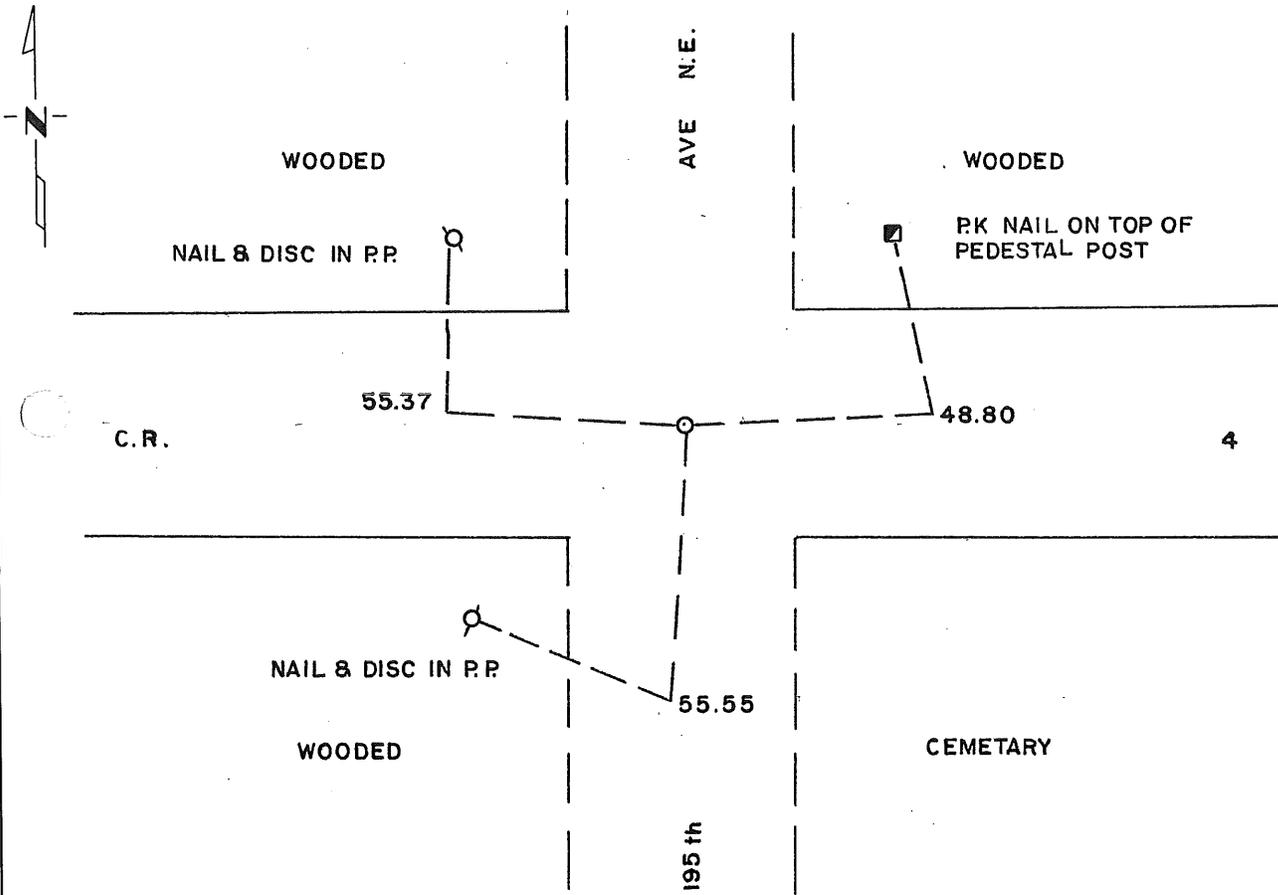

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 1/5/95
SIGNATURE DATE

Registration No. 10918

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. In 1855, the original government survey was performed.
2. On August 17, 1993, Williamson-Kotsmith, Inc. found a 1/2 inch open pipe at the intersection of the centerlines of C.S.A.H. Number 4 and a Township Road.
3. On October 1, 1993, Williamson-Kotsmith, Inc. placed a Standard Cast Iron Monument at the same location.

227419

CLERK OF
BENTON COUNTY RECORDER
BENTON COUNTY, MO
CERTIFIED TO BE FILED
AND/OR RECORDED ON

MAR 3 8 43 AM '95

ALICE G. BRIDGEMAN
COUNTY RECORDER

BY MM DEPUTY ^m