

A 356229

Certified, Filed and or Recorded on
Apr. 02, 2008 AT 10:59AM

Signed:

MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 5, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 1-25-07 found a 1/2" I.P. # 23044
DATE

left monument as found lowered monument removed monument (explain)

On _____ placed an _____
DATE

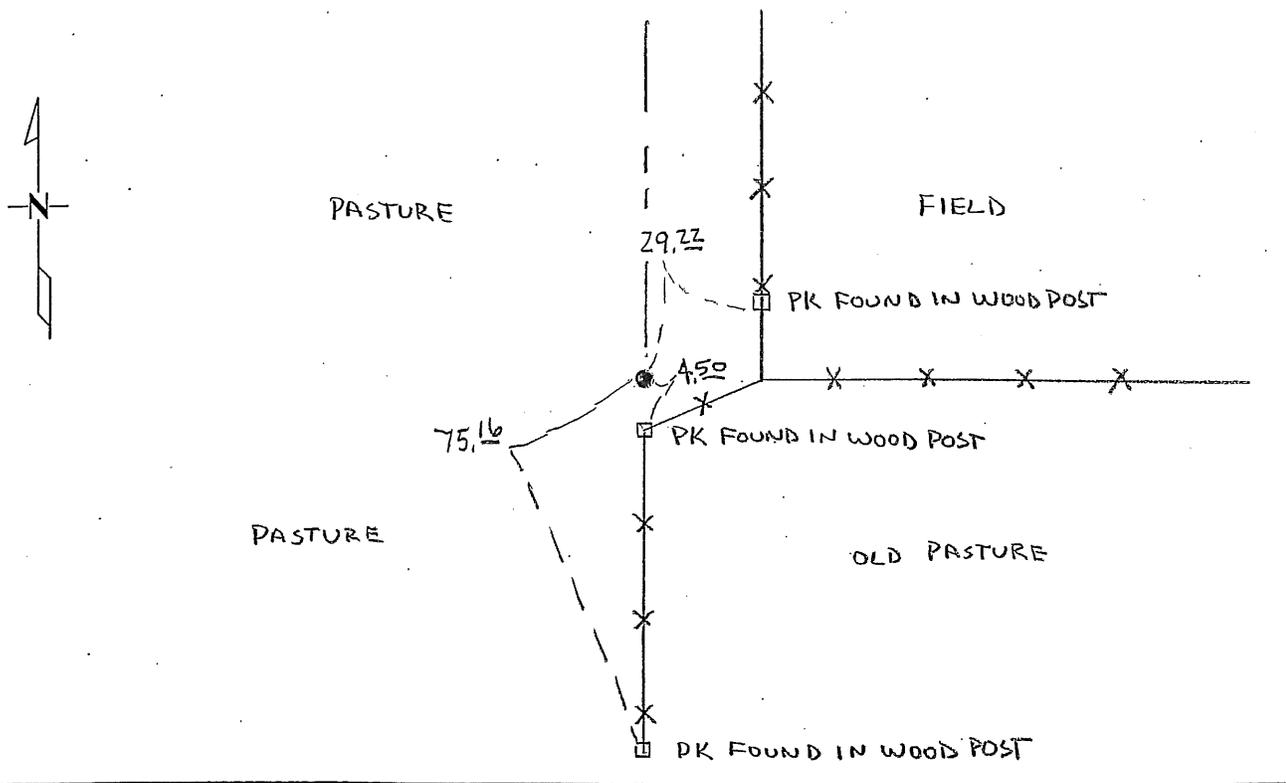

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 3-24-2008 License No. 19552

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
Jerome C. Wittstock, County Surveyor
Minnesota License No. 19552

Statement of Evidence:

L053

The East Quarter Corner of Section 5, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post at the corner location and bearing trees were recorded.

6" Blk Oak	N 15 1/2 W	23 links
6" Blk Oak	N 70 3/4 E	34 links

1957? County Surveyor's Record Book 1, page 169, notes a distance of 2652 feet to the SE corner Sec 5 (Iron) and a distance of 2800 feet to the NE Cor Sec 5 (Iron).

2007 Westwood Professional Services, Inc. found a 1/2" iron pipe capped 23044 and established reference ties. The iron pipe fit a fence line south and east.

County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N-129404.794
E-489412.423