

Certified, Filed and or Recorded on  
May 06, 2008 AT 01:22PM


Signed: JN  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 7, Township 36, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10 APR 2008 found a Cast Iron Monument  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_  
DATE

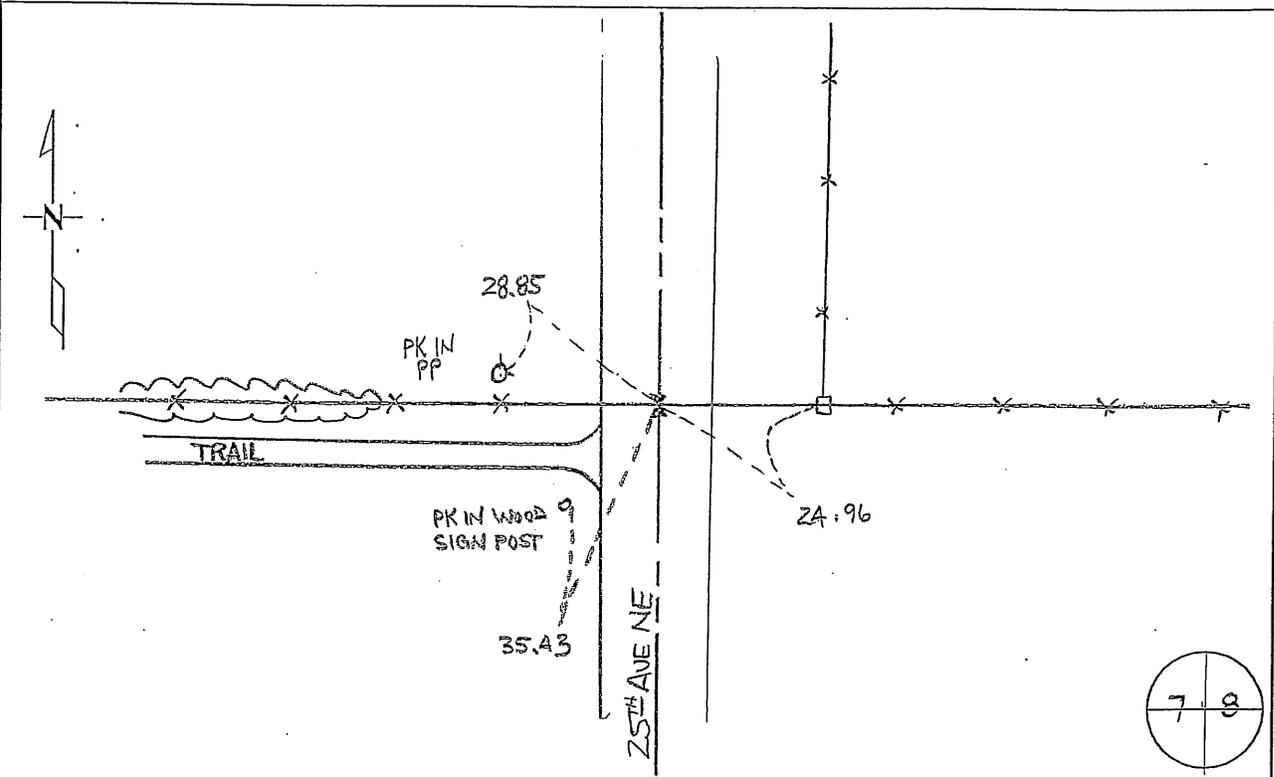

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 06 May 2008 License No. 19552  
Title:     Land Surveyor     Professional Engineer     County Surveyor     County Engineer

**Statement of Evidence:****L073**

The East Quarter Corner of Section 7, Township 36 North, Range 30 West, Minden Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey established this corner and a wood post was set for the corner and bearing trees were recorded.  
8" Blk Oak                      S 58 E                      75 links
- 1917 Survey by R.H. West notes a post at the corner and a distance of 2635 feet to the NE and SE corners of Sec 7. County Surveyor's Record Book1, page 173, notes a distance of 2635 feet to the NE and SE corners of Sec. 7. (It appears the corner was not found and reset by lost method.)
- 1962 Carley Engineering notes show a distance of 5286.66 feet between section corners with the corner being set midway and on line.
- 1990 William Lunser, LS 9394, found a spike down 1.5 feet. He set a cast iron monument at the centerline of a road and a fence line running east and west. He filed a Certificate of Location (#201531).
- 2002 Westwood Professional Services, Inc. found a broken CIM and measured 2644.45 feet south to the SE corner of Section 7. Approximate distance to the NE corner is 2642 feet.  
County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N- 124021.652  
E- 484118.210
- 2008 Westwood Professional Services, Inc. found a CIM at centerline north/south 25<sup>th</sup> Ave. NE. Established reference ties to the corner.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST Corner of Section 7, Township 36, Range 30, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 4-18-90 found a SPK DOWN 1 1/2 FEET  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 4-18-90 placed a CAST IRON MONUMENT  
DATE

## SKETCH OF REFERENCE TIES

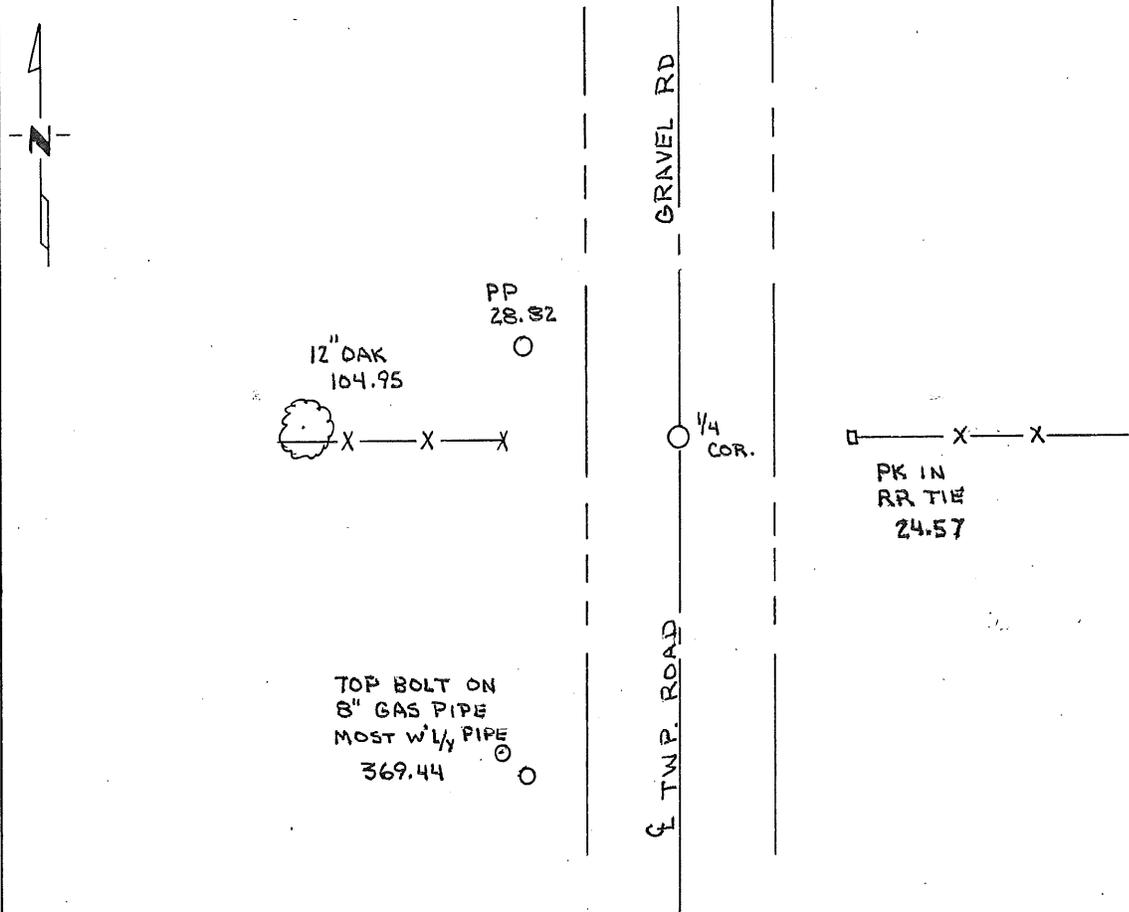

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William P. Jones 2/14/91  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

Benton County Records showed no reference to this corner other than U.S. Government Survey.

On 4-18-90 searched the area and found no evidence of an existing monument. Placed a cast iron monument at the centerline of the Township Road and fence lines to the East and West. Measurement to the NE Corner of Section 7 support this location.

201531

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

FEB 28 12 24 PM '91

ALICE C. ENGELMEYER  
COUNTY RECORDER

BY *[Signature]* DEPUTY