

Certified, Filed and or Recorded on
Sep. 22, 2009 AT 12:21PM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER
Fee Amount: \$46.00

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 14, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09-09-09 found a 3/4 inch iron pipe on centerline of 65th Ave. NE.
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

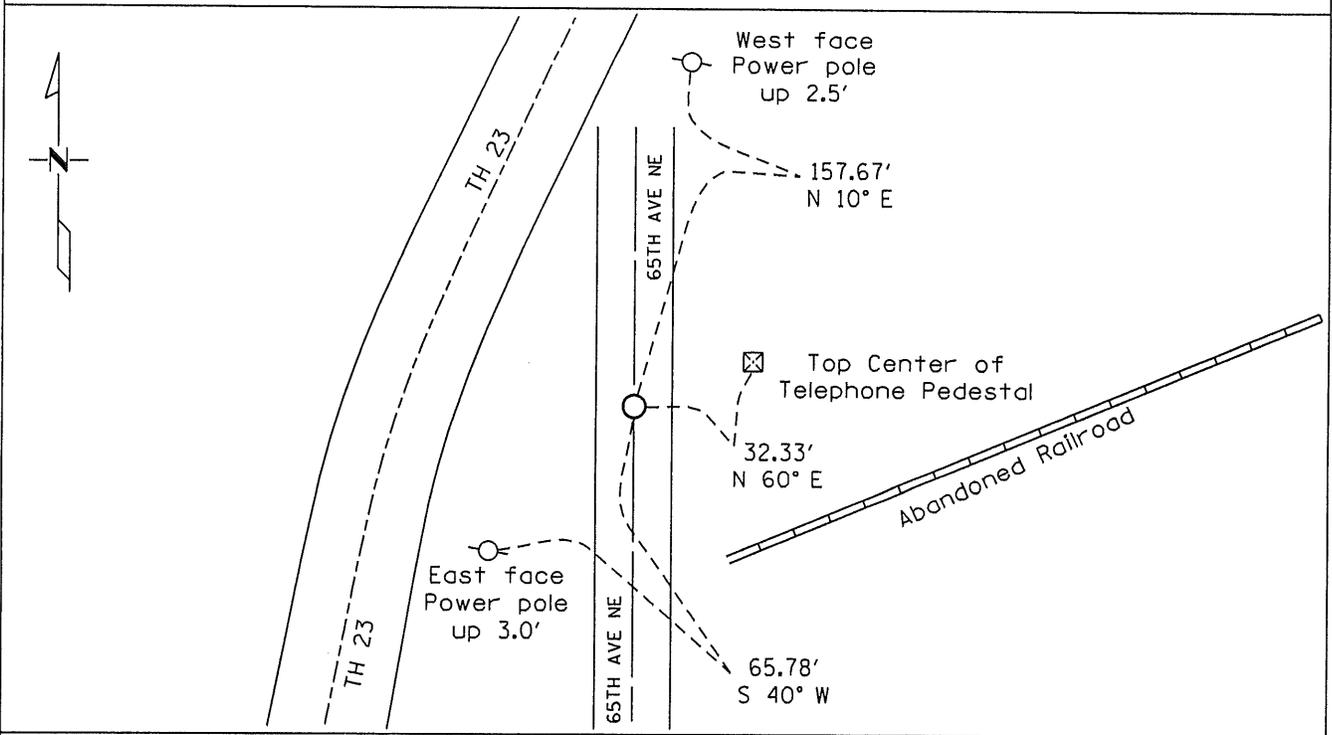

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Kevin J. Metz Date 9-10-2009 License No. 40343
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer
MNDOT

Statement of Evidence:**East Quarter Corner of Section 14, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.**

1852 Original US General Land Office survey established this corner and a wood post was set for the corner and bearing trees were recorded.

12" Aspen	S 79 E	89 links
12" Bur Oak	S 50 W	137 links

1940's The MN/DOT Highway plans, File No. 30-39 and S.P. 0503, note a 2" X 2" Hub at the intersection of a road north-south and a fence line east-west. The plans also note a distance of 2662.5 feet to the Southeast Corner of Section 14 and a distance of 2665.8 feet to the Northeast Corner of Section 14 with the following reference ties:

8" Twin Oak	W	45.3
TP	E	89.9
TP	SW	73.2

1983 Paul Wellen, LS No. 10461, used the corner and notes a distance of 2663.50 feet to the Southeast Corner of Section 14.

1999 On December 17, 1999 William Lunser found a 3/4" iron pipe at the corner and filed a Certificate of Location. Certificate of Location, Document No. 283121, notes a distance of 2661.10 feet to the Northeast Corner of Section 14 and a distance of 2661.08 feet to the Southeast Corner of Section 14.

2003 On October 10th, 2003, The Minnesota Department of Transportation found a 3/4" iron pipe and measured 2661.15 feet to the Northeast Corner of Section 14 and 2661.07 feet to the Southeast Corner of Section 14 and found the pipe to be 7.95 feet east of a straight line between section corners. No evidence of the original GLO Bearing Trees or old MN/DOT ties from the 1940's could be found. Reference ties from Certificate of Location, Document No. 283121, were checked to be correct. The Minnesota Department of Transportation in conjunction with Gary Stevenson, Benton County Surveyor, L.S. 12684, accepted the 3/4" iron pipe as the correct location of the East Quarter Corner of Section 14.

County Coordinates obtained by GPS (for reference only):
 NAD 83 (1996 Adjustment)
 N- 118543.94
 E- 505420.86


2009 On September 9th, 2009, The Minnesota Department of Transportation found a 3/4" iron pipe. Reference Ties were verified as shown on the front of this document. The Minnesota Department of Transportation accepts the 3/4" iron pipe as the correct location of the East Quarter Corner of Section 14.

For details and survey analysis, contact the Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER corner of Section 14, Township 36, Range 30, 4th P.M.
Benton County, Minnesota.

On Dec 17, 1999, a 3/4 inch iron pipe (I.P.) was found at this location.

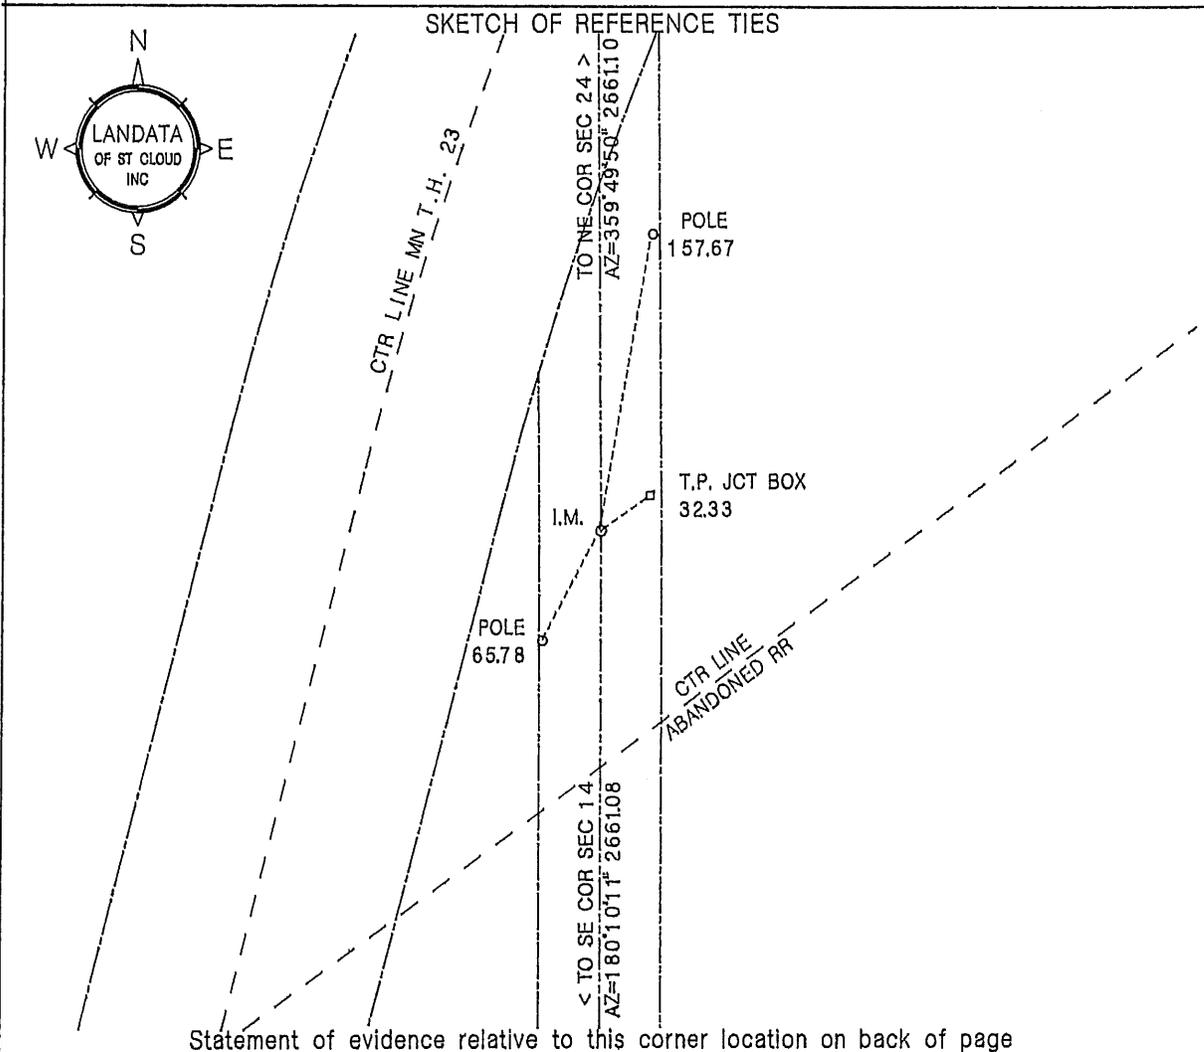

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 1-29-02
William F. Lunser, L.S. Date

Mn Reg No 9394

OFFICE OF THE COUNTY RECORDER
Benton County, Minnesota
I hereby certify that this document was filed in this office at ___ M. on the ___ day of ___, 20__.

County Recorder _____

By _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

No records were found to indicate use or remonumentation of this corner after its original placement by the U.S. Government Survey.

A 3/4 inch iron pipe of unknown origin was found on the centerline of a north-south roadway at a point midway between northeast and southeast corners of Section 14 and accepted as the best evidence of the original corner.



William F. Lunser, L.S.

283121

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

FEB 21 4 16 PM '02

MARILYN J. NOVAK
COUNTY RECORDER

BY 