

Certified, Filed and or Recorded on
May 06, 2008 AT 01:25PM


Signed: JU
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 18, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10 APR. 2008 found a Cast Iron Monument
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____
DATE

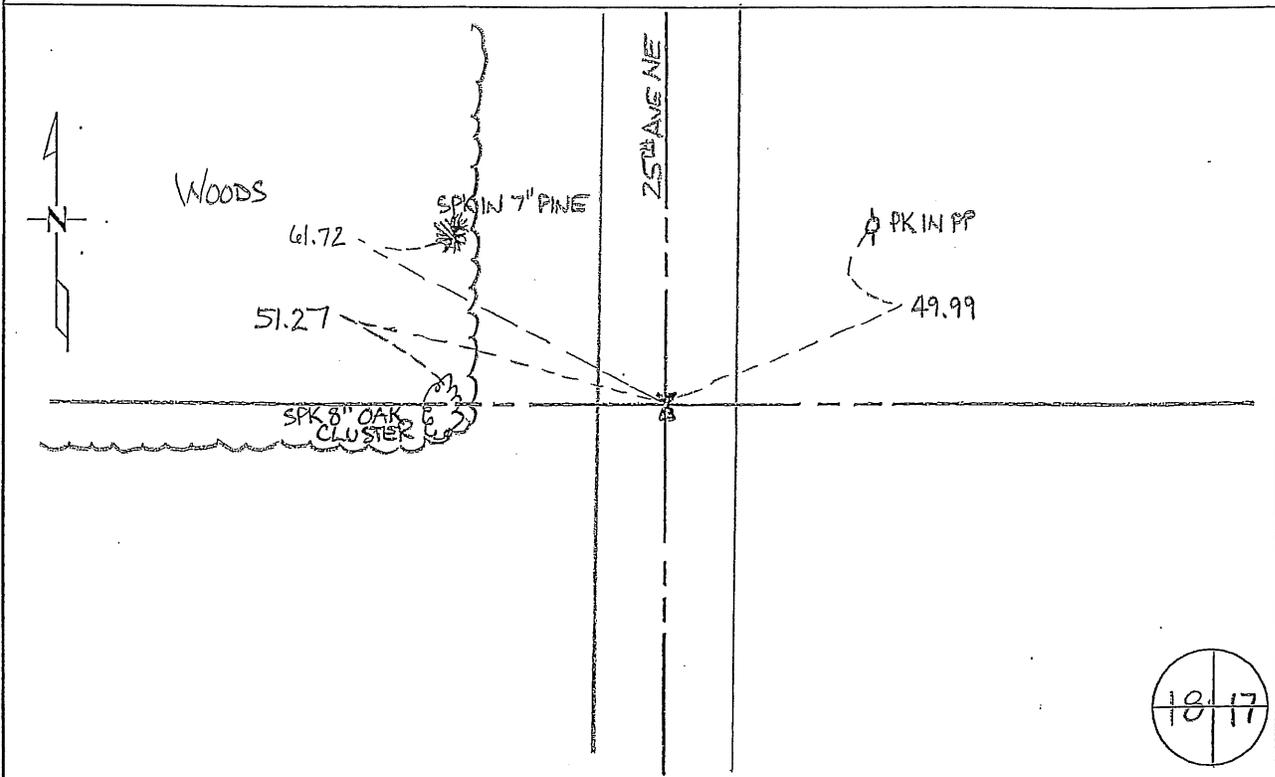

18 17

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 06 May 2008 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
Jerome C. Wittstock, County Surveyor
Minnesota License No. 19552

Statement of Evidence:

L183

East Quarter Corner of Section 18, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey established this corner and set a wood post at the corner location and bearing trees were recorded.

10" Blk Oak	S 64 E	125 links
8" Blk Oak	N 17 1/2 W	112 links

1979 Paul Wellen, LS 10461, found a 1/2" pipe in the centerline of a township road and opposite a tree line west. He replaced it with a cast iron monument and filed a Certificate of Location (#153086)

2002 Westwood Professional Services, Inc. found CIM as set by Wellen.

2003 County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N- 118743.073
E- 484147.207

2008 Westwood Professional Services, Inc. established reference ties to a found CIM.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 18, Township 36, Range 30, _____ P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 5-22-1979 found a was evidenced by 1/2 inch iron pipe in the center line of a township road opposite a tree line to the West

left monument as found, lowered monument, removed monument (explain)

On _____ placed a permanent marker consisting of Benton County Cast Iron Monument

SKETCH OF REFERENCE TIES

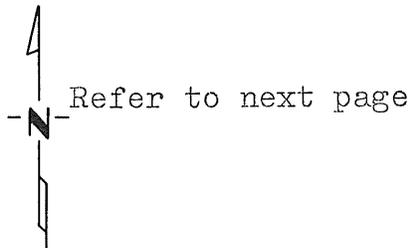

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Wellen
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 10 A: .M. on the 13 day of July A.D., 19 79
County Recorder F. A. Johnson
~~Register of Deeds~~


By _____, Deputy

DOCUMENT NO. 153086

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 22nd day of 11th May, 19 79
I did find the East Quarter corner of Section 18,
Twp. 36, Rg. 30, Benton County, Minnesota, which
was evidenced by 1/2 inch iron pipe in the center line of a township road
opposite a tree line to the west

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of Benton County Cast Iron Monument and that
I did establish witness or reference monuments as shown below:

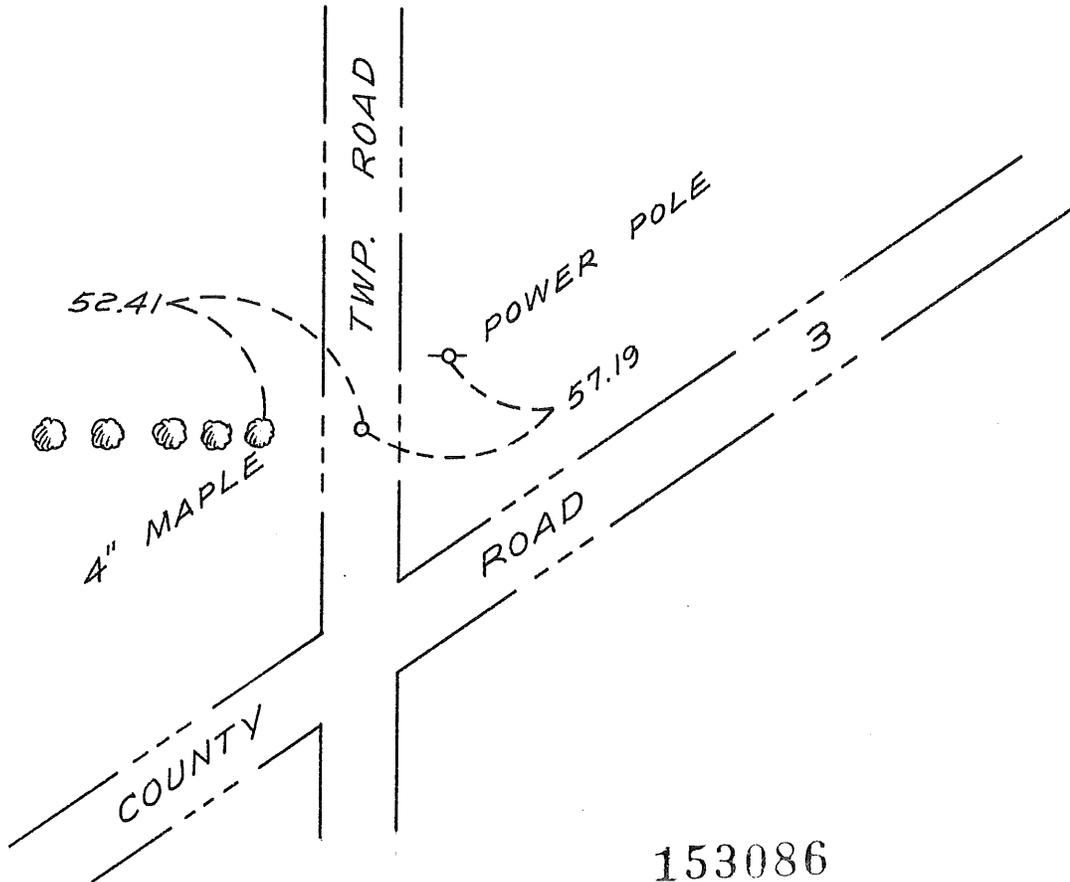

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

David J. Miller

Minn. Registration No. 10461

153086

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
13th day of July, 19 79.
at 10 A.M.

F. A. Johnson
County Recorder

By _____ Deputy.