

Certified, Filed and or Recorded on
Aug. 24, 2009 AT 08:15AM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 27, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 01 Apr. 2008 found a Cast Iron Monument
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____
DATE

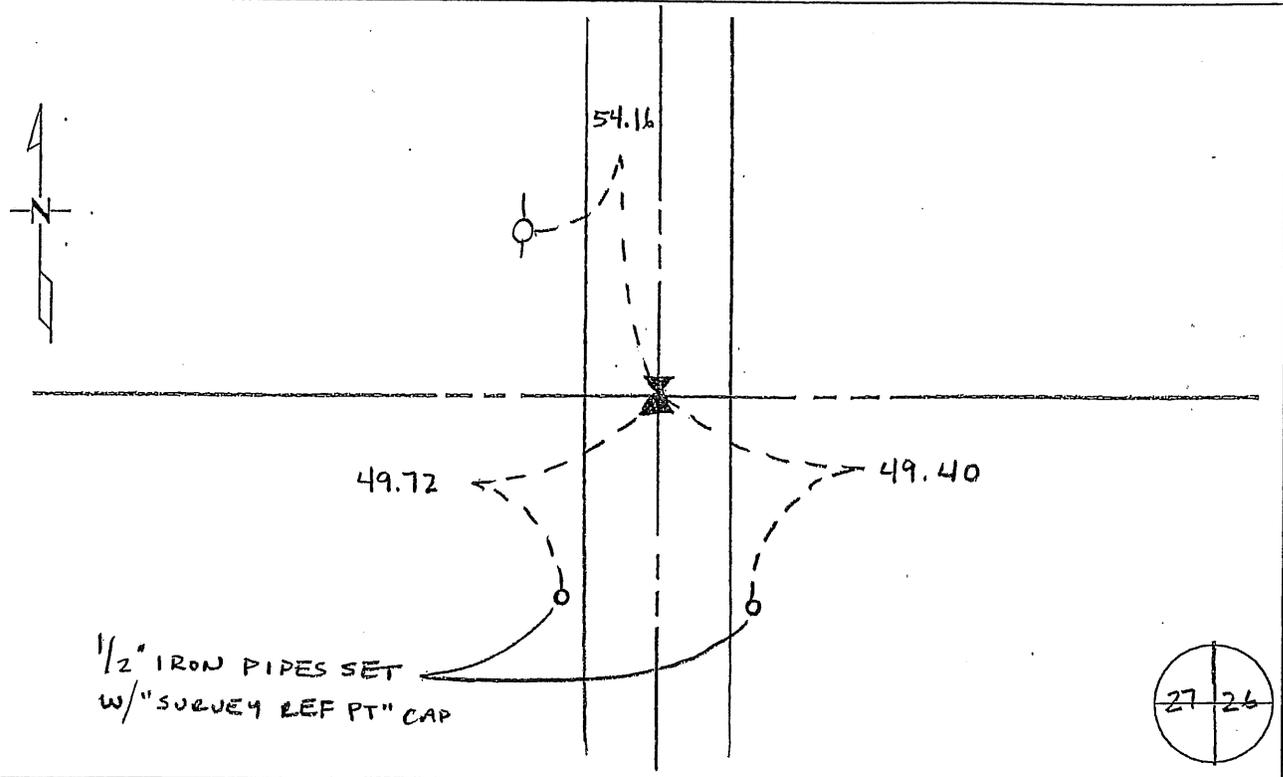

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 20 August 2009 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

L273

East Quarter Corner of Section 27, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|------------|-----------|
| 8" Bur Oak | N 11 E | 185 links |
| 8" Bur Oak | S 89 1/2 W | 194 links |
- 1984 Paul Wellen, LS 10461, set a 3/4" iron at the corner location on line between section corners and in line with tree line west. He filed a Certificate of Location (#173395).
- 1992 James Nielsen, LS 11865, found Wellen's pipe and a spike 41.5 ft south of Wellen's pipe. The spike was found to be 2.77 feet west of the lost position. He reviewed his findings concerning lines of occupation with Mr. Wellen and it was agreed that the correct location was the found spike. On July 21, 1992 James Nielson set a cast iron monument at the spike location. He filed a Certificate of Location (#216764). MN/DOT Right of Way Plat No. 5-9 shows a cast iron monument at the corner.
 County Coordinates from MN/DOT:
 NAD 83 (1986 Adjustment)
 N-108043.784
 E-500273.840
- 2003 Westwood Professional Services, Inc. found a CIM, which fit with the 1992 position being 2.52 west of the lost position measuring 2673.74 feet to the NE corner and 2673.68 feet to the SE corner of Section 27.
 County Coordinates obtained by GPS to CIM
 NAD 83 (1996 Adjustment)
 N- 108044.192
 E- 500273.576
- 2008 Westwood Professional Services, Inc. found a CIM, which fit with the 1992 position being 2.52 west of the lost position measuring 2673.74 feet to the NE corner and 2673.68 feet to the SE corner of Section 27. Established new reference ties and verified the 2003 coordinates.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 27, Township 36N, Range 30W, 4th P.M.
STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 04/23/92 found a spike (down 0.4')
DATE

left monument as found, lowered monument, removed monument (explain)

On 07/21/92 placed a Mn/DOT cast iron monument
DATE

SKETCH OF REFERENCE TIES

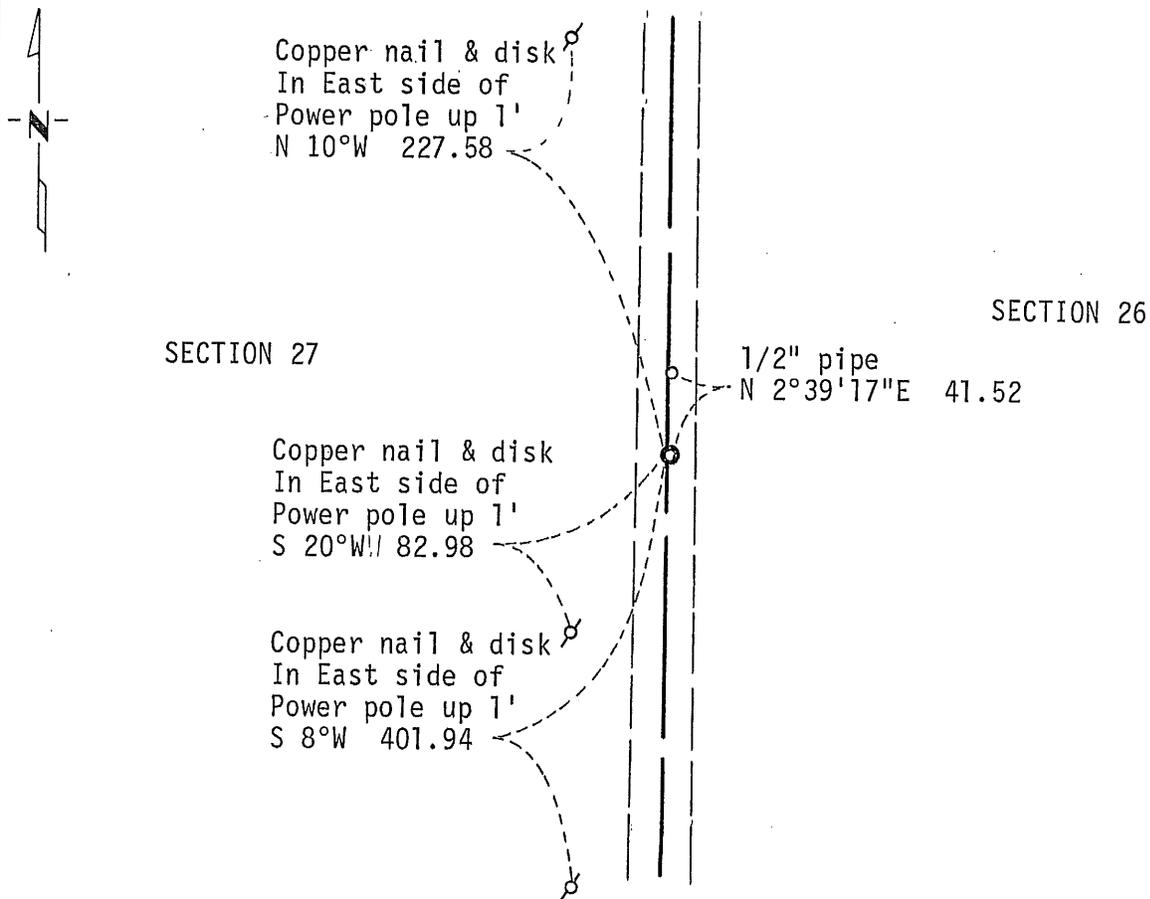

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 1/7/1993
SIGNATURE DATE

Registration No. 11865

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence: EAST QUARTER CORNER SECTION 27, TOWNSHIP 36 NORTH,
RANGE 30 WEST

In 1852 the original public land survey was run and a wood post was set to mark the corner.

In 1984 Mr. Paul Willan, registered land surveyor, searched for the corner and found no evidence. Mr. Willan set a 3/4" pipe for the corner on a straight line between the Northeast Corner and Southeast Corner of Section 27 and at a tree line to the west and filed a certificate of location.

In 1992 Mn/DOT searched for evidence of the corner. Mr. Willan's pipe was found and an old spike (down 0.4') was found in the center of the road 41.5 feet south of Mr. Willan's pipe. The spike is 2.77 feet west of a lost location. Mn/DOT investigated the tree line occupation and found an old fence line that, if extended, would intersect the east line of the section 21.5 feet south of Mr. Wellan's pipe. This same fence line is 82 feet south of the true center section location. Also the occupation line at the East 1/16 of the SE $\frac{1}{4}$, when doubled over, falls approximately 50 feet south of Mr. Wellan's pipe or 8 feet south of the spike location.

Mn/DOT reviewed this information with Mr. Wellan and agreed that the correct location for the corner is at the spike. On 07/21/92 a cast iron monument was set at the spike location.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Baxter, MN.

216764

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

AUG 3 4 08 PM '93

ALICE O. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/4 Corner of Section 27, Township 36, Range 30, _____ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



Filed under West 1/4 Corner Section 26, T36 R30

Certificate #173395

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE DATE

Registration No. _____

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ____

Register of Deeds _____

By _____, Deputy


DOCUMENT NO. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 6 day of JUNE, 1984
I did SET the WEST 1/4 corner of Section 26,
Twp. 36, Rg. 30, Benton County, Minnesota, which
was evidenced by _____

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of 3/4" iron and that
I did establish witness or reference monuments as shown below:

00100
100 feet
6-36-30
16.12
3.25
100

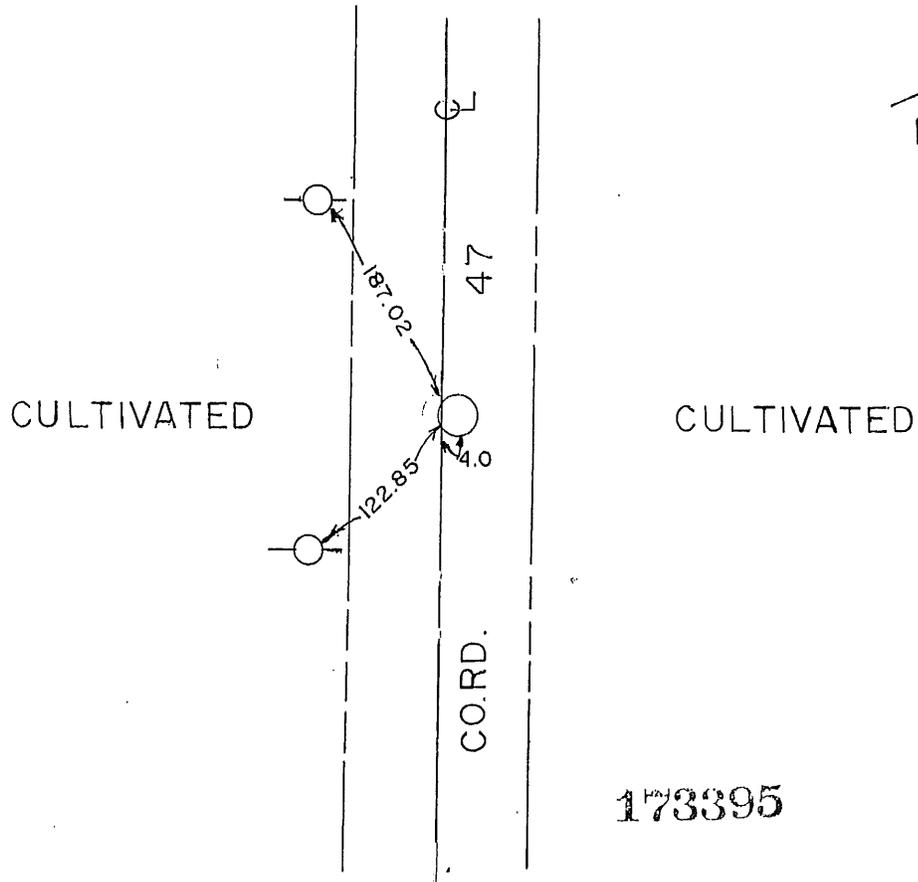

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

Doug Allen

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
13th day of May, 1985
at 11:00 A.M.

Alice C. Engelmeier
County Recorder

By _____ Deputy.