

Certified, Filed and or Recorded on
Aug. 24, 2009 AT 08:16AM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 29, Township 36, Range 3D
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 01 APRIL 08 found a PK NAIL
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

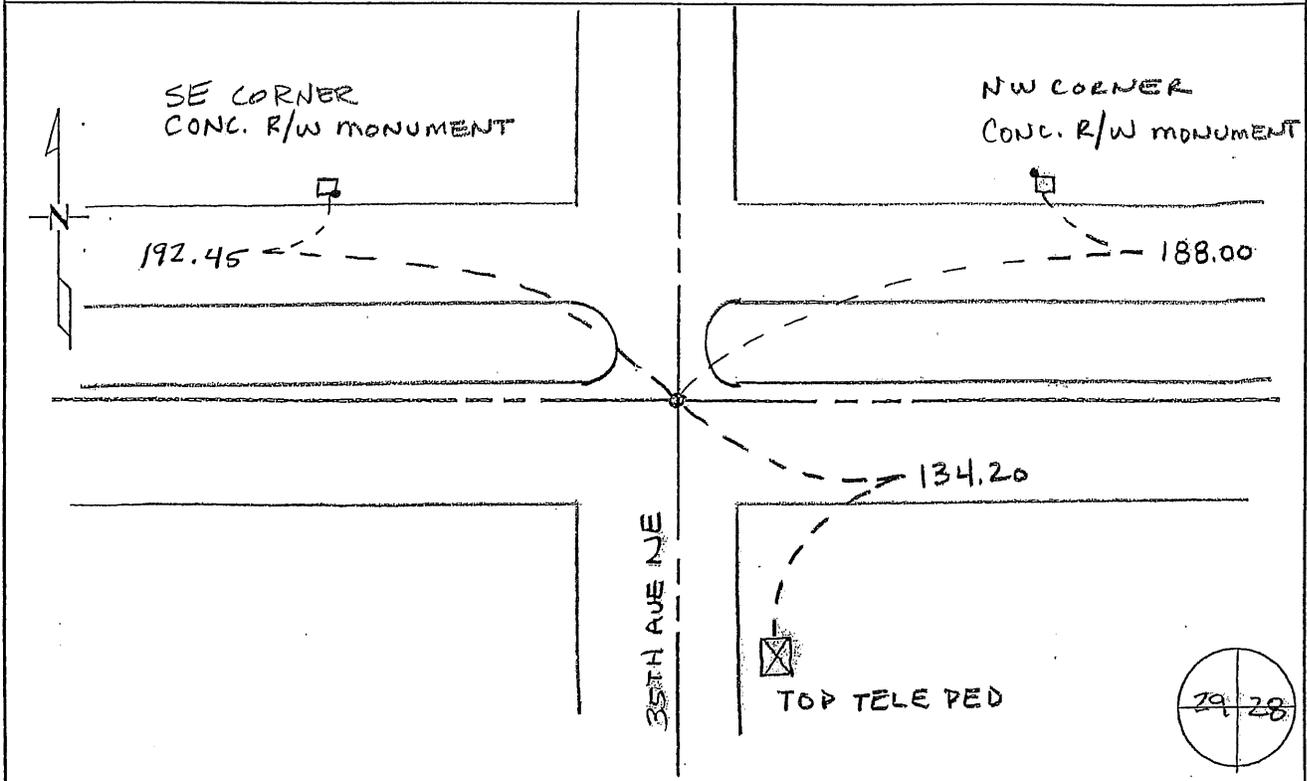

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 20 August 2009 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

L293

East Quarter Corner of Section 29, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded

14" Bur Oak N 28 E 647 links

This corner is noted on the following recorded plats

<i>BRENNAN'S ADDITION</i>	8/28/1951	M.B. Lang
<i>CERTIFICATE OF SURVEY FOR A.J. RUDOLPH</i>	7/14/1988	Bruce Skipton

1938 County Engineer's Notebook No. 110 contains survey of north-south, but no corner is mentioned.

1947 Roll O-09, of the MN/DOT Highway plans, File No. 30-39 and S.P. 0503, show the corner is at the intersection of roads east/west/south/north. It also notes a distance of 62.4 feet south to the centerline.

1972 William Lunser, LS 9394, found a RR spike in the bituminous, which was substantiated by a RR spike at the 1/16 on the East line of the SE1/4. He filed a Certificate of Location (#133430) and notes a distance of 2619.95 feet to the SE corner Sec 29 and a distance of 62 feet to the centerline of MN TH23.

1984 Doc. No. 191258, by William Lunser notes a distance of 2709.42 feet to the NE corner Sec 29.

1992 James Nielsen, LS 11865, found a cast iron monument and all of Lunser's ties. He filed a Certificate of Location (#216768)
 County Coordinates obtained from MN/DOT
 NAD 83 (1986 Adjustment)
 N- 108008.806
 E- 489624.201

1993 and 1994 MN/DOT Road Alignment Roll N-15 and the following road plats 05-4, 05-5, 5-06, 5-7, 5-14, 5-15 note a Benton County CIM at the corner.

2007 CIM was not found. Westwood positioned the corner from information on Right of Way Plat 5-15. Overall mile fit shown information.

County Coordinates as derived from Right of Way information
 NAD 83 (1996 Adjustment)
 N-108009.483
 E-489623.831

2008 Westwood Professional Services, Inc. found a PK nail. Established reference ties to corner and verified 2007 coordinates.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER _____ Corner of Section 29, Township 36N, Range 30W, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 04/22/92 found a Benton County cast iron monument.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

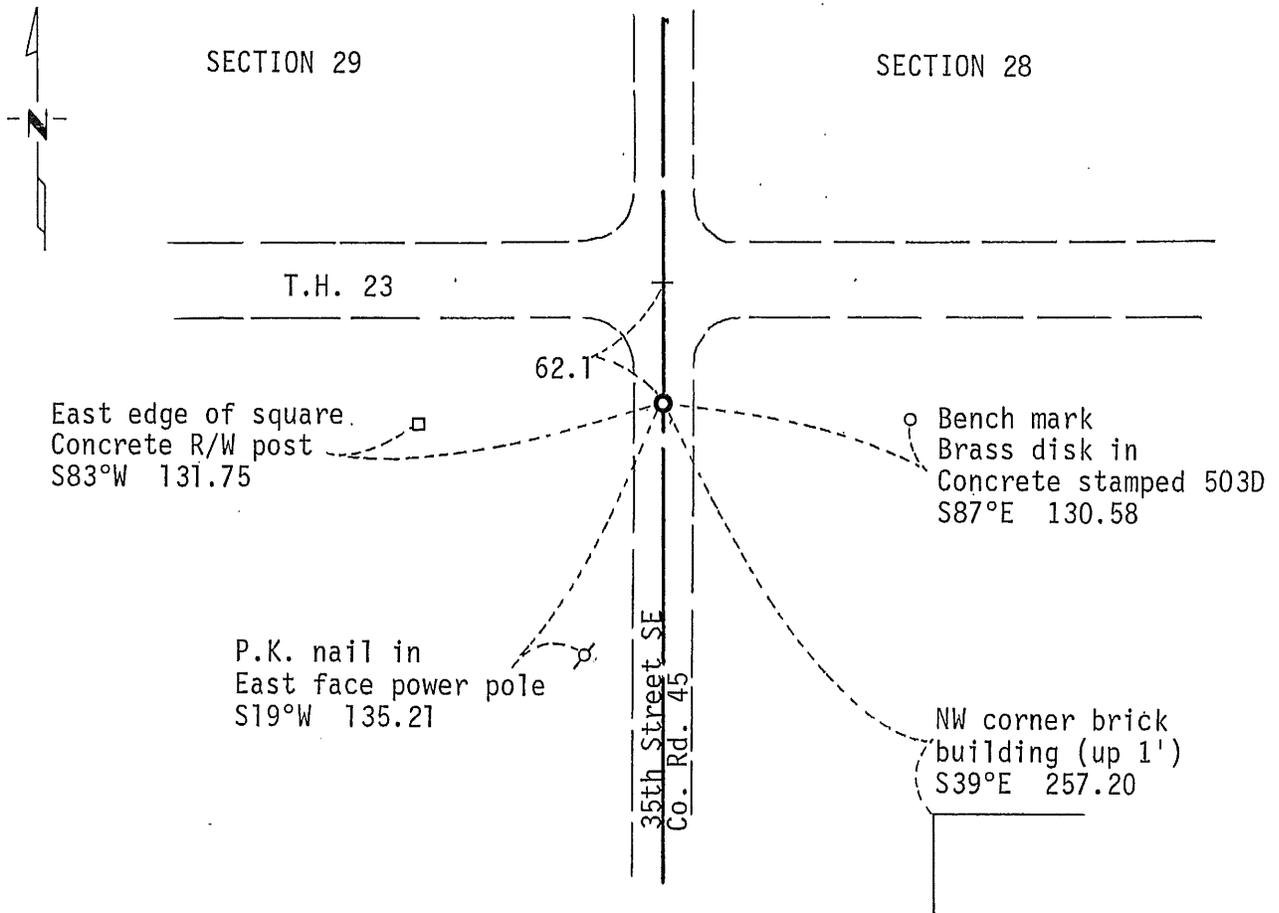

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 1/7/1993
SIGNATURE DATE

Registration No. 11865

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER SECTION 29, TOWNSHIP 36 NORTH
RANGE 30 WEST

Reference: Certificate of Location Document #133430 filed 02/09/1973 by
Williami Lunser.

The 1947 Highway Department right of way map calls for the corner at the
intersection of roads north-south-east-west, but does not indicate a
monument at the corner. This location was 62.10 feet south of present
TH 23 station 158+49.60.

On 04/22/1992, Mn/DOT recovered a Benton County cast iron monument at
the corner and all of Mr. Lunser's reference ties. The found monument is
in agreement with the location shown on Mn/DOT's 1947 R/W map and is
accepted by Mn/DOT as the correct location for the corner.

For details and survey analysis contact the Minnesota Department of
Transportation Surveys Office at Baxter, MN.

2 1 6 7 6 8

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND FOR RECORDED ON

AUG 3 4 08 PM '93

ALICE G. BRAZILMEYER
COUNTY RECORDER

BY  DEPUTY

