

Certified, Filed and or Recorded on
Feb. 12, 2010 AT 12:47PM


Signed: JM
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 36, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 25 MAR 08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

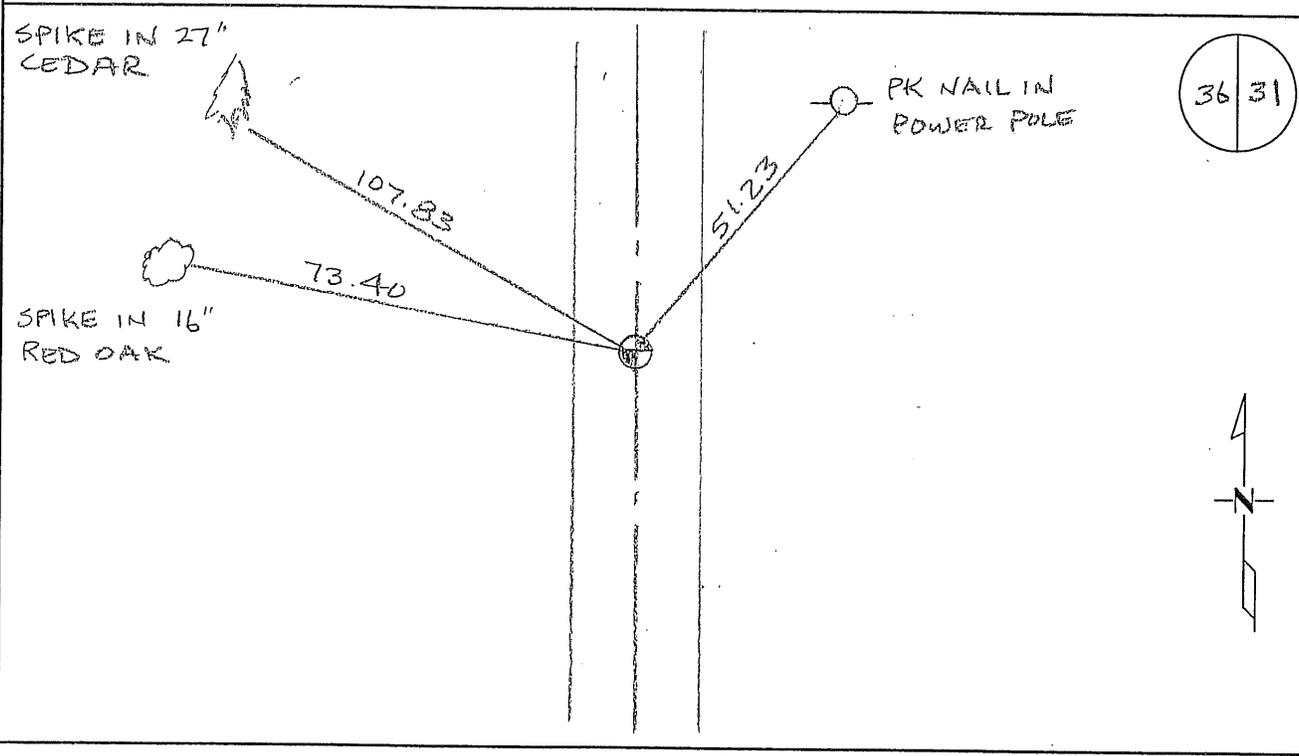

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstach
Benton County Surveyor
License No. 19552

Date: 02/05/2010

Benton County Surveyor's Office
 Jerome C. Wittstock County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**L363**

The East Quarter Corner of Section 36, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

6" Bur Oak	S 67 W	148 links
4" Bur Oak	S 16 E	54 links

1930 County Engineer's Notebook No. 60 and County Surveyor's Record Book 1, page 231, notes an iron with the following reference ties:

12" Poplar	SW	36.0
10" Boxelder	W	46.5

Other undated ties.

Cor F.P. E	21.6
F.P.	SE 31.0

Notes show fence line east and stationing gives distances of 2661.0 feet to the SE corner and 2665.0 feet to the NE corner with a delta angle of 0-10' left (running south to north).

1930 County Engineer's Notebook No. 79 contains surveys by H. G. Elletson. Notes give a distance of 5326.5 feet for the east line with ¼ corner set midway and marked by an iron monument with ties same as above. Set 1/16th corner south marked by an iron pipe,

Pre 1940 MN/DOT notes by C. H. West for TH 95 show corner as ½ " iron pin in place at intersection of north-south road and fence line east. Ties:

12" Poplar NW	72.8'
8" box Elder	NW 46.7'
Cor FP	E 28.0'

Stationing gives distance of 2662.6 feet to the SE corner.

1992 Paul Wellen, LS 10461, found a 1" X 1" square iron at the intersection of a road (running north and south) and a fence line (running east and west. Replaced with a cast iron monument. A Certificate of Location (#216301) was recorded.

1996 Wellen measured 2662.20 feet to the SE corner and 2664.96 feet to the NE corner of Section 36.

2000 Bogart & Pederson measured 2661.94 feet to the SE corner and 2665.08 feet to the NE corner of Section 36.

2004 Found CIM and 24" oak stump SW at 102 feet that possibly could be from original GLO BT. County Coordinates obtained by GPS to CIM:
 NAD83 (1996 Adjustment)
 N - 102694.234
 E - 510993.724

2008 Westwood professional Services, Inc. found the CIM. Distances north and south are 2665.13 and 2661.97 respectively, fitting the 1930, pre-1940, 1996 and 2000 distances well. The position is accepted as marking the obliterated corner location. Reference ties were established and the 2004 coordinates were verified.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 36, Township 36, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 7-21-92 found a Square 1" X 1" Iron
DATE

left monument as found, lowered monument, removed monument (explain)

On 7-21-92 placed a Cast Iron Monument (Flush)
DATE

SKETCH OF REFERENCE TIES

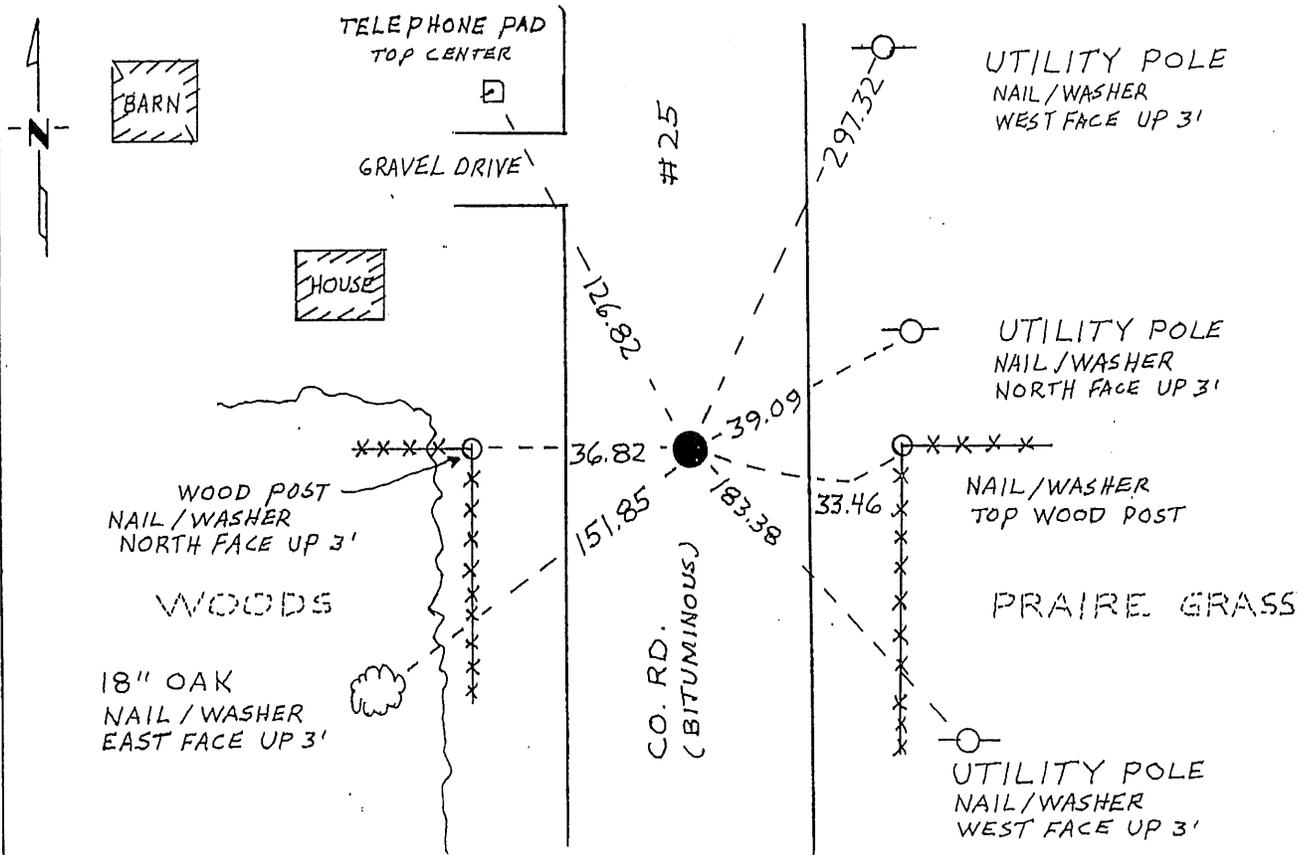

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Don Miller
SIGNATURE DATE 2-16-93

Registration No. 10461

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER, SECTION 36, T 36N, R 30W, 4TH P.M.

1. During the G.L.O. survey of 1849, Mr. Theodore Condey, a U.S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyor's books provided that there is an Iron Monument at said corner.
3. On July 21, 1993, Paul E. Wellen & Associates searched and found Iron Monument at center line of County Road #25 and East-West fence line. We accepted this Iron Monument as evidence of the location of said corner. On July 21, 1992, we set a Cast Iron Monument in place of Iron Monument. Also established new reference ties as indicated.

216301

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUL 14 1 24 PM '93

ALICE G. ENGLISH
COUNTY RECORDER

BY *ju* DEPUTY

