

Certified, Filed and or Recorded on
Feb. 12, 2010 AT 12:58PM


Signed: M
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 1, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8/27/09 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On 8/27/09 placed an PK NAIL WITH BENTON COUNTY SURVEYOR
DISK OVER EXISTING MONUMENT

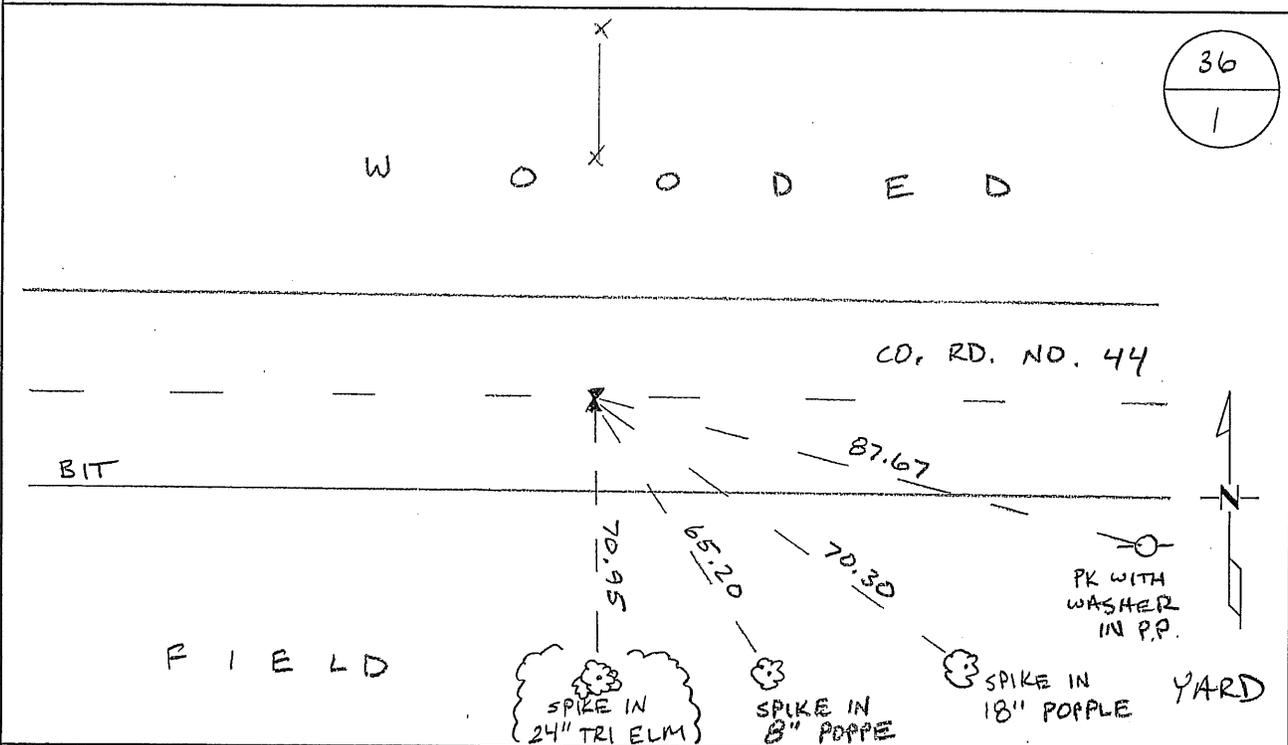

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 02/12/2010

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

L011

The North Quarter Corner of Section 1, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

10" Elm	N 12 E	9 links
6" Ironwood	S 20 W	17 links

1939 County Engineer's Notebook No. 127 contains survey of CAR 29 running west to east on section line. Corner is shown as a spike set in center of road in line with fence north. Ties:

Cor. FP	S	37.5'
FP	SE	46.2'

Stationing gives distances of 2700.0 feet to the NE corner and 2669.9 feet to the NW corner with a delta angle of 0-48' left.

2002 No resurvey information was found on this corner in the Benton County Surveyor's records.

2004 Westwood Professional Services found a CIM and measured 2697.51 feet to the NE corner and 2672.42 feet to the NW corner.

County Coordinates Obtained by GPS to CIM
 NAD 83 (1996 Adjustment)
 N- 132140.762
 E- 507885.405

2009 Westwood Professional Services, Inc. found a CIM in the same coordinate position that was reported in 2004. The CIM is located in the center of Co. Rd. 44 on a fence line to the north and recessed below the bituminous surface. A PK nail with Benton County disk was placed over the CIM and reference ties were established.