

A 356228

Certified, Filed and or Recorded on
Apr. 02, 2008 AT 10:59AM

Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/4 Corner of Section 5, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 1-25-07 found a 1/2" I.P. # 12236
DATE

left monument as found lowered monument removed monument (explain)

On _____ placed on _____
DATE

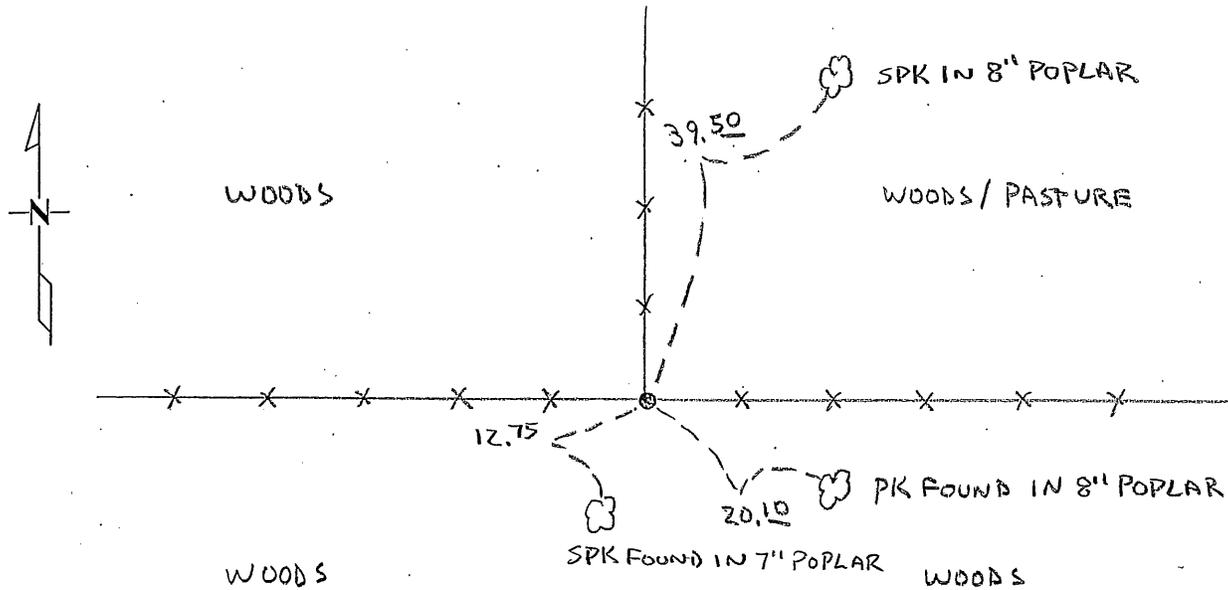

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Wittstock Date 3-24-2008 License No. 19552

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

L051

The North Quarter Corner of Section 5, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post in a mound.
- 2002 No resurvey information was found on this corner in the Benton County records. However, County Surveyor's Record Book 1, page 169, gives a distance of 5448.00 feet along the north line of Section 5, believed to be from M.W. Carley in 1957.
- 2006 Bogart, Pederson and Associates set a 1/2" iron pipe capped 12236 at a fence corner and notes a distance of 2696.66 feet to the Northwest Corner of Section 5 and a distance of 2734.28 feet to the Northeast Corner of Section 5
- 2007 Westwood Professional Services, Inc. found a 1/2" iron pipe capped RLS 12236 and established reference ties as shown. No additional corner evidence was found.

County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N-132189.088
E-486540.465