

4-19

A 356661

Certified, Filed and or Recorded on
Apr. 18, 2008 AT 12:23PM


Signed: OK
MARILYN J NOVAK B V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 19, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On DATE MAY 07 found a 1/2" OPEN IRON PIPE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

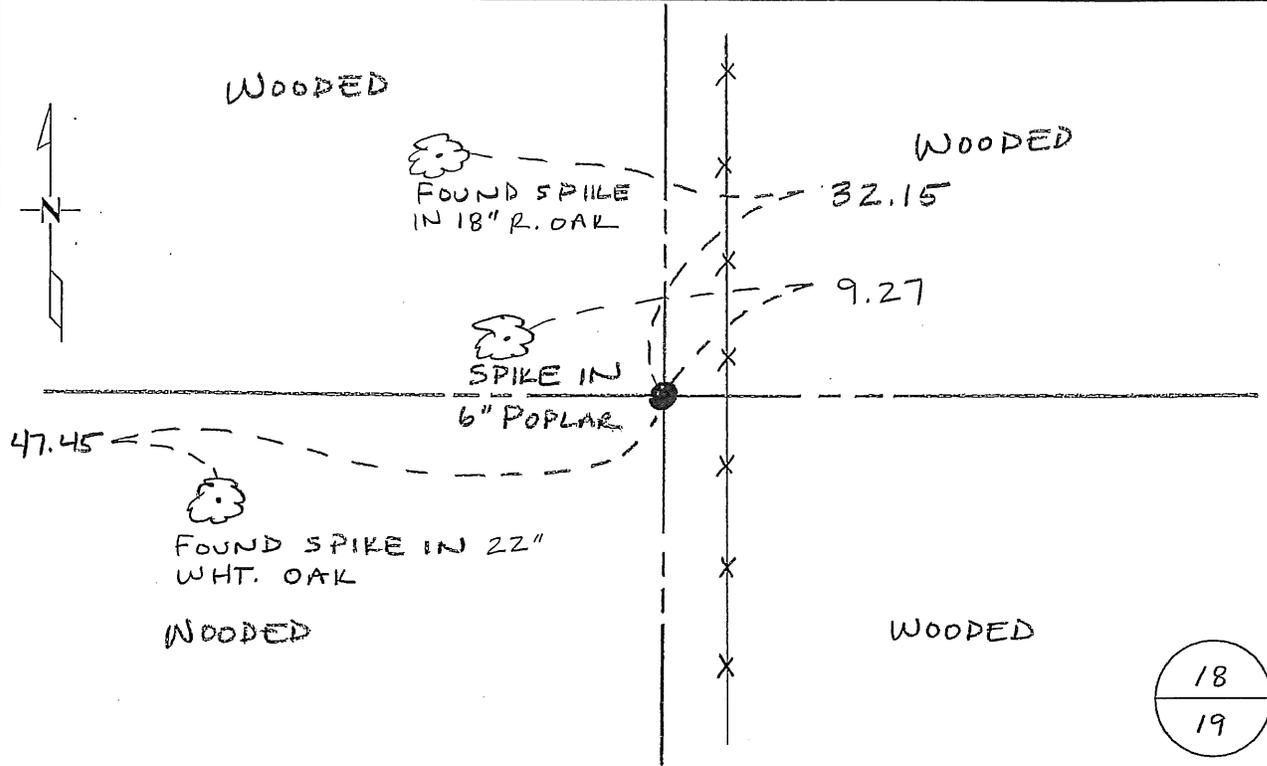

18
19

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C Wittstock Date: 16 April 2008 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
Jerome C. Wittstock, County Surveyor
Minnesota License No. 19552

Statement of Evidence:

L191

The North Quarter Corner of Section 19, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at the corner location and bearing trees were recorded.
5" Blk Oak N 56 W 386 links
- 1980 Paul Wellen, LS 10461, set an iron monument for the corner. Information does not show how corner was set.
- 1995 Kevin Festler, LS 22702, found a 1/2" pipe and left it as found. Pipe is on north side of corner fence post with fence lines running east, west, and south. He filed a Certificate of Location (#230321).
- 2002 Westwood Professional Services, Inc. found a 1/2" iron pipe.
County Coordinates obtained by Side tie
NAD 83 (1996 Adjustment)
N- 116006.262
E- 481590.014
- 2008 Westwood Professional Services, Inc. found a 1/2" open iron pipe and established new reference ties

County Coordinates obtained by Side tie
NAD 83 (1996 Adjustment)
N- 116006.561
E- 481589.624


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 19, Township 36, Range 30, 4th P.M.
 STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 2-13-95 found a 1/2 inch iron pipe
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

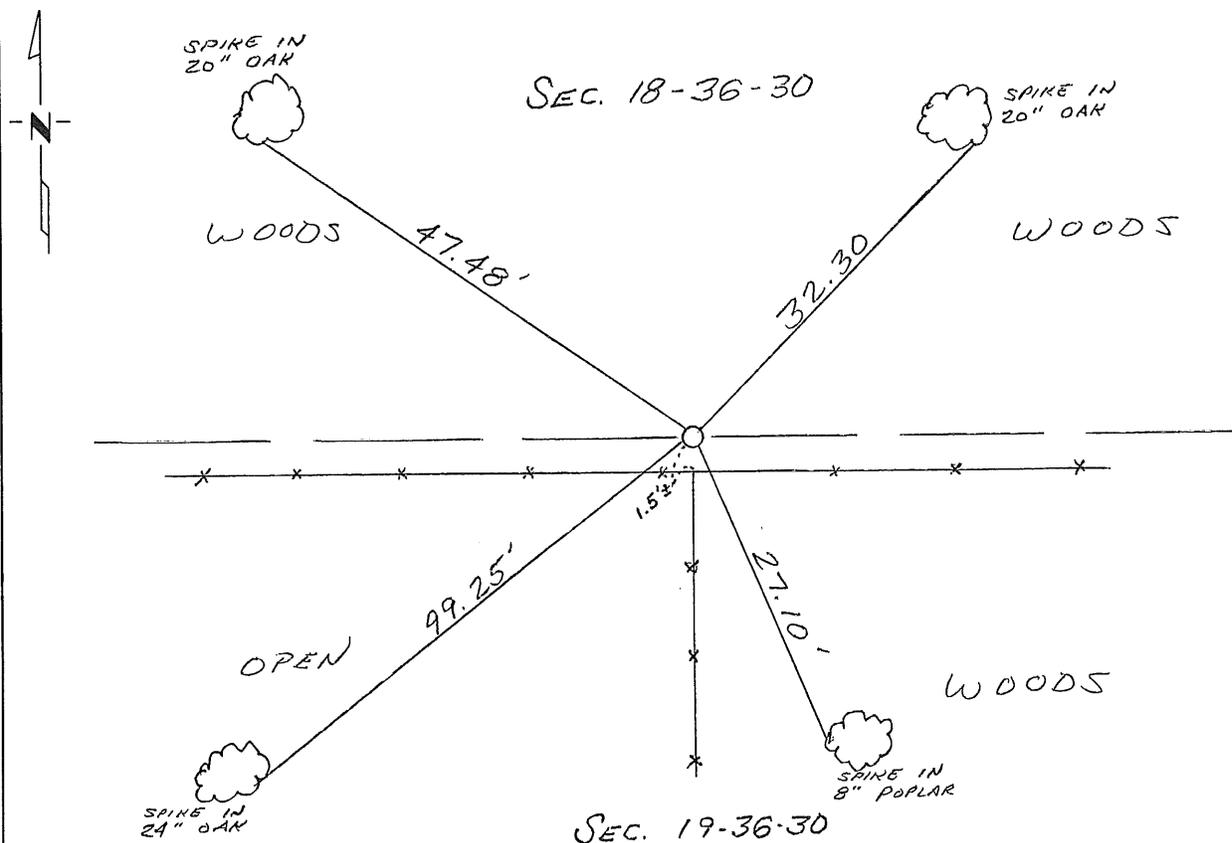

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 8/17/1995
SIGNATURE DATE

Registration No. 22702
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 ____

County Recorder _____
 By _____, Deputy
 DOCUMENT NO. _____

Statement of Evidence:

The north quarter corner of Section 19, Township 36, Range 30, 4th Principal Meridian, Benton County, Minnesota, was set under the Public Land Survey as a post with bearing trees. No trace of post or trees now exists.

A search by Benton Co. Highway personnel of available county survey records revealed no additional information on this corner.

In 1995, Comstock & Davis, Inc. while remonumenting section corners for the purpose of G.P.S. work for Benton County found a 1/2 inch iron pipe at the north quarter corner position of Section 19, Twp. 36, Rng. 30. Comstock & Davis, Inc. compared the location of the 1/2 inch iron pipe to the original U.S. Government Survey and found the position to be within reason of the Public Land Survey records. Comstock & Davis, Inc. accepted the 1/2 inch iron pipe monument as the position for the north quarter corner of Section 19. Refer to Job No. 945017.

230321

CLERK OF DISTRICT COURT
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE TRUE
AND ACCURATE

AUG 31 12 53 PM '95

ALICE J. ...
COUNTY ...

BY Mm ...