


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 25, Township 36, Range 30, 4th P.M.
 STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 07/07/1997 found a Benton County cast iron monument with concrete
DATE
monument directly below
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

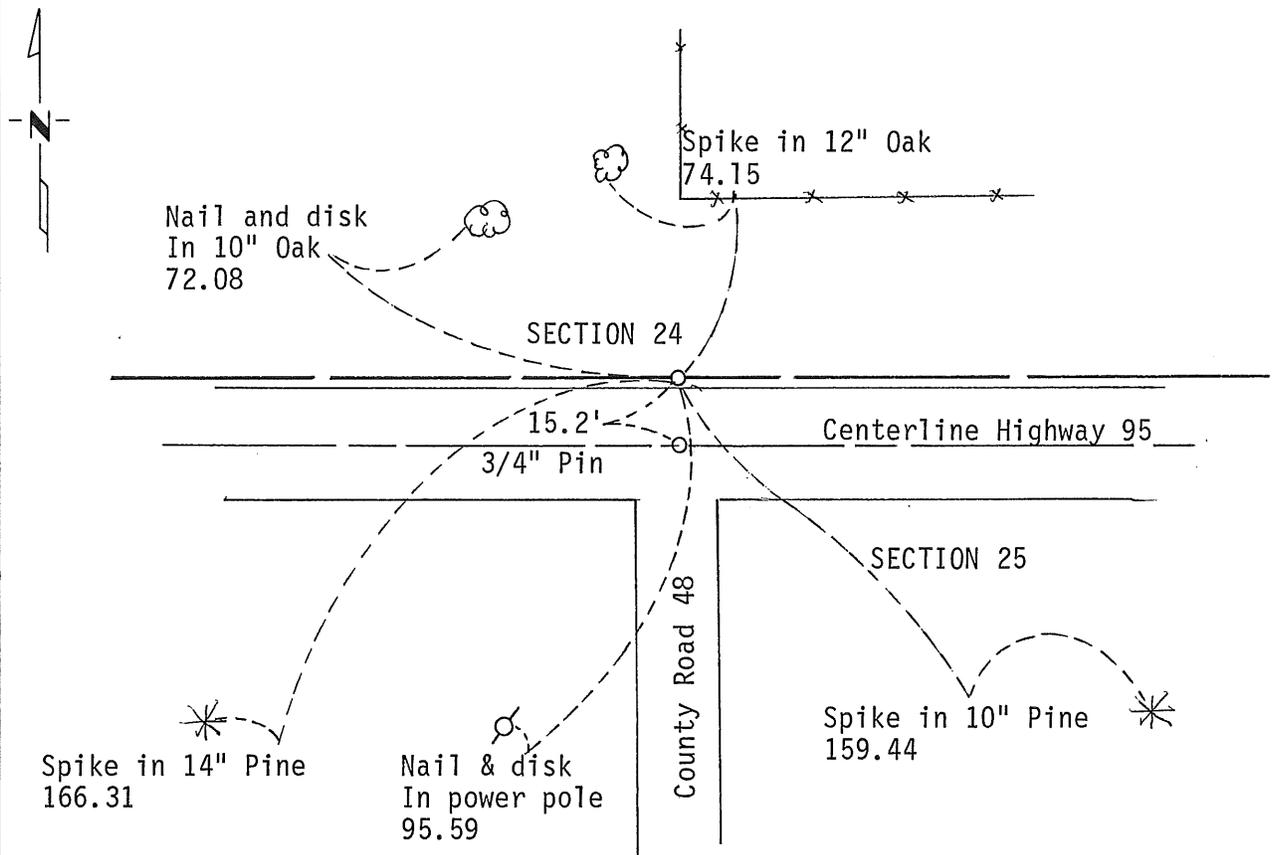

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 4/12/99
SIGNATURE DATE

Registration No. 11865
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 25, TOWNSHIP 36 NORTH,
RANGE 30 WEST, BENTON COUNTY, MINNESOTA

The original public land survey was run in 1855 and a wood post was set to mark the corner.

In 1942, the Minnesota Highway Department notes (Book #89, pages 1-26) call for a 60d spike in place at the corner at the intersection of roads east-west and south and a fence north. The spike was replaced with a two-inch by two-inch hub and three reference ties were made.

The Minnesota Highway Department notes (Book #91, pages 1-24) show that on December 9, 1948, the two-inch by two-inch hub was found and reference ties were made. Then on May 9, 1949 two concrete reference marks were set prior to road construction and on November 9, 1949 the two-inch by two-inch hub was recovered and an eight-inch by 30-inch concrete post was set at the corner.

On February 9, 1951, Mr. C.H. West, land surveyor for the Minnesota Highway Department, filed a Certificate of Replacing Section Corner.

On November 29, 1988, Mr. William Lunser, registered land surveyor, recovered the concrete monument, made reference ties and set a Benton County cast iron monument over the concrete post. A Certificate of Location of Government Corner was filed on December 15, 1988.

On July 7, 1997, the Minnesota Department of Transportation found the Benton County cast iron monument at the corner with the concrete post directly below. All of Mr. Lunser's reference ties were found and checked.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Baxter.

261570

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

Oct 6 8 36 AM '99

ALICE C. BRACKMEYER
COUNTY RECORDER

BY BW. DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 25, Township 36, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 11-29-88 found a Minnesota State Highway Monument
DATE

left monument as found, lowered monument, removed monument (explain)

On 11-29-88 placed a Benton County C.I.M.
DATE

SKETCH OF REFERENCE TIES

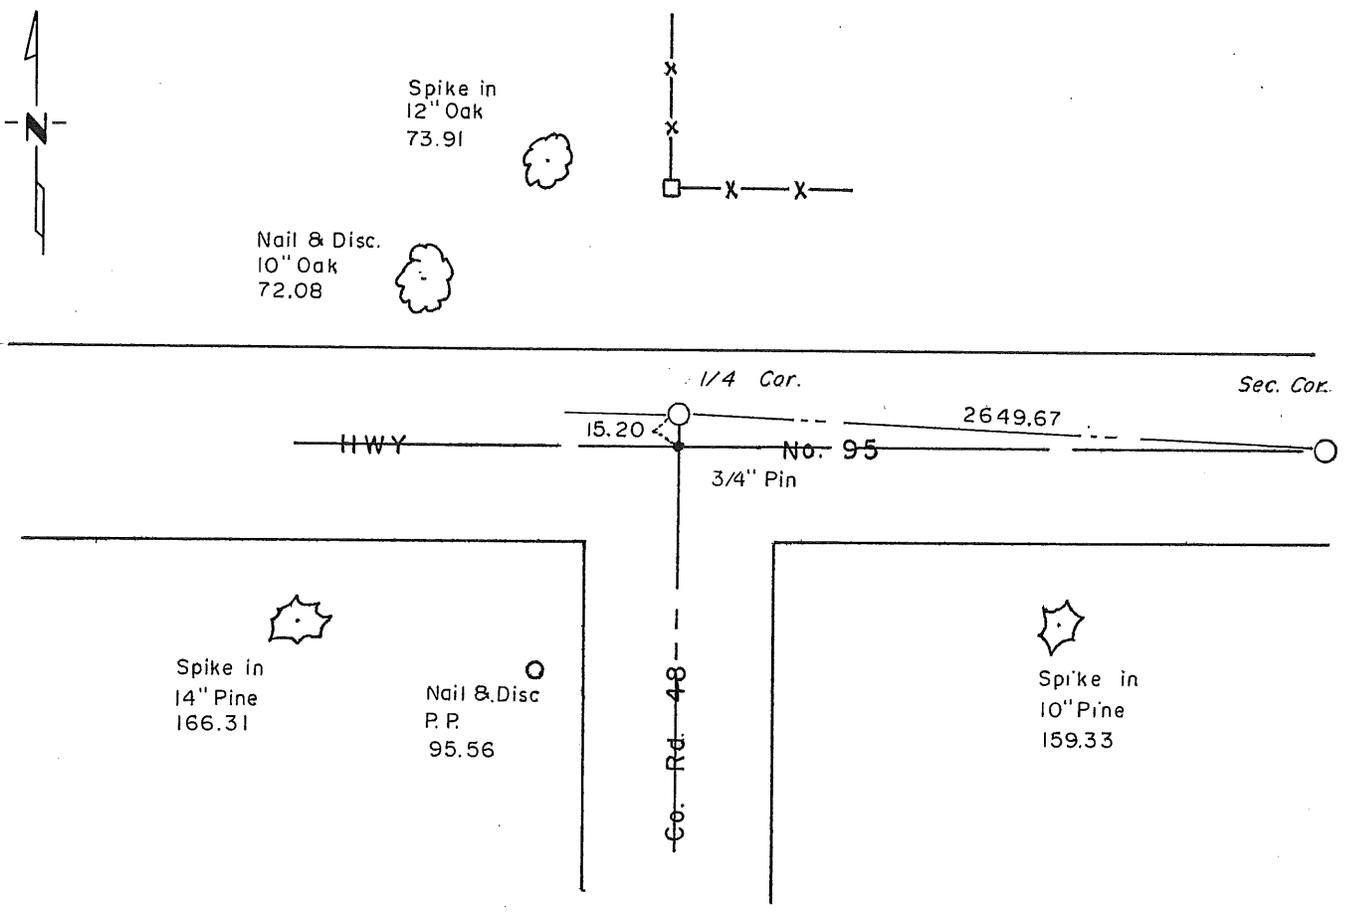

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Linneman 12/15/88
SIGNATURE DATE

Registration No. 9394
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____
By _____, Deputy
DOCUMENT NO. _____

Statement of Evidence:

11-29-88 Minnesota Highway Dept. plans for State Hwy. 95 showed this corner to be 15.20 feet north of the centerline of said Hwy. 95, and on a fence line to the north. Found Hwy. monument down 1.5 feet at said location. Placed Cast Iron Monument on top of it. Measured 15.20 feet to 3/4" pin on the centerline of Hwy. 95.

191255

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 12 08 PM '89

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Jed DEPUTY

CERTIFICATE OF REPLACING SECTION CORNER

N 1/4 Corner to Sec. 25 T. 36N. R. 30W.

State of Minnesota } ss.
County of Benton }

I hereby certify that on 9th day of November 1949

I found the N 1/4 Corner to Sec. 25 Twp. 36N. Rge. 30 W.

which was evidenced by a 2" X 2" wood hub

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of a 8" x 30" round precast concrete monument with cap.

I further certify that I established 2 reference or witness monuments consisting of 8" x 30" precast concrete monument

which reference or witness monuments are located in the manner following:

N.E. 97.51 feet and N.W. 98.14 feet which is approximately 75 feet from center line of T. H. 95.

All reference markers are level with ground and guarded with steel posts

Dated at St. Cloud Minn., this 3rd day of April 1950

Robert J. Jand Surveyor Reg 932

OFFICE OF REGISTER OF DEEDS
County of Benton } ss.

I hereby certify that the within instrument was filed in this office for record on the 9th day of Feb A. D. 1951 at 2 o'clock P.M.

Thomas Niedzielski Register of Deeds

By Deputy