

Certified, Filed and or Recorded on
Aug. 24, 2009 AT 08:19AM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 33, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On APRIL 08 found a CIM
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____
DATE

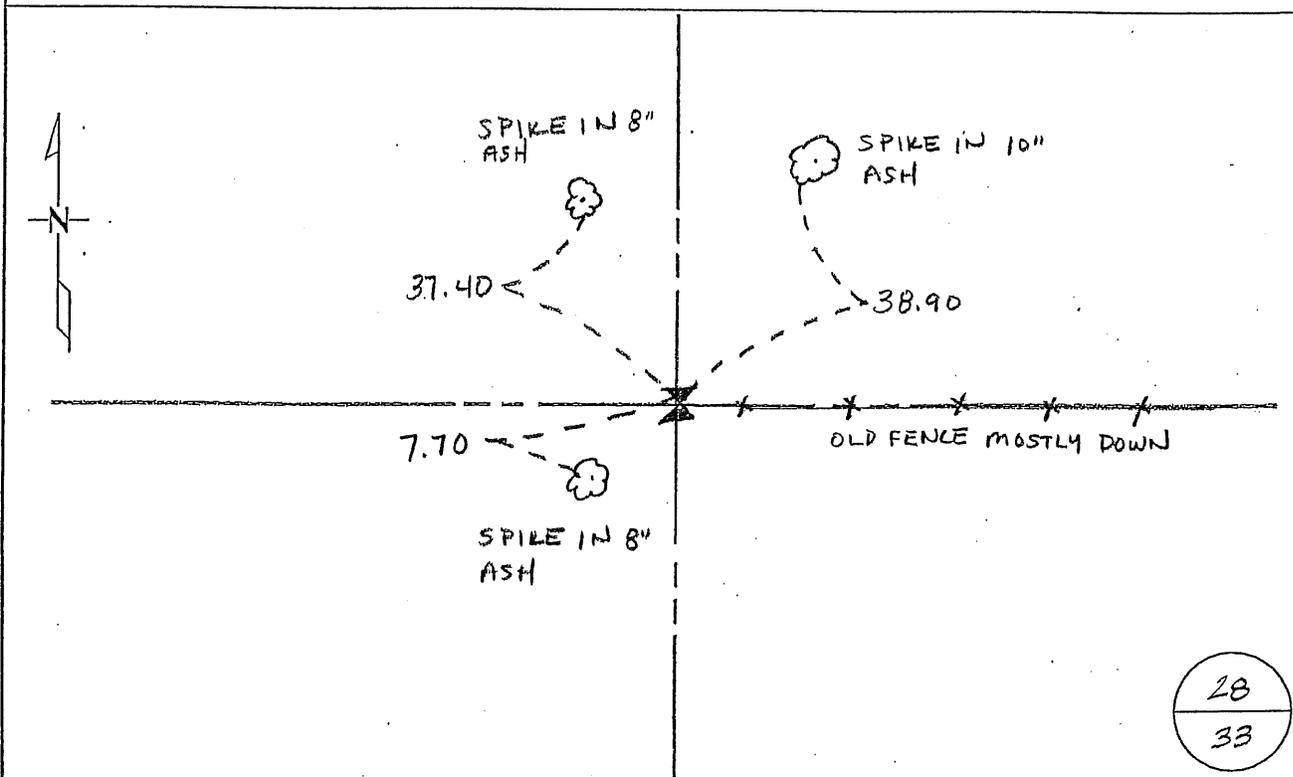

28
33

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 20 August 2009 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

L331

North Quarter Corner of Section 33, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|------------|-----------|
| 8" Blk Oak | S 50 1/2 E | 120 links |
| 4" Blk Oak | N 42 E | 197 links |
- 1979 William Lunser, LS 9394, found a 1/2" pipe at the intersection of fences north/south/east.
- 1984 William Lunser set a cast iron monument at the location of the 1/2" pipe and filed a Certificate of Location (#191259).
- 1992 James Nielsen, LS 11865, found a Benton County cast iron monument and filed a Certificate of Location (#216778).
 County Coordinates obtained from MN/DOT:
 NAD 83 (1986 Adjustment)
 N- 105400.469
 E- 492332.604
- The following MN/DOT R/W plats note a County cast iron monument at the corner:
- | | |
|---------------|---------------|
| June 9, 1993 | Plat No. 5-7 |
| April 5, 1994 | Plat No. 5-14 |
- 2003 County Coordinates obtained by sidetie:
 NAD 83 (1996 Adjustment)
 N- 105401.230
 E- 492332.500
- 2008 Westwood Professional Services, Inc. found a CIM, established reference ties to the corner and verified the 2003 coordinates.


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 33, Township 36N, Range 30W, 4th P.M.
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 04/15/92 found a Benton County cast iron monument
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

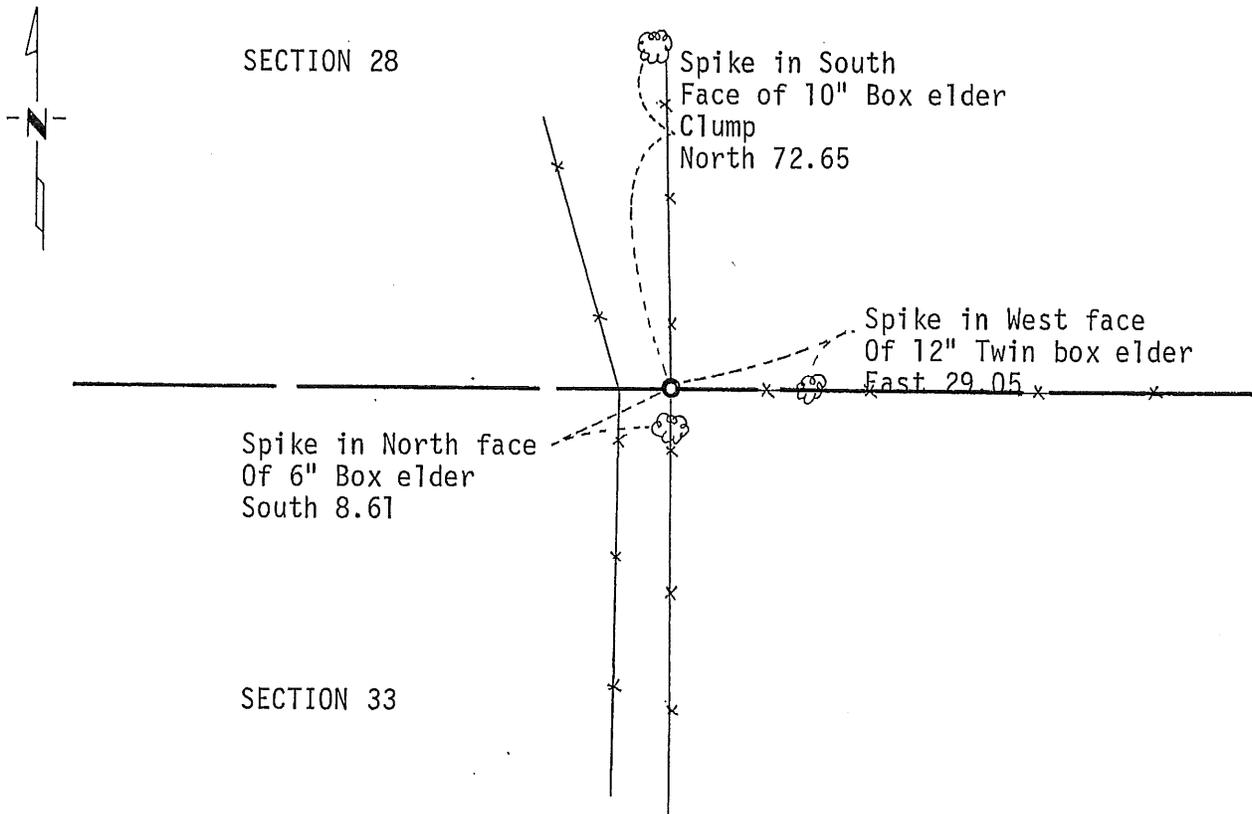

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielson 4/7/1993
SIGNATURE DATE

Registration No. 11865

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence: NORTH QUARTER CORNER SECTION 33, TOWNSHIP 36 NORTH,
RANGE 30 WEST

Reference: Certificate of Location documented by William Lunser dated
12/15/88.

On 04/15/92 Mn/DOT recovered Mr. Lunser's Benton County cast iron
monument and three reference ties. The found monument agrees
favorably with the occupation lines in the area and is accepted by
Mn/DOT as the correct location for the corner.

For details and survey analysis contact the Minnesota Department of
Transportation Surveys Office in Baxter, MN.

216778

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

AUG 3 4 09 PM '93

ALICE C. ENGELMEYER
COUNTY RECORDER

BY ju DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 33, Township 36, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 9-17-79 found a 1/2" iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On 5-21-84 placed a Benton County C.I.M.
DATE

SKETCH OF REFERENCE TIES

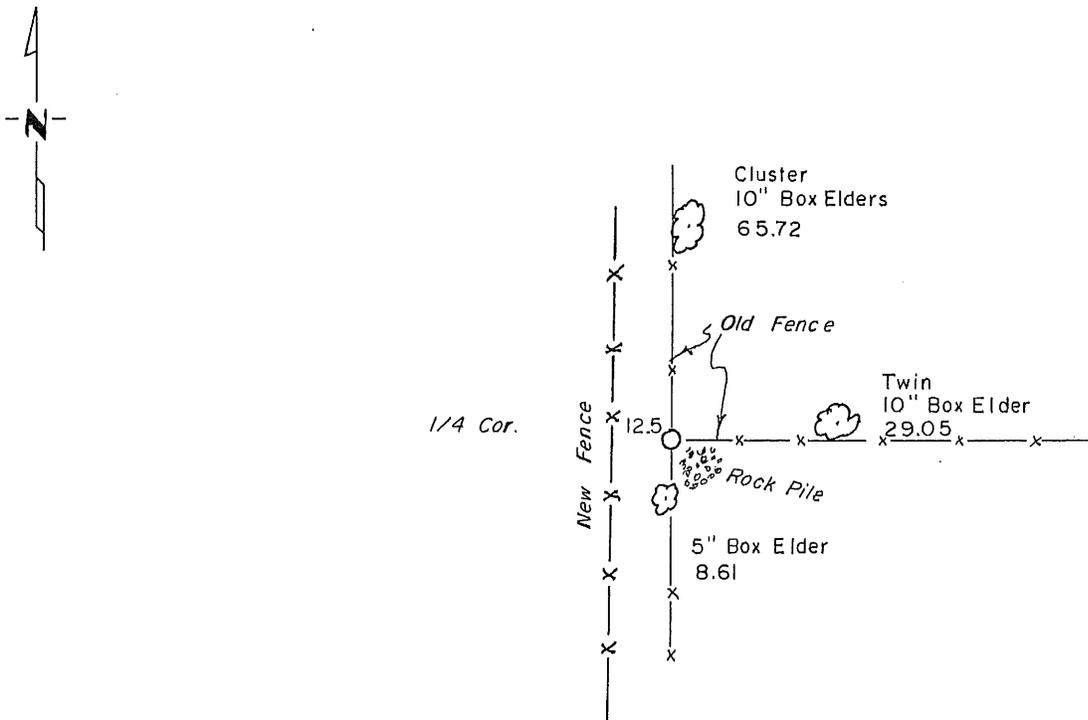

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Luman 12/15/88
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

9-17-79 Found 1/2" iron pipe at the intersection of
fence lines to the north-south and east.

5-14-81 Found same 1/2" iron pipe as used in 1979.

191259

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, AR
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 12 08 PM '89

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *js* DEPUTY