


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to North Corner of Section 34, Township 36N, Range 30W, 4th P.M. Quarter
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 11/23/92 placed a MHD cast iron monument
DATE

SKETCH OF REFERENCE TIES

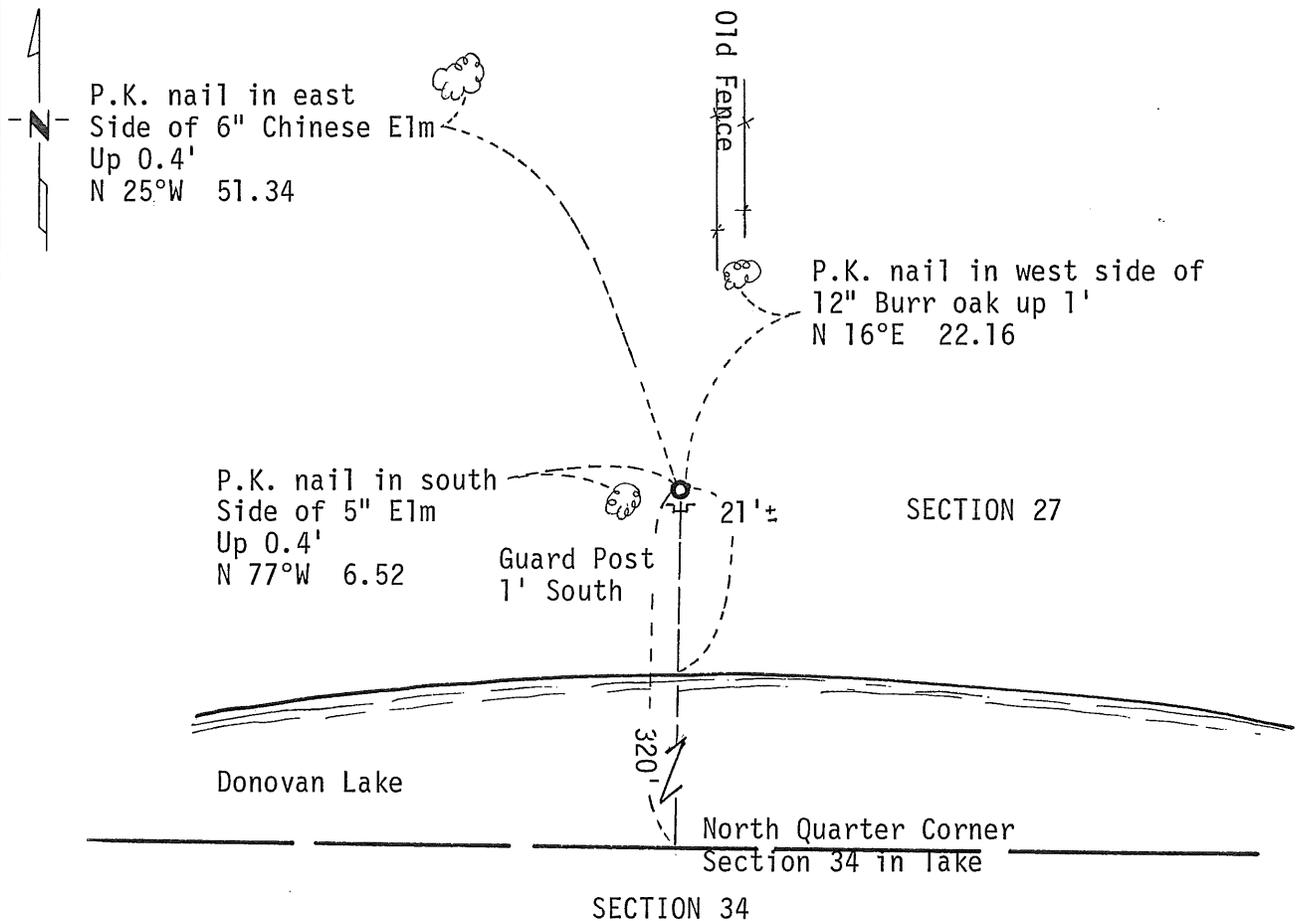

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 1/7/1993
SIGNATURE DATE

Registration No. 11865

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

WITNESS CORNER TO NORTH QUARTER CORNER
SECTION 34, TOWNSHIP 36 NORTH, RANGE 30 WEST

Reference: Certificate of Location by William Lunser dated 10/10/80.

The North Quarter Corner of Section 34 falls in Donovan Lake. Mr. Lunser used proportionate measure to establish a position for this corner. This position is verified by an old fence line running north from the lake.

On 11/23/92 Mn/DOT set a MHD cast iron monument as a witness corner on the north-south quarter line 320.00 feet north of Mr. Lunser's proportionate position.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Section in Baxter, MN.

216779

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

AUG 3 4 09 PM '93

ALICE G. ENGELMEYER
COUNTY RECORDER

BY  DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 34, Township 36, Range 36, _____ P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 10-10-80 found a same line to north
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a no monument placed
DATE

SKETCH OF REFERENCE TIES

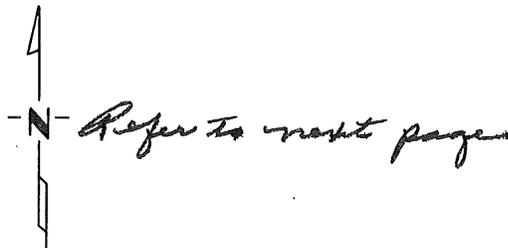

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunsar 10-10-81
SIGNATURE DATE

Registration No. 2394

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 3 P. M. on the 7th day of April A.D., 19 81


County Recorder
Register of Deeds F.A. Johnson
By _____, Deputy

DOCUMENT NO. 152857

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 10th day of October, 1980
I did locate the North Quarter corner of Section 34,
Twp. 36, Rg. 30, Benton County, Minnesota, which
was evidenced by proportionate measure between sections corners
to east and to west. Verified by fence line to north.

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of No monument placed (corner falls in lake) and that
I did establish witness or reference monuments as shown below:

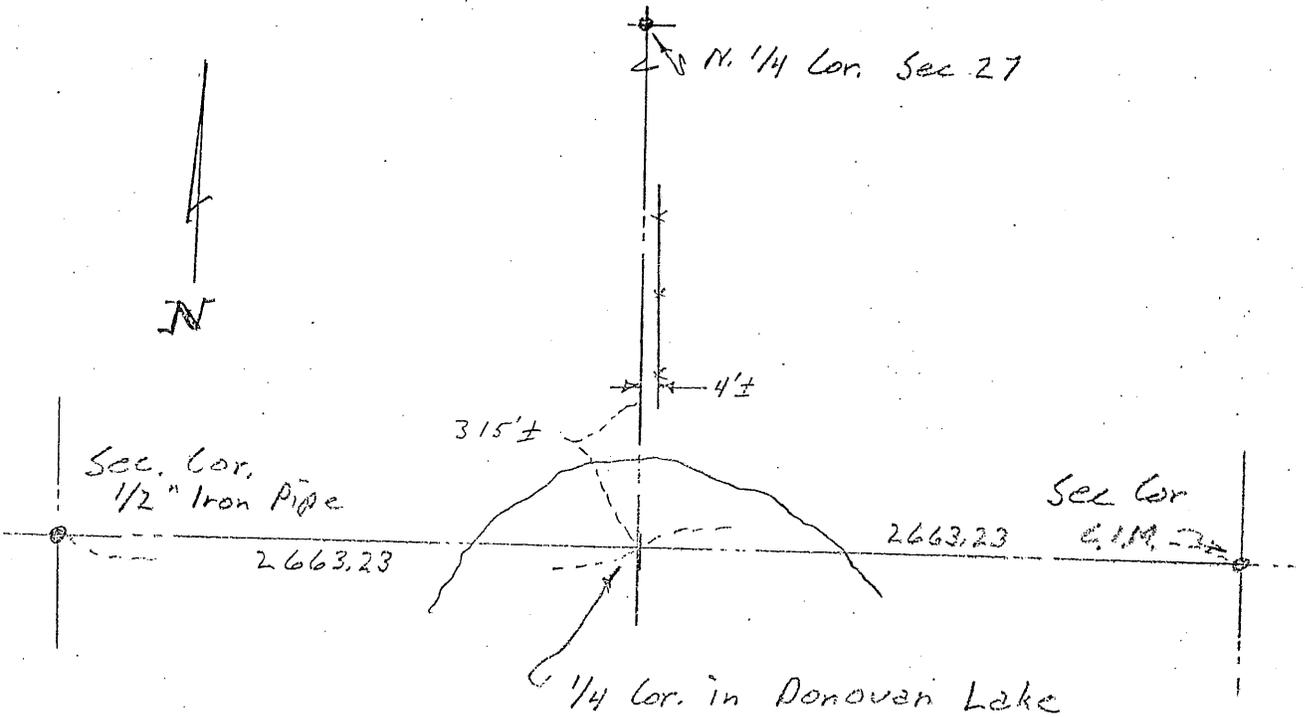

Note: This certificate was not paid for.
JAH

158857

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

Walter P. Jensen

Minn. Registration No. 9394

Office of the County Recorder
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 7th day of April, 1981. 3 P.M.

F.A. Johnson
County Recorder

By _____ Deputy.