

A 356227

Certified, Filed and or Recorded on
Apr. 02, 2008 AT 10:58AM

Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH EAST Corner of Section 4, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 1-23-07 found a CAST IRON MON.
DATE

left monument as found lowered monument removed monument (explain)

On _____ placed on _____
DATE

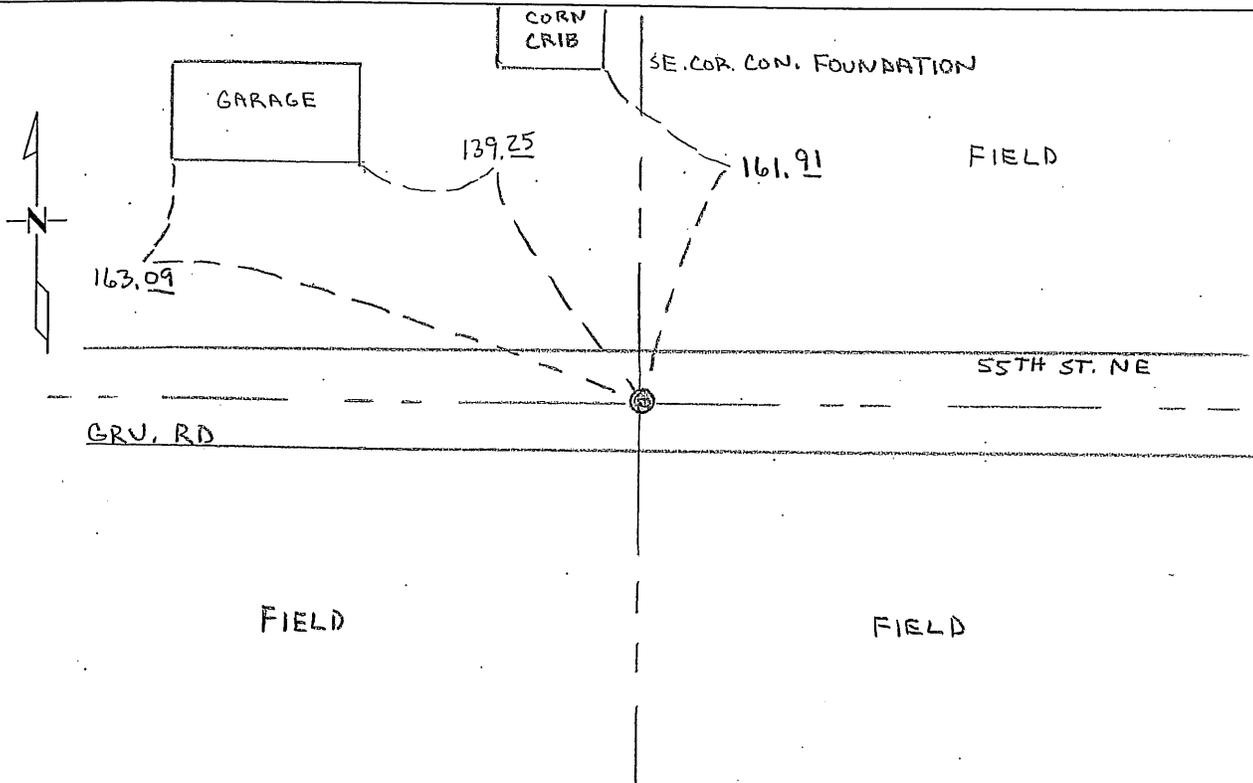

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C Wittstock Date 3-24-2008 License No. 19552

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**L042**

The Northeast Corner of Section 4, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey established this corner and set a wood post and marked bearing trees:
- | | | |
|------------|--------|-----------|
| 8" Blk Oak | S 47 W | 134 links |
| 2" Blk Oak | N 3 E | 37 links |
- 1890 County Road Book, page 32, contains Surveyor's Report by Felix Parrent stating road laid out on section lines south and east from this corner.
- 1989 David Regan, LS 12236, searched and dug in the area of the corner and found nothing. He set a cast iron monument using a section subdivision of Section 3. A Certificate of Location (#195016) was filed. He notes a distance of 2674.17 feet to the North $\frac{1}{4}$ corner of Section 3.
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:
 N- 132257.229
 E- 494577.667
- 2001 William Lunser, LS 9394, notes per Doc. No. 283105 a distance of 2642.22 feet to the East $\frac{1}{4}$ corner of Section 33 of Mayhew Lake Township.
- 2007 Westwood Professional Services, Inc. found a CIM at centerline 55th St. NE and established reference ties. The CIM fits Mr. Regan's distance east within 0.07 feet and Mr. Lunser's distance north within 0.22 feet.

County Coordinates
 NAD 83 (1996 Adjustment)
 N-132257.350
 E-494577.114


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 4, Township 36, Range 30, 4TH P.M.
STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/25/89 placed a Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

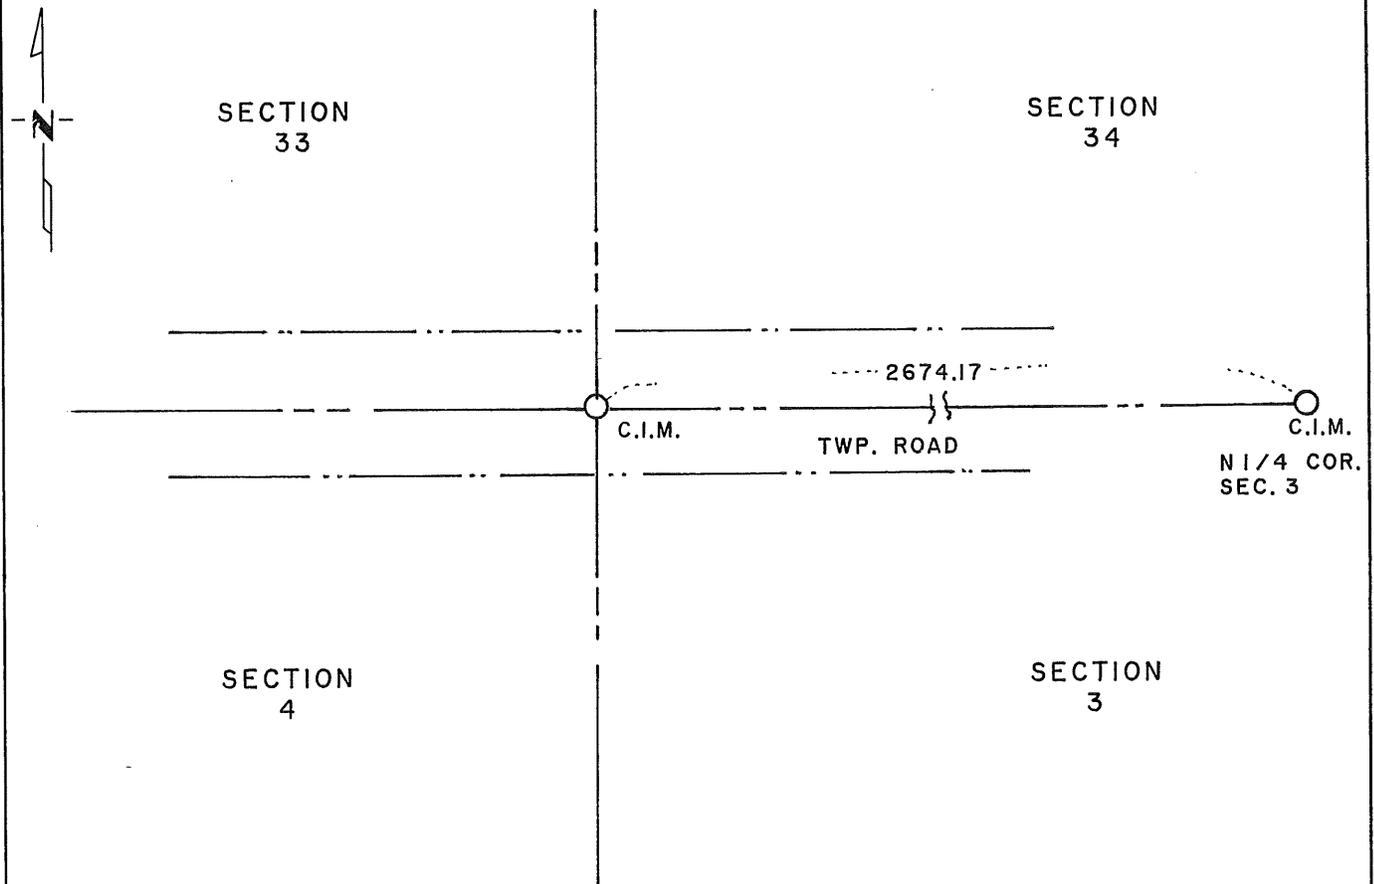

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 10/30/89
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in October, 1849 by Theodore Conkey.

County records show no reference to this corner.

On 5/25/89, David P. Regan Land Surveying, Inc. searched and dug the area and found nothing. Established corner from section subdivision of Section 3 and set a Cast Iron Monument.

195016

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

Nov 2 4 23 PM '89

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *JA* DEPUTY