

A 356231

Certified, Filed and or Recorded on  
Apr. 02, 2008 AT 11:00AM

Signed: CK  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH EAST Corner of Section 6, Township 36, Range 30.  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 1-23-07 found a CAST IRON MON  
DATE

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_  
DATE

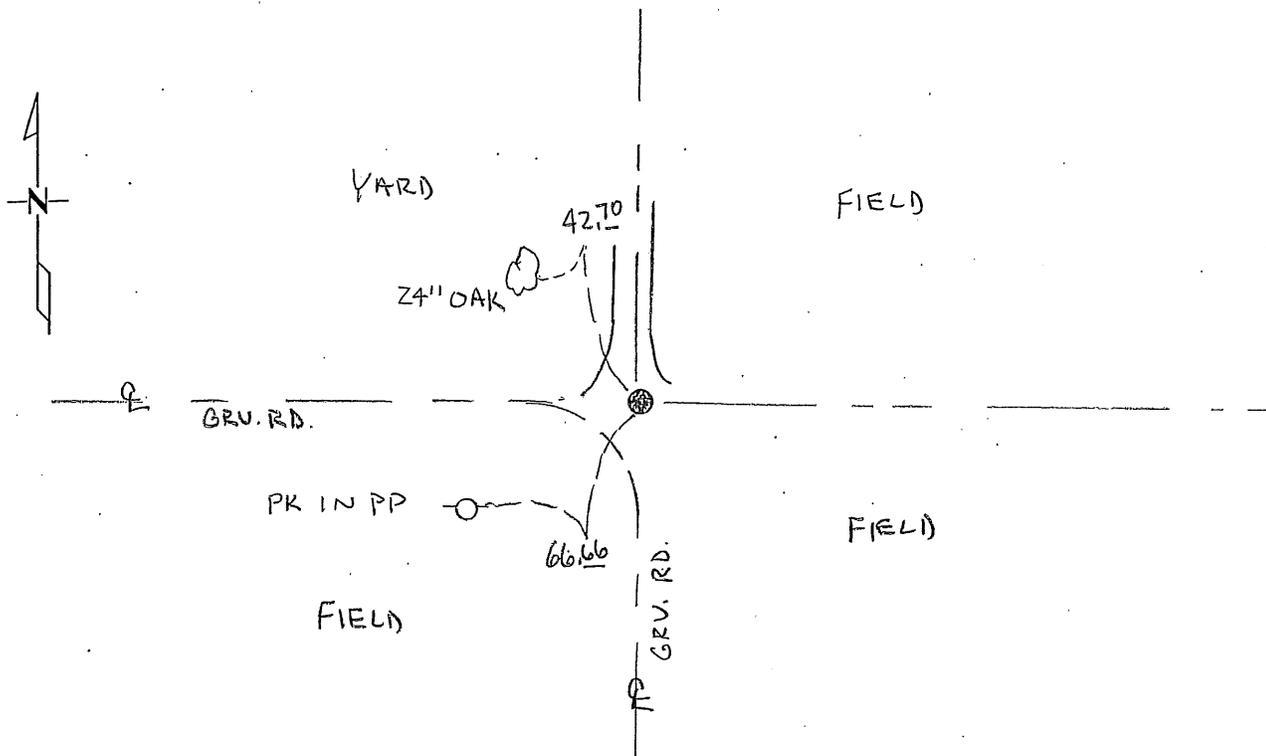

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Wittstock Date 3-24-2008 License No. 19552

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Benton County Surveyor's Office  
 Jerome C. Wittstock, County Surveyor  
 Minnesota License No. 19552

**Statement of Evidence:****L062**

The Northeast Corner of Section 6, Township 36 North, Range 30 West, Minden Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey established this corner and notes a wood post was set with bearing trees marked:

|            |        |           |
|------------|--------|-----------|
| 2" Blk Oak | N 86 E | 170 links |
| 2" Blk Oak | N 55 W | 88 links  |
| 2" Blk Oak | S 74 W | 42 links  |

1917 County Records contain a survey subdividing Section 6 by R.H. West, which notes an iron at this corner.

1980 Paul Wellen, LS 10461, set a cast iron monument at the intersection of the centerlines of town roads south and west. A sketch shows a field road east and drive north. He filed a Certificate of Location (#160201). He measured a distance of 2664.24 feet to the East Quarter Corner Section 31 in Mayhew Lake Township.

1995 Comstock and Davis performed GPS work under contract with Benton County

Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:  
 N- 132166.676  
 E- 483844.570


2007 Westwood Professional Services, Inc. found a CIM at centerlines of gravel roads south and west.

Coordinates Obtained by GPS  
 NAD 83 (1986 Adjustment) to a CIM:  
 N- 132166.806  
 E- 483843.922

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 2 day of January, 1980  
I did set the Northeast corner of Section 6,  
Twp. 36, Rg. 30, Benton County, Minnesota, which  
was evidenced by the centerline intersection of a township road west  
and a township road south, Also a field road to the East.

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of \_\_\_\_\_ and that  
I did establish witness or reference monuments as shown below:

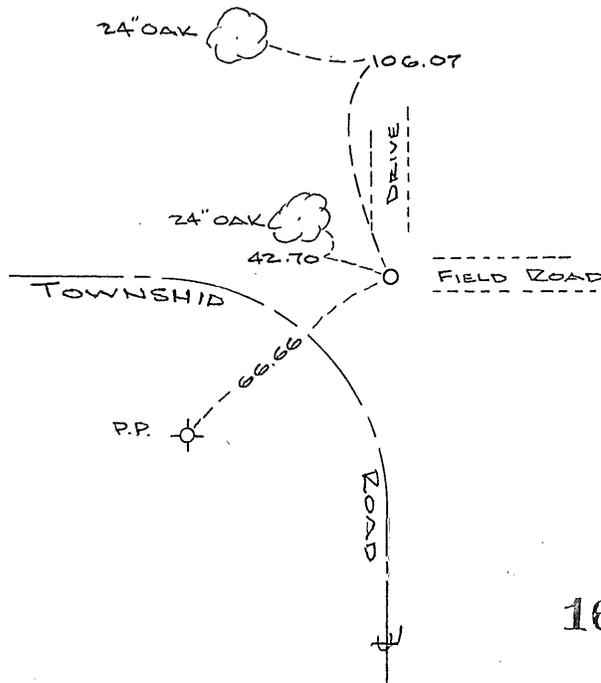

160201

79-175 B-14 P-132

Office of the County Recorder,  
Benton County, Minn.

I hereby certify that the within instrument  
was filed for record in this office on the  
10th day of September, 1981 2 P.M.

F.A. Johnson  
County Recorder

By \_\_\_\_\_ Deputy.

I hereby certify that the above  
is true and correct and that I am  
a registered Land Surveyor under  
the laws of the State of Minnesota.

Paul G. Miller

Minn. Registration No. 10461