

Certified, Filed and or Recorded on
May 06, 2008 AT 01:21PM


Signed: Ju
MARILYN J NOVAK G V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10 APR 2008 found a 3/8" REBAR
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____
DATE

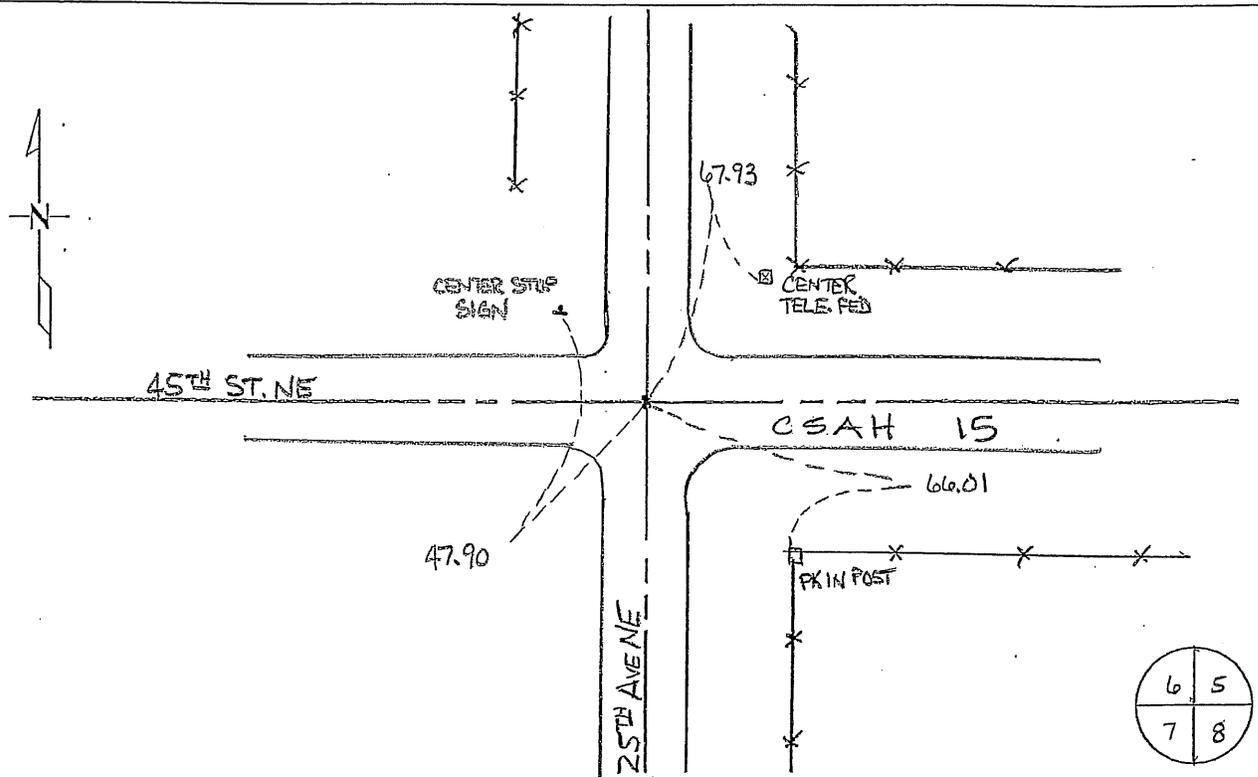

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Wittstock Date 06 May 2008 License No. 19552

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

L072

The Northeast Corner of Section 7, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original General Land Office survey established this corner and a wood post was set for the corner and bearing trees were recorded.

6" Blk Oak N 24 E 1011 links

1917 Survey of Section 6 marked "GG Scherfanberg" by R.H. West notes a stake and an iron at the corner.

1933 County Engineer's Notebook No. 71 contains survey of County road running west to east. Notes show corner marked by a hub in center of road with fence line south and cartway north. Ties are same as in County Surveyor's Record Book 1, page 173:

Cor FP NE 34.2
 2nd FP NW 47.0

Stationing gives distances of 2638.3 feet to the North ¼ corner Sec. 8 and 5511.7 feet to the NW corner Sec. 7 with a delta angle of 0-27' left.

1964 County Highway notes state that they couldn't find corner as set in 1933 and placed hub by measurement with ties:

3rd F. P. NW 62.6'
 4th F.P. SW 71.1'

1961 and 1968, Carley Engineering notes a granite monument at the corner with the following reference ties.

Cor FP NW 45.3
 Cor FP NE 48.9
 Top Tele Stand Pipe SE 48.2

1989 On July 14, 1989 David Regan, LS 12236, found a 1/2" pipe over a granite monument at the intersection of County Road 44 (running east and west) and a Town Road (running north and south). He filed Certificate of Location (#195017).

1995 Comstock and Davis performed GPS work under contract with Benton County
 Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:

N- 126663.753
 E- 484103.588

2002 Westwood Professional Services, Inc. searched road intersection and no monument was found.

2008 Westwood Professional Services, Inc. found a 3/8" iron pin at centerline north/south and east/west roads. Established reference ties.

County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-126663.864
 E-484102.961

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 7, Township 36, Range 30, 4TH P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On 7/14/89 found a 1/2" iron pipe over a stone monument at intersection of
DATE
C.R.# 44 E-W and Township Road N-S
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

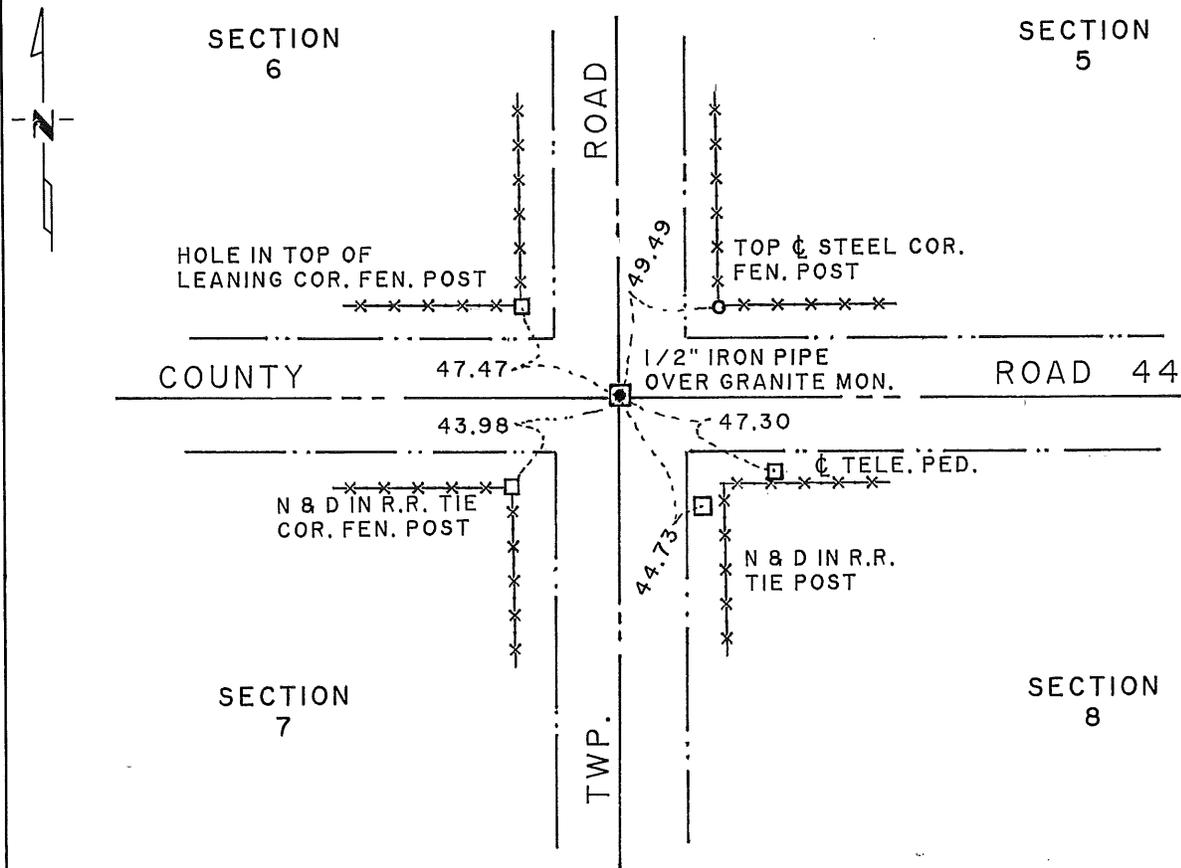

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Ryan 10/30/89
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in September, 1852 by Edwin James.

The County Surveyors records in Book 1, page 173, shows ties to the corner.

In 1961 and 1968, Carley Engineering of St. Cloud tied this corner and show it to be a granite stone.

On 7/14/89, David P. Regan Land Surveying, Inc. found a 1/2" iron pipe over a granite stone monument.

195017

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

NOV 2 4 23 PM '89

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *gk* DEPUTY