

Certified, Filed and or Recorded on
May 06, 2008 AT 01:25PM


Signed: M
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 18, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10 APR. 2008 found a Cast Iron Monument
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____
DATE

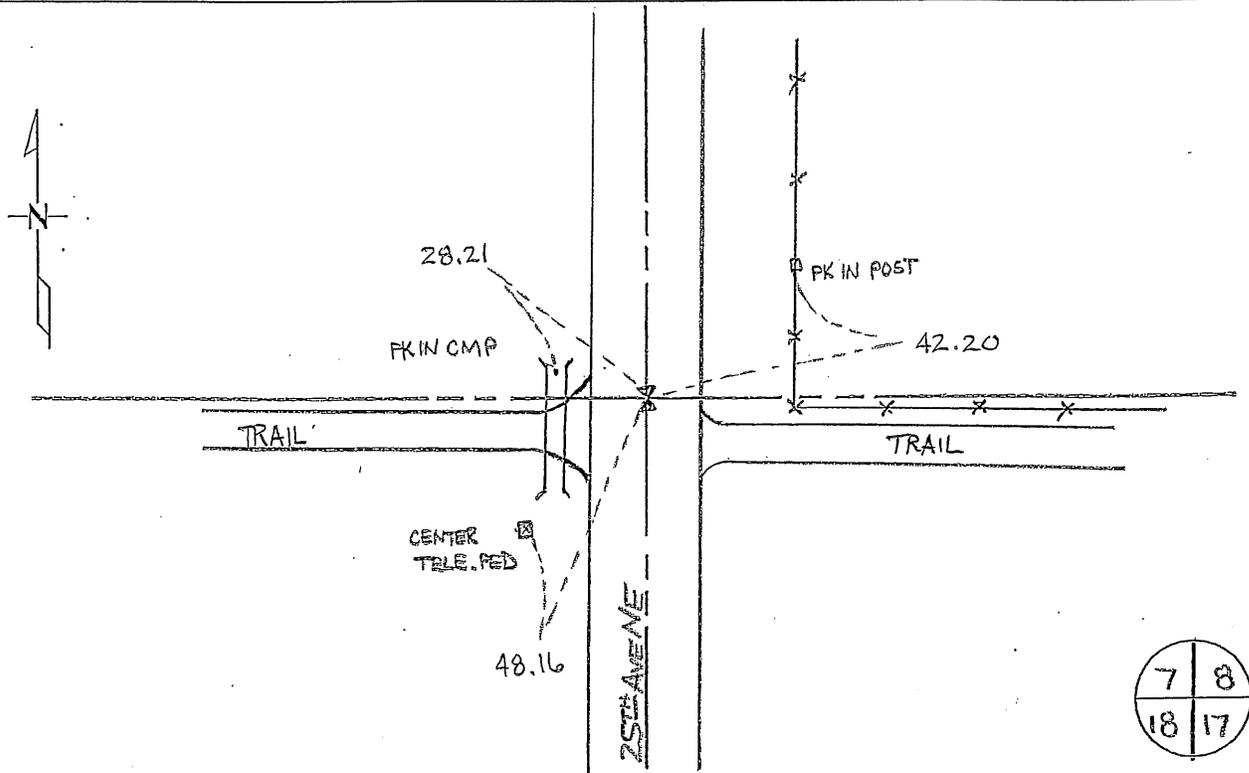

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 06 May 2008 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**L182**

Northeast Corner of Section 18, Township 36 North, Range 30 West, Minden Township,
 4th Principal Meridian, Benton County, Minnesota.

1852 Original General Land Office survey established this corner and set a wood post with bearing trees marked.

8" Blk Oak	N 12 1/2 E	913 links
8" Blk Oak	N 22 1/2 W	292 links

1917 County Surveyor's Record Book 1, page 195, R.H. West notes a stone at the corner and a distance of 2635 feet to the East ¼ corner Sec 7.

1961 In 1961 and 1968, Carley Engineering notes a stone down 2.9 feet at the corner with the following reference ties.

N-end C.M.C.	E	32.60
S-end C.M.C.	SE	37.60
S-end C.M.C.	SW	35.75
N-end C.M.C.	W	27.60

1982 David Regan, LS 12236, found a 1/2" iron pipe over a stone in the centerline of a north/south road and on a fence line east/west. He filed a Certificate of Location (#162592). He set a cast iron monument over the stone and removed the pipe. His ties check well with the 1961 and 1968 ties.

1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:

N- 121377.110
 E- 484133.983

2002 12/16/02, Westwood Professional Services, Inc. found a busted CIM. We measured 2644.45 feet north to the East ¼ corner of Section 7.

County Coordinates obtained by GPS

NAD 83 (1996 Adjustment)

N- 121377.217

E- 484133.395

2008 Westwood Professional Services, Inc. established reference ties to a found CIM.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 18, Township 36, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 6/21/82 found a 1/2 inch iron pipe over stone monument in center line of north-south township road and on fence lines east and west
 left monument as found, lowered monument, removed monument (explain)
- On 6/21/82 placed a Benton County cast iron monument over stone monument- removed iron pipe

SKETCH OF REFERENCE TIES

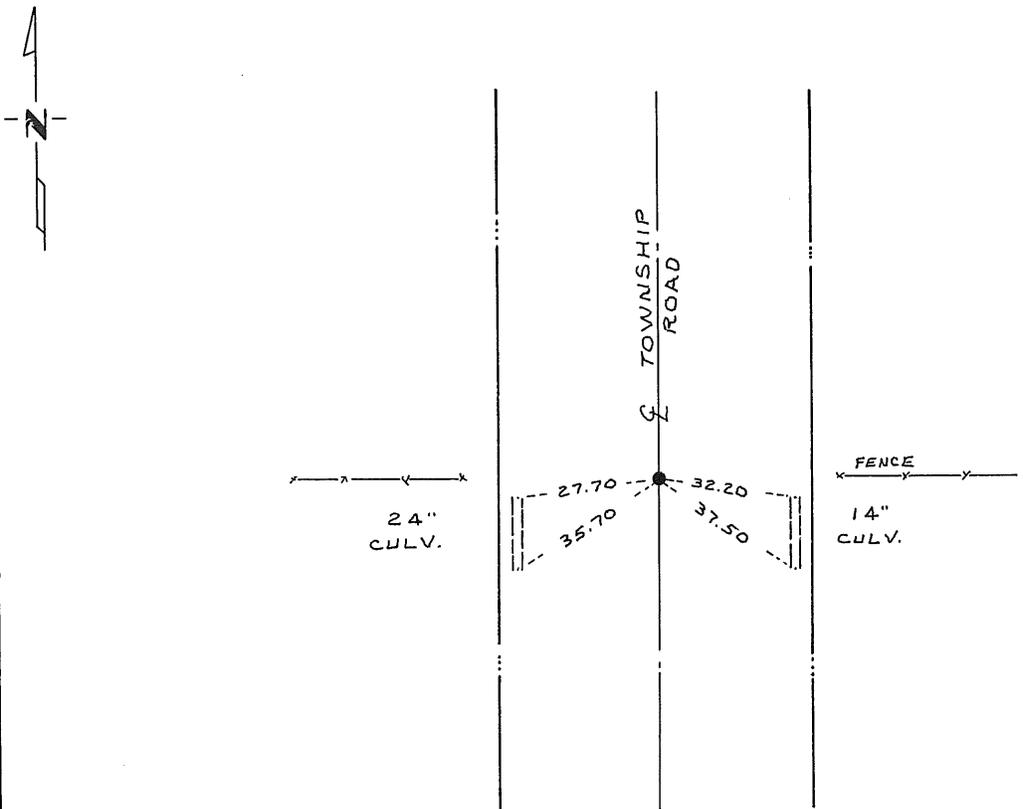

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Ryan 7/13/82
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS ~~County Record~~
County of Benton

I hereby certify that this document was filed in the ~~Reg. of Deeds~~ office at 10 A.M. on the 27th day of July A.D., 1982.

Register of Deeds ~~County Record~~ 7a. Johnson

By _____, Deputy

DOCUMENT NO. 162592