

A 368346

Certified, Filed and or Recorded on
Aug. 24, 2009 AT 08:17AM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 30, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 01 APR 2008 found a IRON PIN
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

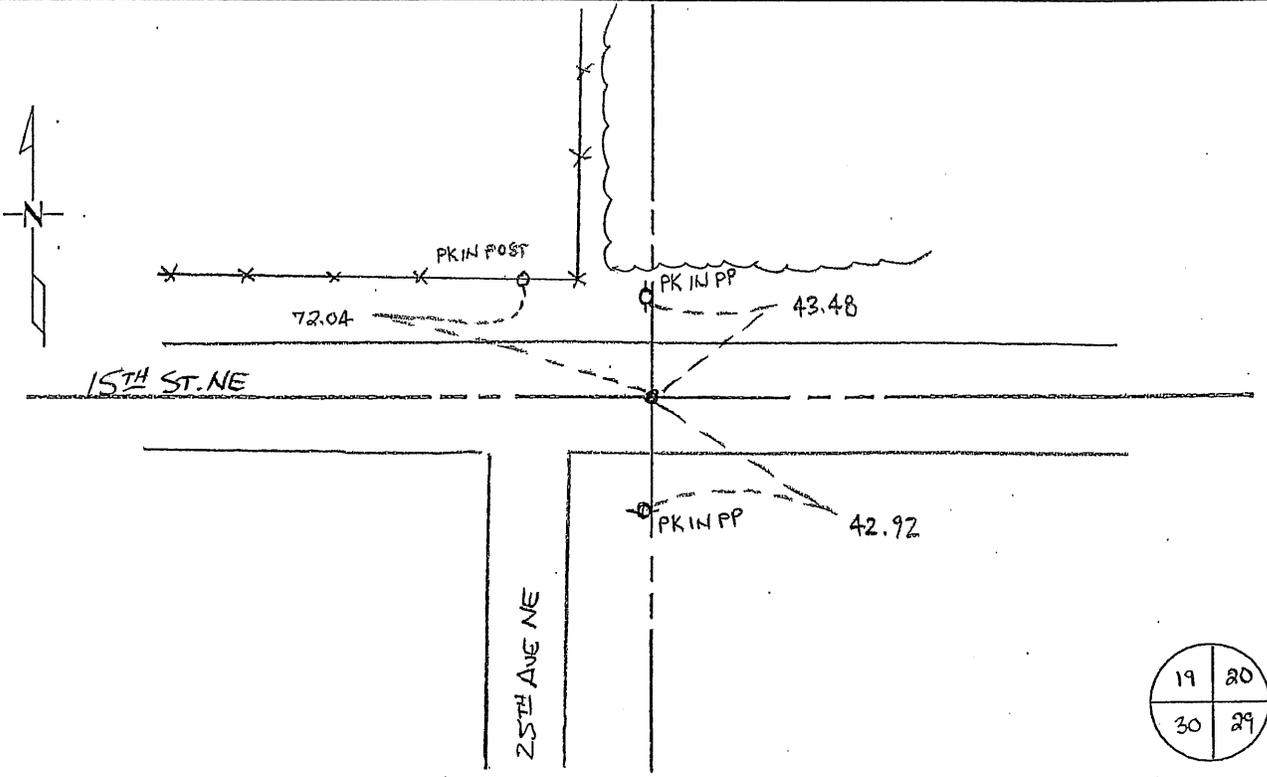

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 20 August 2009 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

L302

Northeast Corner of Section 30, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original U.S. General Land Office survey established this corner and a wood post was set for the corner and bearing trees were recorded.

| | | |
|--------------|------------|------------|
| 12" Burr Oak | N 79 1/2 W | 1100 links |
| 12" Burr Oak | S 61 1/2 E | 710 links |

This corner is noted on the following recorded plats:

| | | |
|--------------------------------|------------|-------------|
| <i>MARCHRIS ADDITION</i> | 11/21/1983 | David Regan |
| <i>MARCHRIS FIRST ADDITION</i> | 6/196/1987 | David Regan |

1912 County Engineer's Notebook 2, pages 101 to 104, is a road survey for SR No. 8 by M. J. Cleveland. Survey runs east-west along section lines. Notes state: "Did not search for corner - set monument in center of road." Ties:

| | | | | | |
|----------------|-----|-------|----------------|-------|-------|
| Asp. | NW | 44.7' | Red O. | SW | 23.2' |
| Fen. Cor.North | 27' | | Fen. Cor.South | 32.4' | |

1915 County Surveyor's Record Book 1, page 158, and Map No. 10 by J.P. Soderstrum shows he found a stone at the corner. He notes a distance of 40.2 chains (2653.2 feet) to the North 1/4 corner Sec 30, which he set lost.

1917 County Surveyor's Record Book 1, page 199-200, and Record Book A, Map No. 44, contains a survey of Section 20 by N. Drolson. He set a post at a fence line north/south according to the testimony of a landowner. This position checked well with the south line of Sec 19 and the west line of Sec 20. There were no signs of the BT's. He notes a distance of 40.01 chains to the East 1/4 corner Sec 19 and a distance of 40.67 chains to the North 1/4 corner Sec 29. Made the following ties:

| | | | | | |
|-----------|----|----------|-----------|--------|-----------|
| Tele Pole | SE | 71 links | Tele Pole | N 80 W | 189 links |
|-----------|----|----------|-----------|--------|-----------|

1931 County Surveyor's Record Book 1, page 219, notes a stone at the corner with the following reference ties.

| | | | | | |
|---------------------------|----|-------|---------|----|-------|
| 5" Asp | NW | 44.7' | Red Oak | SW | 93.2' |
| Mt. at centerline of road | | | | | |

1973 William Lunser, LS 9394, set a RR spike at the intersection of the occupation lines, a road (running east and west) and an occupation line (running north and south). A Certificate of Location (#134368) was recorded. A distance of 2638.94 feet was noted between the East 1/4 Corner and the NE Corner of Section 30.

1987 Paul Wellen's, LS 10461, records a PK at the corner. He notes a distance of 2651.59 feet to the North 1/4 corner Sec 30.

1992 James Nielsen, LS 11865, found a RR spike at the corner location. A Certificate of Location (#216771) was recorded.

County Coordinates obtained from MN/DOT
 NAD 83 (1986 Adjustment)
 N- 110776.685 E- 484184.835

1993-94 MN/DOT Road Alignment and Road R/W Plat No. 05-4 note a RR Spike at the corner.

1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a RR spike:

N- 110776.959
 E- 484184.990

2002 Westwood Professional Services, Inc. found RR spike.

County Coordinates Obtained by GPS (RR Spike)
 NAD 83 (1996 Adjustment)
 N-110777.084
 E-484184.415

2008 Westwood Professional Services, Inc. found a 1/2" iron pin at the centerline of east/west road, established reference ties and verified the 2002 coordinates.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 30, Township 36N, Range 30W, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 4/13/92 found a railroad spike (down 0.4')
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

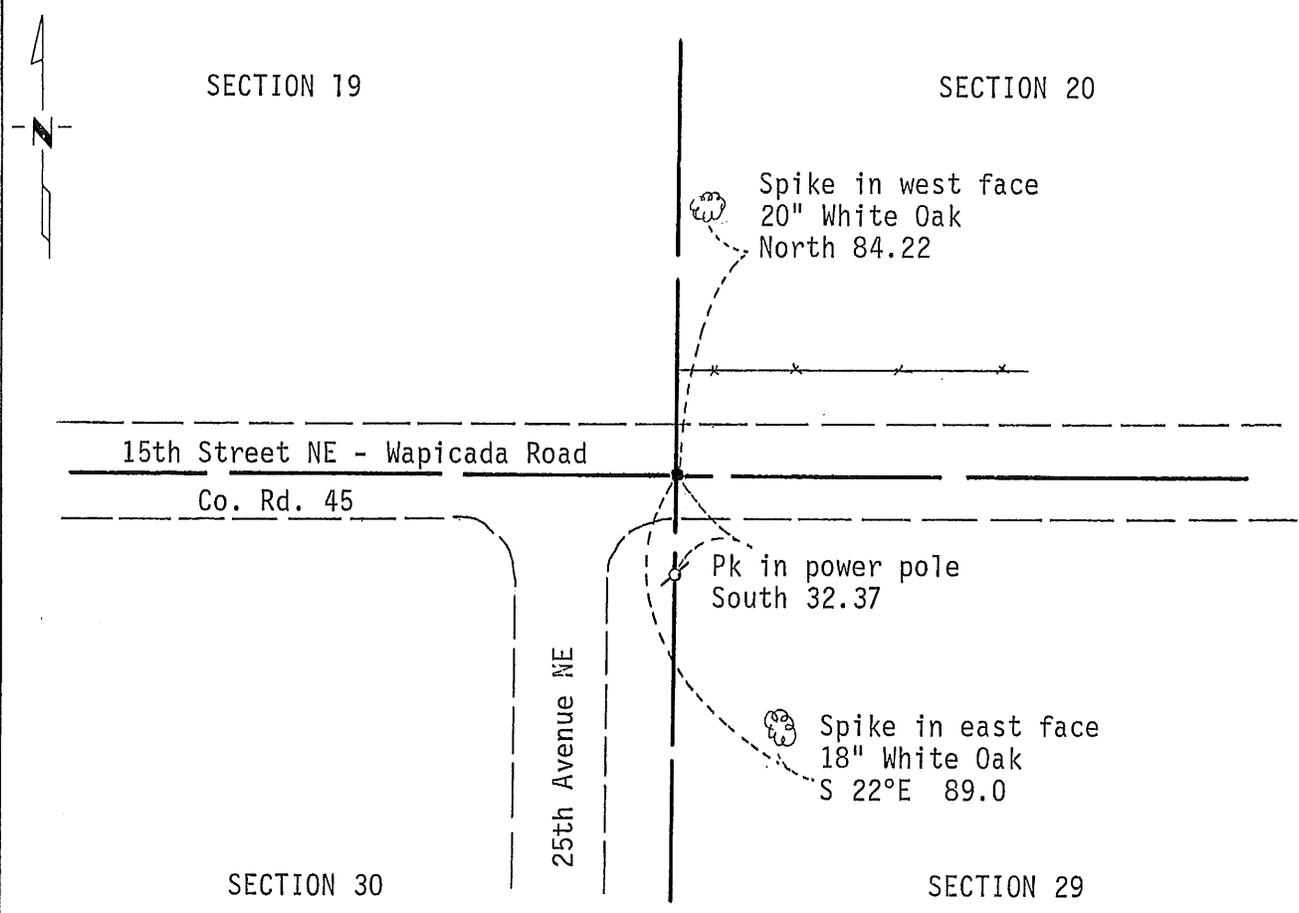

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nieland 1/7/1993
SIGNATURE DATE

Registration No. 11865

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence: NORTHEAST CORNER SECTION 30, TOWNSHIP 36 NORTH,
RANGE 30 WEST

Reference: Certificate of Location Document #134368 filed 6/11/73 by William Lunser.

On 04/13/92 Mn/DOT recovered Mr. Lunser's railroad spike and all of the reference ties. The found monument agrees with the occupation lines and is accepted by Mn/DOT as the correct location for the corner.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Section in Baxter, MN.

216771

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

AUG 3 4 09 PM '93


ALICE C. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 6 day of February, 1973
I did Restore the North East corner of Section 30,
Twp. 36, Rg. 30, Benton County, Minnesota, which
was evidenced by Occupation North and South, Center Road East
and West

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of Railroad Spike and that
I did establish witness or reference monuments as shown below:

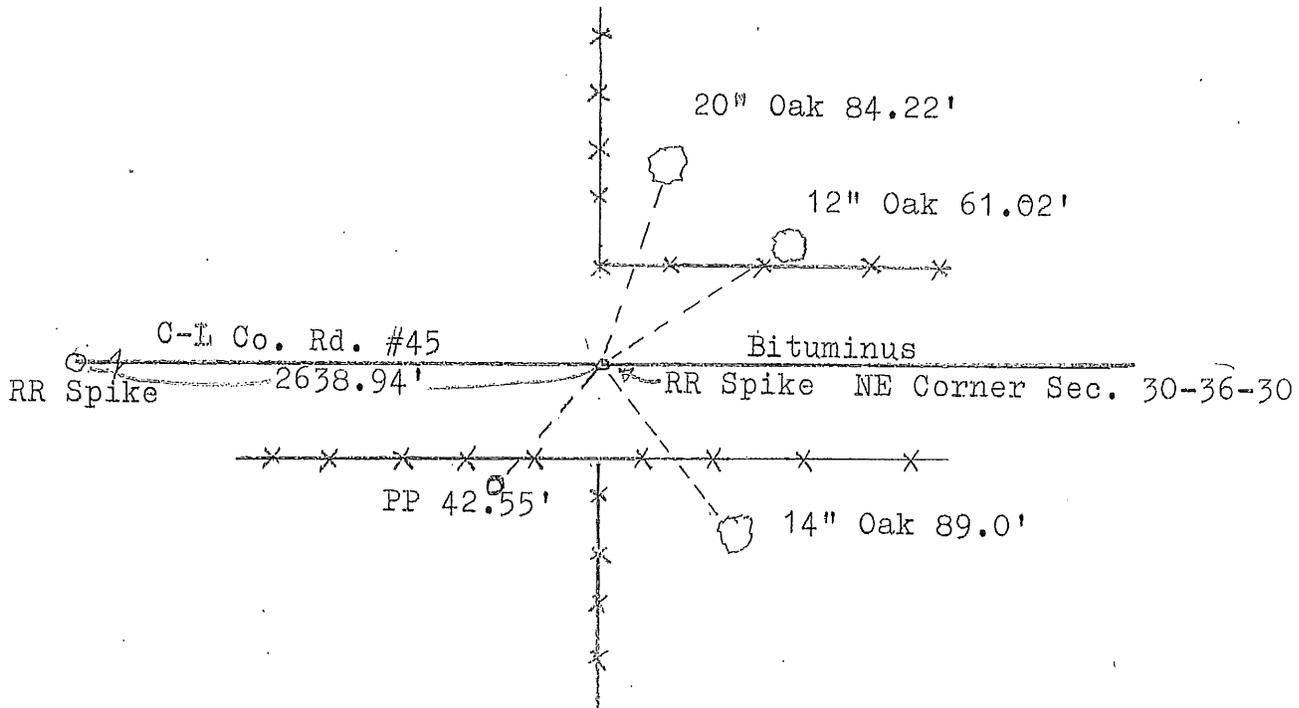

134368

I hereby certify that the
above is true and correct
and that I am a registered
Land Surveyor under the laws
of the State of Minnesota.

William E. Jensen

Minn. Registration No. 9394

Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within
instrument was filed for record
in this office on the 11 day of
June, 1973.

J. A. Johnson
Register of Deeds

By M. Novak Deputy.