

A 368333

Certified, Filed and or Recorded on  
Aug. 24, 2009 AT 08:13AM


Signed: CK  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 36, Township 36, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 25 MAR 08 found a Cast Iron Monument  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_  
DATE

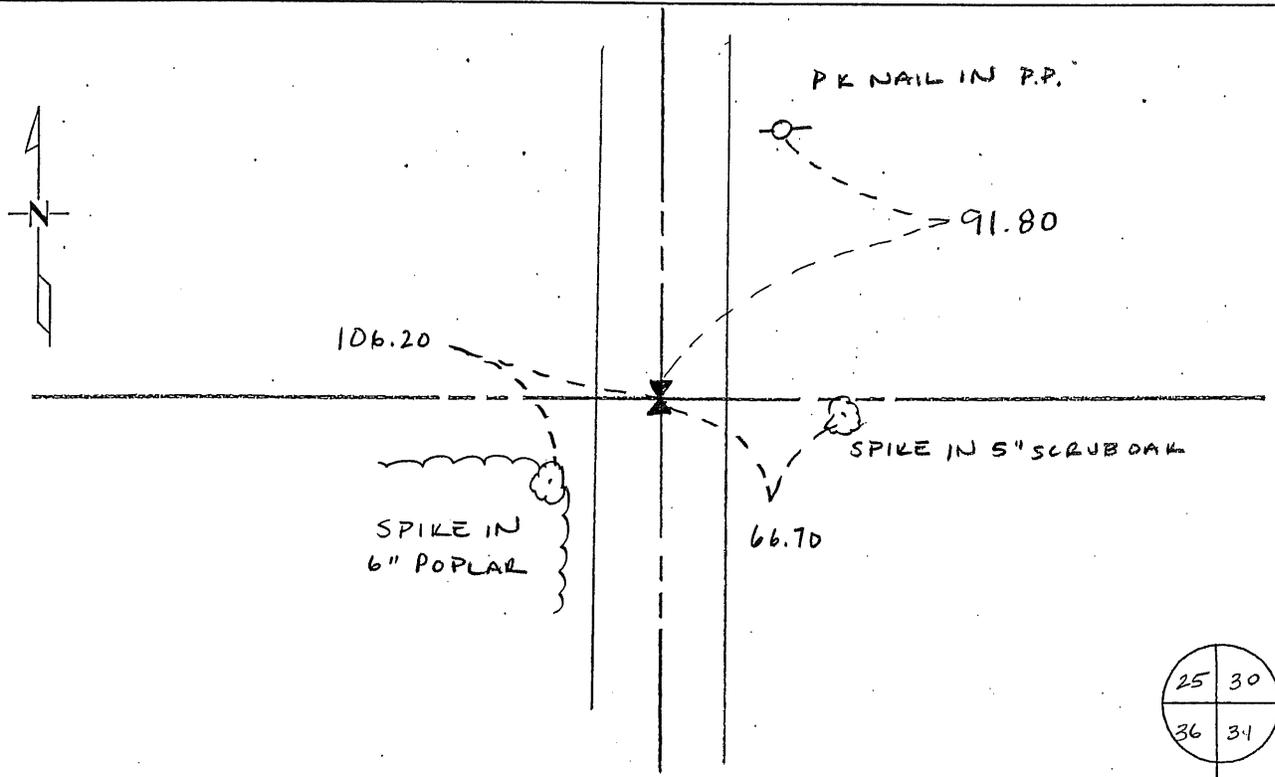

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 20 August 2009 License No. 19552  
Title:     Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Benton County Surveyor's Office  
 Jerome C. Wittstock, County Surveyor  
 Minnesota License No. 19552

**Statement of Evidence:**

L362

The Northeast Quarter Corner of Section 36, Township 36 North, Range 30 West, Minden Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey established this corner and set a wood post at this location and bearing trees were recorded.  
       8" Bur Oak   S 88 1/2 W   872 links  
       8" Bur Oak   N 39 W 272 links
- 1930 County Engineer's Notebook No. 60 and County Surveyor's Record Book 1, page 231, notes a hub at the corner with the following reference ties.  
       Cor F.P.       E       25.8  
       F.P.         NE       44.9  
 Notes show fence line east and a delta angle of 0-30' right (running south to north).
- 1990 William Lunser, LS 9394, found a 1/2" iron pin at the intersection of a fence line to the East, a field line to the West and the centerline of County Road 25 (running north and south). Replaced with a cast iron monument. He notes that the distance to the East 1/4 Corner of Section 25 is 2681.78 feet and the distance to the South 1/4 Corner of Section 30 is 2821.74 feet. A Certificate of Location (#201529) was recorded.
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:  
 N- 105358.648  
 E- 510935.934
- 2000 County Coordinates from Bogart & Pederson:  
 NAD83 (1986 Adjustment)  
 N - 105358.377  
 E - 510936.284
- 2001 In August 2001 Westwood Professional Services, Inc. found a cast iron monument at the centerline of County Road 25 (running north and south) and occupation to the east and the west. No evidence found of GLO or 1930 ties.
- 2004 County Coordinates obtained by GPS to CIM.  
 NAD83 (1996 Adjustment)  
 N - 105358.730  
 E - 510935.454
- 2008 Westwood Professional Services, Inc. found a CIM and established new reference ties and verified the 2004 coordinates and 1990 distances.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 36, Township 36, Range 30, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 3-3-90 found a 1/2" PIN  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 3-3-90 placed a CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

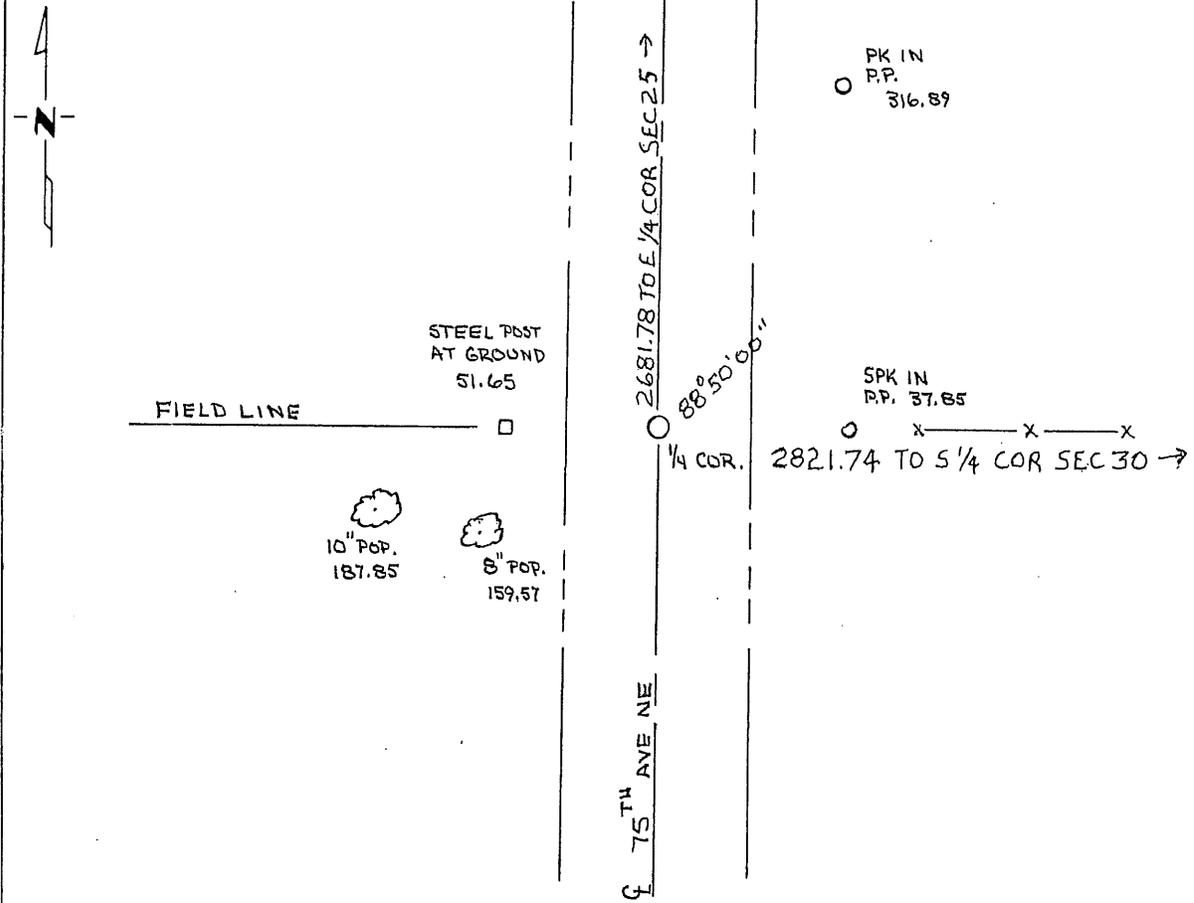

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Larson 2/14/91  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

Benton County Records showed no reference to this corner other than U.S. Government Survey.

On 3-3-90 Searched the area and found a  $\frac{1}{2}$ " Pin at the intersection of a fence line to the East, a field line to the West and the centerline of County Road 25 (75th Ave. N.E.). Removed the pin and placed a cast iron monument at that location.

201529

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

FEB 26 12 24 PM '91

ALICE C. ENGELMEYER  
COUNTY RECORDER

BY     *ged*     DEPUTY