

Certified, Filed and or Recorded on
Feb. 12, 2010 AT 12:53PM


Signed: JN
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH QUARTER Corner of Section 32, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 01/06/09 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

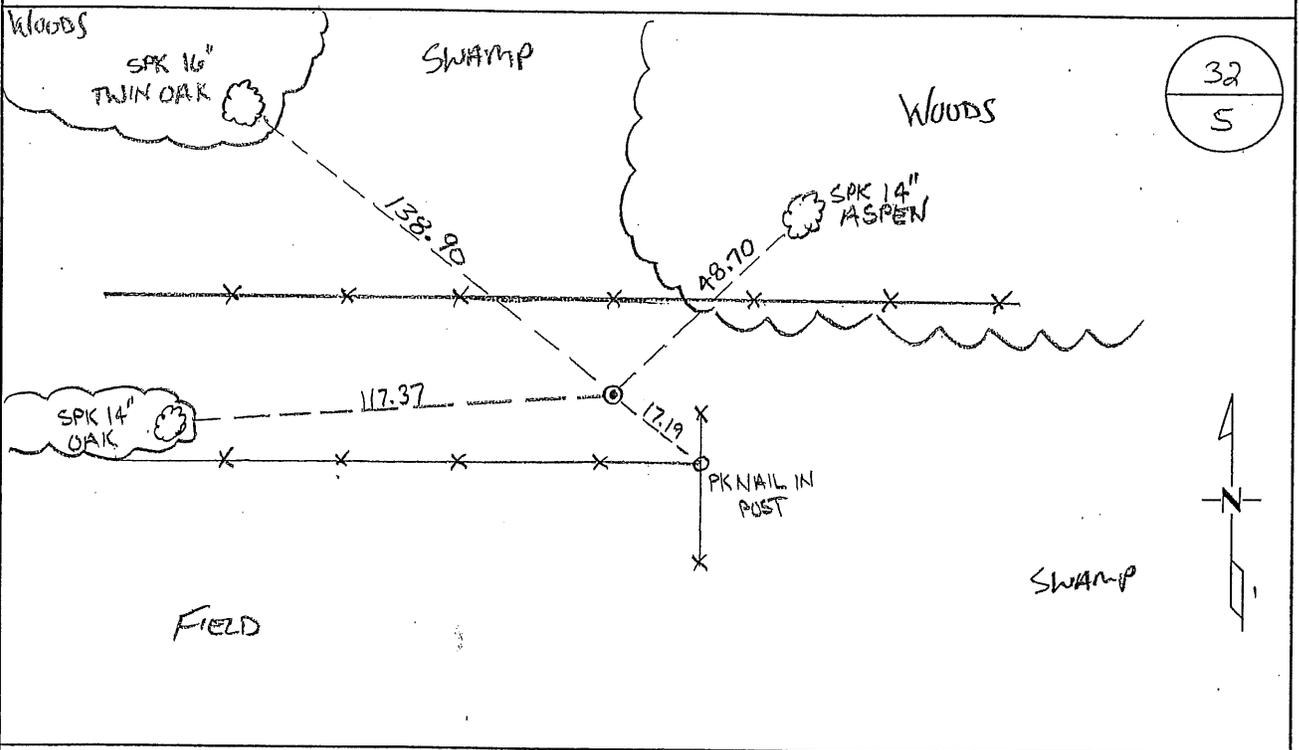

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 02/05/2010

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**L325**

The South Quarter Corner of Section 32, Township 36 North, Range 30 West, Minden Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|--------|-----------|
| 4" Blk Oak | S 30 W | 131 links |
| 2" Bur Oak | N 45 W | 73 links |
- 1974 John Oliver, LS 8194, Sherburne County Surveyor, re-established the corner on a straight line between the NE and NW corners Sec 5 and on the southerly extension of a fence line from the north. He set a cast iron monument at the corner location. A Sherburne County Certificate of Location (#130984) was filed.
- 1993 Sherburne County Surveyor's Office found CIM and updated ties.
- County Coordinates converted from Sherburne County Coordinates
 NAD83 (1986 Adjustment)
 N - 100033.45
 E - 487149.40
- 2003 County Coordinates obtained by GPS (CIM)
 NAD 83 (1996 Adjustment)
 N- 100034.845
 E- 487148.539
- 2009 Westwood Professional Services, Inc. found a CIM and measured a distance of 2659.84 feet to the SW corner of Section 32 and 2680.18 feet to the SE corner of Section 32. Reference ties were established and the 2003 coordinates were verified.