

Certified, Filed and or Recorded on
Feb. 12, 2010 AT 12:55PM


Signed: Marilyn J Novak
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTHEAST Corner of Section 31, Township 36, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 01/06/10 found a 1" X 10' IRON PIPE WITH SHERBURNE COUNTY SURVEYOR CAP
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

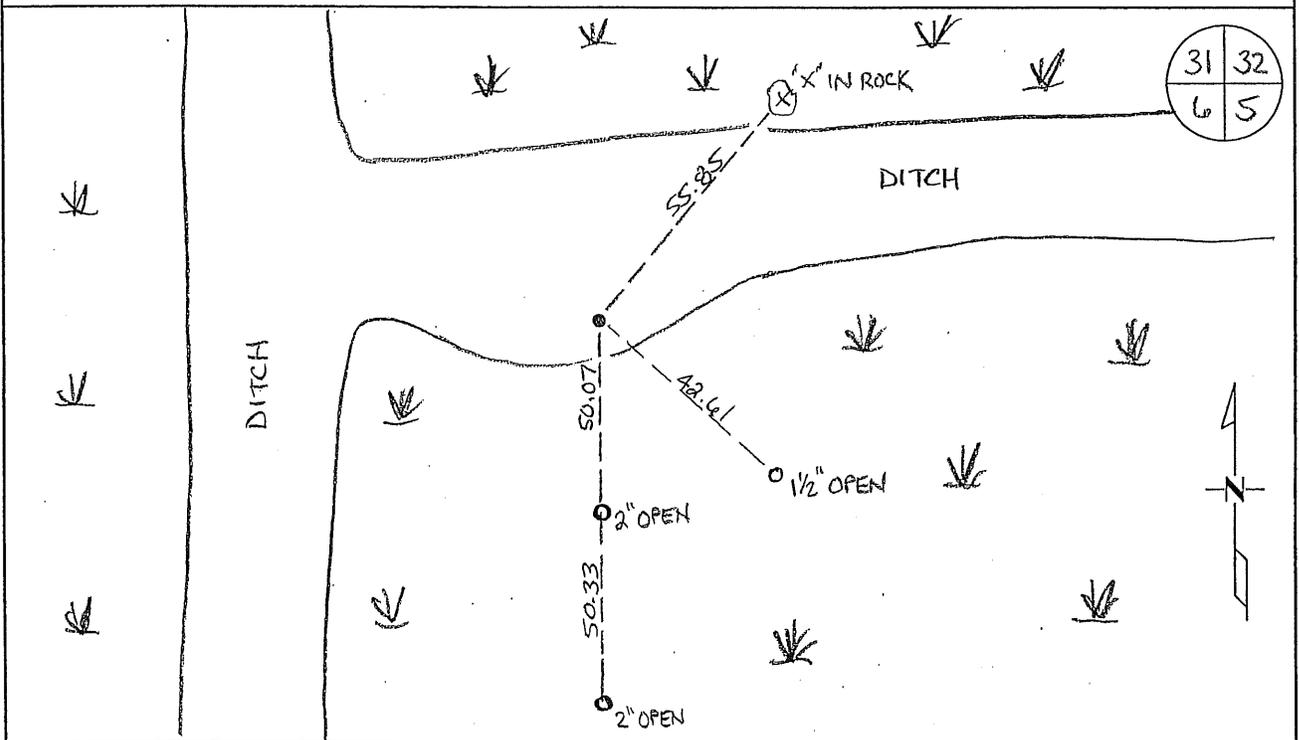

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 02/05/2010

Statement of Evidence:**L314**

Southeast Corner of Section 31, Township 36 North, Range 30 West, Minden Township,
4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:

10" Tamarack	N 87 1/4 W	821 links
12" Tamarack	S 83 3/4 W	865 links

Pre 1940 MN/DOT notes by C. H. West for proposed alignment of TH 95 show + on square stone monument.

1974 John Oliver, LS 8194, Sherburne County Surveyor, re-established the corner on an easterly projection line between the NW and N 1/4 corners of Section 6 and at the same east/west position of an iron pipe as set by Carley Engineering. This position agrees with the local testimony as to the location of an old stone that was removed when the ditch was dug. He set a 2" iron pipe up 2.0 feet. A Sherburne County Certificate of Location (#130985) was filed.

1992 County Coordinates obtained from MN/DOT to Witness 1 1/4" iron pipe:
NAD 83 (1986 Adjustment)
N- 99953.632
E- 484491.830

2003 Westwood Professional Services, Inc. established position of the corner from reference iron 50.00 feet south and distances to corners east, west, and north.
County Coordinates Determined:
NAD83 (1996 Adjustment)
N - 100054.425
E - 484488.397

2009 Westwood Professional Services, Inc. found a 1 1/4" iron pipe with a Sherburne County Surveyor cap. A distance of 2659.45 feet was measured to the south Quarter Corner of Section 31 and a distance of 2659.837 feet was measured from the south Quarter Corner of Section 32. Reference ties taken by John Oliver in 1974 and verified by Mike Trunk in 1993 were checked and new ties were taken.

County Coordinates Obtained by GPS:
NAD 83 (1996 Adjustment)
N - 100054.468
E - 484488.774