

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 02:01PM

Signed: BW
MARILYN J NOVAK 6 11
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 3, Township 26N, Range 31W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 12/1/08 found a 1 1/2" OPEN IRON PIPE DOWN 0.2'

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

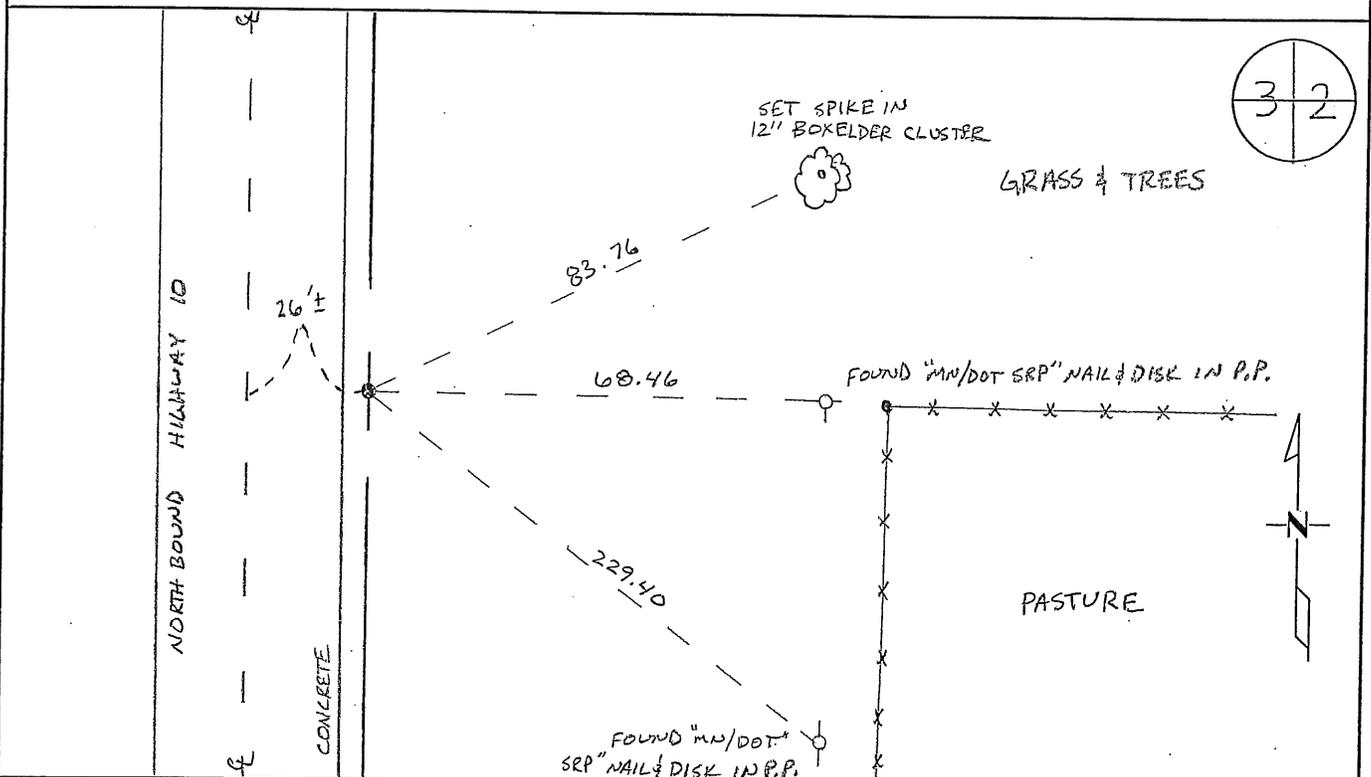

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature M. Lewis
Deputy Benton County Surveyor
License No. 46170

Date: 12/12/08

PAGE 1 OF 2

Benton County Surveyor's Office
 Nancy H. Lewis, Deputy County Surveyor
 Minnesota License No. 46170

Statement of Evidence:**M033**

East Corner of Section 3, Township 36 North, Range 31 West, Sauk Rapids Township,
 4th Principal Meridian, Benton County, Minnesota.

1850 Original US General Land Office survey set a wood post for this location and bearing trees were recorded.

12" Aspen	S 13 1/2 W	313 links
12" Aspen	N 37 1/2 E	206 links

Undated Roll E-3 of the MN/DOT Highway Alignment Plans for TH 10 note the corner is assumed to be at the intersection of a north/south road and a fence line east, which is approximately 25 feet east of the center of the northbound lane.

Paul Wellen's, LS 10461, records give distances of 2679.10 feet to the SE corner and 2897.20 feet to the NE corner with a deflection angle of 2-17-23 right (south to north).

2002 No resurvey information was found on this corner in the Benton County records.

2008 The County Surveyor's Office searched and found a 1½ inch open iron pipe at 26± feet east of the centerline of north-bound Trunk Highway No. 10 and on line with an east fence line. The position lies 2.82 feet west and 6.98 feet south of a lost position. The position gives distances to the NE Cor. and SE Cor. of 2898.28 feet and 2678.99 feet respectively, which agrees well with Wellen's record to the SE Cor. and differs by 1.08 feet to the NE Cor. Surveyor accepts the iron pipe as best evidence and updated ties.

County Coordinates obtained by GPS to 1½" open iron pipe
 NAD 83 (1996 Adjustment)
 N-129253.933
 E-467871.103