

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:59PM


Signed: BW
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 11, Township 36N, Range 31W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11/20/08 found a CAST IRON MONUMENT DOWN 0.3'
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

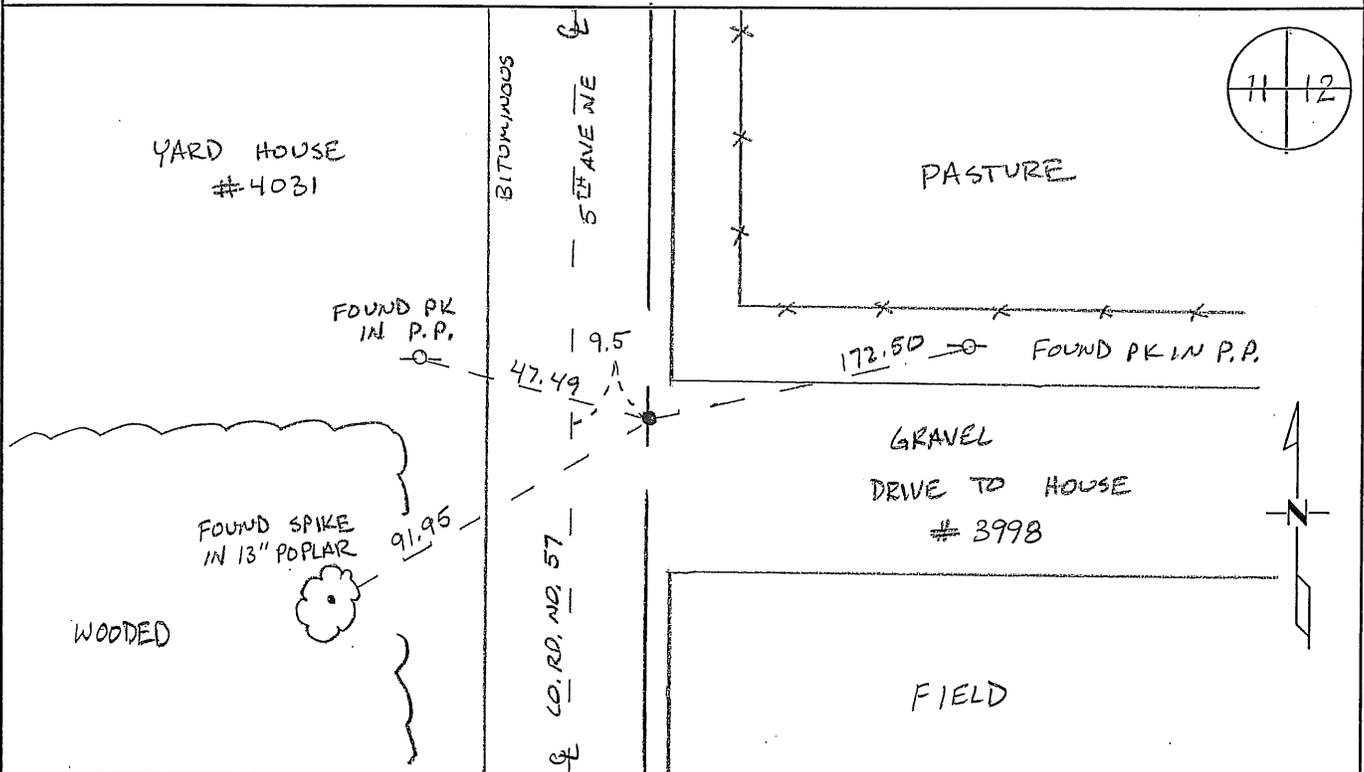

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature M. L. Linn
Deputy Benton County Surveyor
License No. 46170

Date: 12/12/08

PAGE 1 OF 2

Benton County Surveyor's Office
 Nancy H. Lewis, Deputy County Surveyor
 Minnesota License No. 46170

Statement of Evidence:

M113

East Quarter Corner of Section 11, Township 36 North, Range 31 West, Sauk Rapids Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original U.S. General Land Office survey established this corner and set a wood post at this location with bearing trees recorded:
 20" Black Oak N 81 1/2 E 159 links
- 1984 William Lunser, LS 9394, set a cast iron monument on a line between the NW and the SW corners of Section 12 and equal distances from each and filed a Certificate of Location (#173421).
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2003 Linda Brown, LS 23682, found CIM and obtained County Coordinates by traverse:
 NAD 83 (1996 Adjustment)
 N- 123842.691
 E- 473277.016
- 2008 The County Surveyor's Office searched and found a cast iron monument 9.5± feet east of the centerline of a north-south road (County Road No. 57) and 6± feet north of the centerline of an east gravel driveway. The position gives distances from the NE Cor. and the SE Cor. of 2658.11 feet and 2657.96 feet and is on a straight line between said corners, which agrees with Lunser's 1984 report. Position agrees with long standing surrounding occupation. Surveyor accepts the CIM as best evidence of obliterated corner and updated ties.


County Coordinates obtained by GPS (CIM)
 NAD 83 (1996 Adjustment)
 N-123842.582
 E-473277.167

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21st day of May, 1984
 I did set the East Quarter corner of Section 11,
 Twp. 36, Rg. 31, Benton County, Minnesota, which
 was evidenced by placed Quarter corner on a line between
the northwest and southwest corners of
Section 12 and at equal distances from each.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of cast iron monument and that
 I did establish witness or reference monuments as shown below:

DEME
 NESE
 ||
 SW NW
 NW SW
 12
 36-31

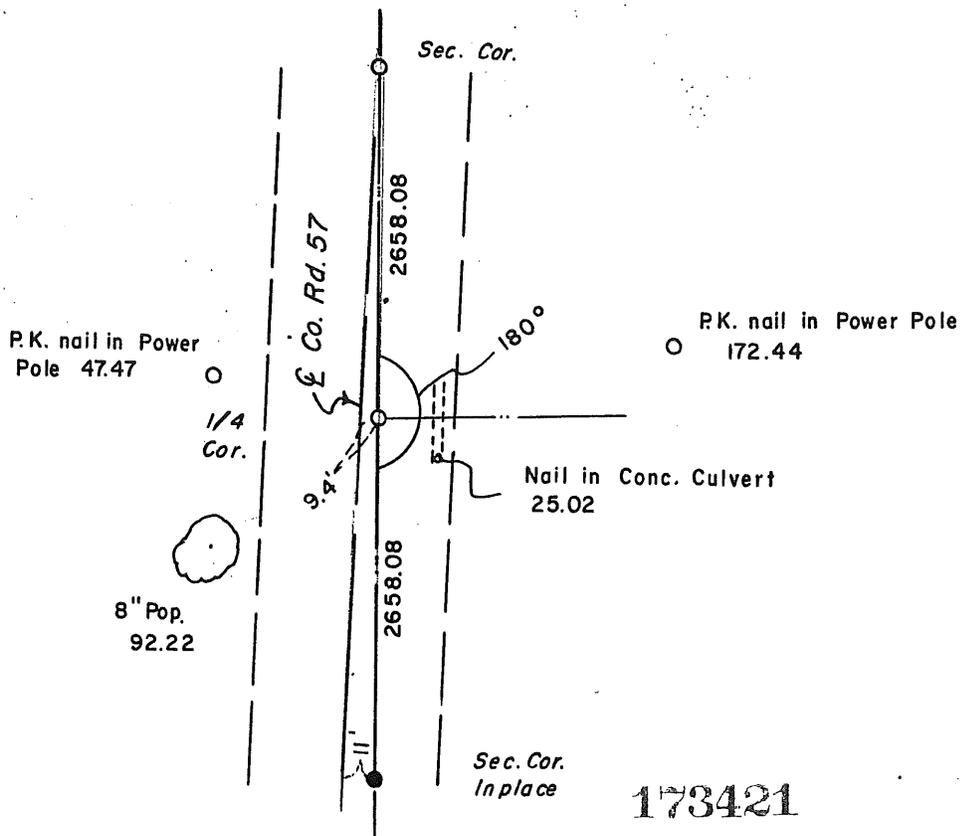

173421

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William J. Linn

Minn. Registration No. 9394

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 16th day of May, 1985 at 11:00 AM

Alice C. Engelmeier
 County Recorder

By _____ Deputy.