

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 14, Township 36N, Range 31W, 4th P.M.
STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 11/21/1990 found a 3/4" iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

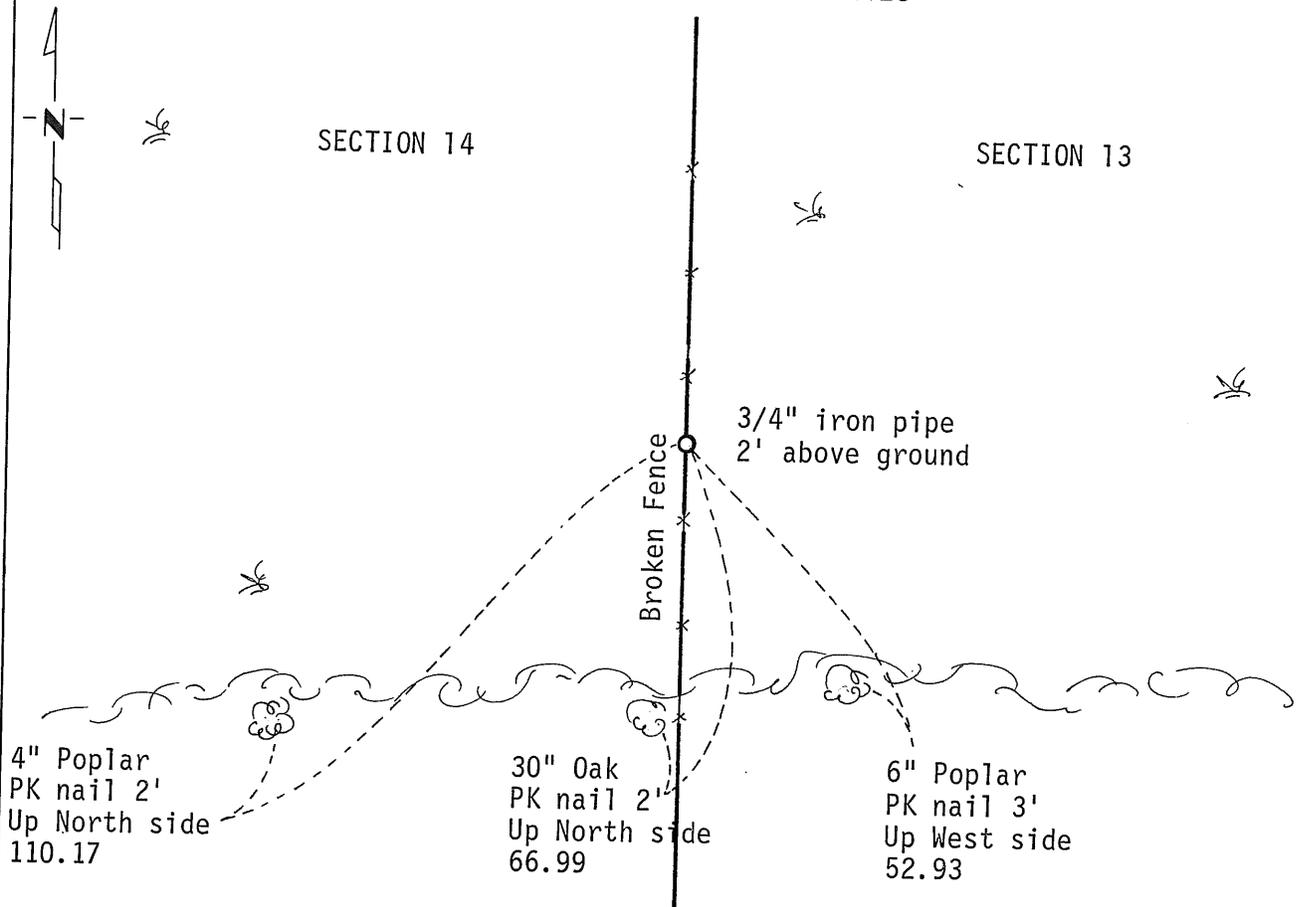

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 8/2/93
SIGNATURE DATE

Registration No. 11865

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner
Section 14, Township 36 North, Range 31 West

On 11/21/1990 Mn/DOT recovered the 3/4-inch pipe and reference ties as per the Certificate of Location of Government Corner filed at the Benton County Highway Department and cosigned by Paul E. Wellen and William F. Lunser, registered land surveyors. Mn/DOT also recovered a Benton County cast iron monument set at a lost location 16 feet south and four feet west of the 3/4-inch pipe. Sidney Williamson, registered land surveyor, set the cast iron monument and filed a Certificate of Location of Government Corner at the Benton County Highway Department. Mn/DOT reviewed the certificate and talked to the land surveyors about their locations. Because of the evidence stated on the certificate filed by Mr. Wellan and Mr. Lunser, Mn/DOT accepts the 3/4-inch pipe as the correct location for the corner.

For details and survey analysis contact the Mn/DOT Surveys Office in Baxter.

216780

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

AUG 3 4 10 PM '93

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST 1/4 Corner of Section 14, Township 36, Range 31, 4 P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On _____ found a 3/4" IRON PIPE
DATE _____
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE _____

SKETCH OF REFERENCE TIES

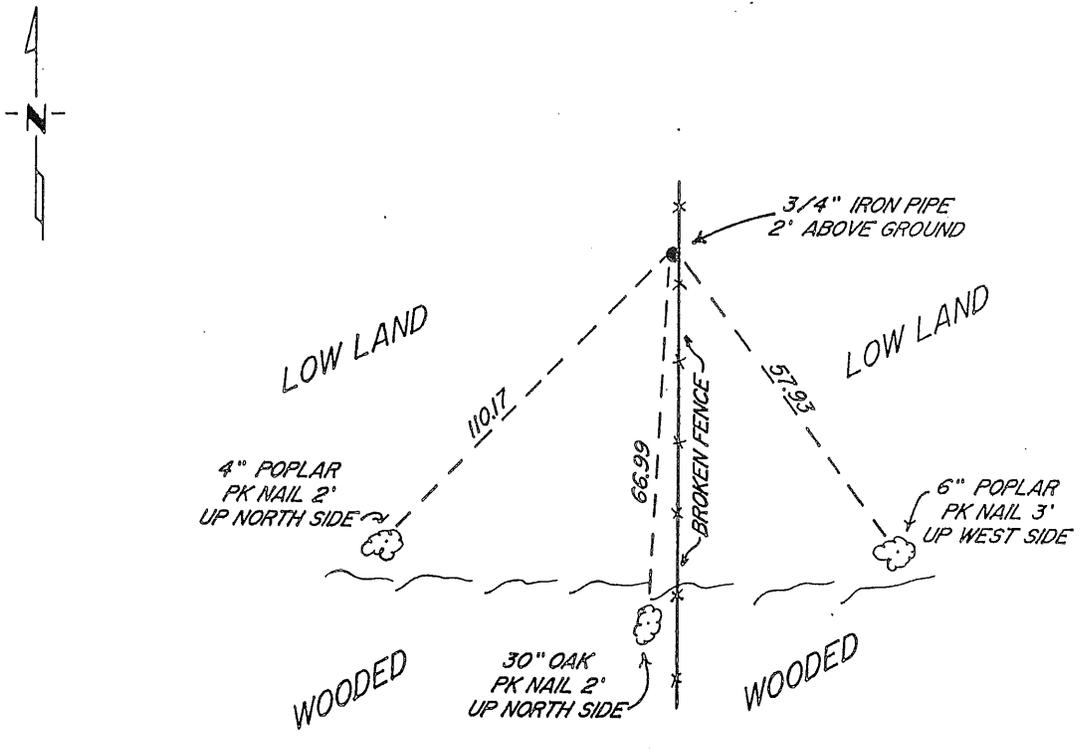

Statement of evidence relative to this corner location is on back of page. 201475

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 1/31/91
SIGNATURE DATE

REGISTRATION NO. 10461 LAND SURVEYOR

[Signature] 1/31/91
SIGNATURE DATE

REGISTRATION NO. 9394 LAND SURVEYOR

OFFICE OF THE COUNTY RECORDER
County of Benton

I hereby certify that this document was filed in the Co. Recorders office at 8²³ A.M. on the 25 day of February A.D., 19 91

County Recorder Alice C. Engelmeyer

By Jw, Deputy

DOCUMENT NO. 201475

Statement of Evidence:

East Quarter, of Section 14, T 36 N,
R 31 W, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1850, Mr. John Ryan, a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no further information for the location of this corner.
3. According to the records of M. B. Lang, a Licensed Land Surveyor, in July 1948, made a survey using this corner. He did not indicate what type of monumentation was at this corner. The records of M. B. Lang, Licensed Land Surveyor, are now owned by Milner W. Carley and Associates, Inc.
4. According to the records of M. B. Lang, a Licensed Land Surveyor, in September 1951, used this corner in a survey he made in Section 14. Again, he did not indicate what type of monumentation was at this corner, but his certificate of survey indicates a small circle at this corner. The combined distances, between the northeast corner and east 1/4 corner of his 1948 and 1951 surveys total 2,653.3 feet. The records of M. B. Lang, Licensed Land Surveyor, are now owned by Milner W. Carley and Associates, Inc.
5. On July 30, 1976, Paul E. Wellen, found a 3/4 inch iron pipe on a north-south fence line, at a distance of 2,651.68 feet south of the northeast corner of said Section 14. Accepting this iron pipe as the east 1/4 corner of said Section 14, Paul E. Wellen made a survey in said Section 14. Paul E. Wellen also used this corner to make surveys in said Section 14 on: October 25, 1976, December 20, 1976, May 3, 1984 and August 8, 1990. Paul E. Wellen also used this corner to make a survey in Section 13, T36N, R31W, on July 22, 1988.
6. On August 20, 1981, Milner W. Carley & Associates, Inc. used this corner to make a survey in Section 13, T36N, R31W.
7. On June 5, 1982, Betram-Regan, Land Surveyors, used this corner to make a survey in Section 14, T36N, R31W. On November 11, 1984, Betram-Regan Land Surveyors, used this corner to support District Court Case Number C-82-18, dated, October 19, 1984, of the Seventh Judicial District.
8. In May of 1985, William F. Lunser, Licensed Land Surveyor, used this corner to make a survey in said Section 14.
9. On May 4, 1990, David P. Regan, Licensed Land Surveyor, used this corner to make a survey in Section 13, T36N, R31W.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 14, Township 36, Range 31, _____ P.M.
STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 4-5-90 placed a CAST IRON MONUMENT
DATE WITH WITNESS POST

SKETCH OF REFERENCE TIES

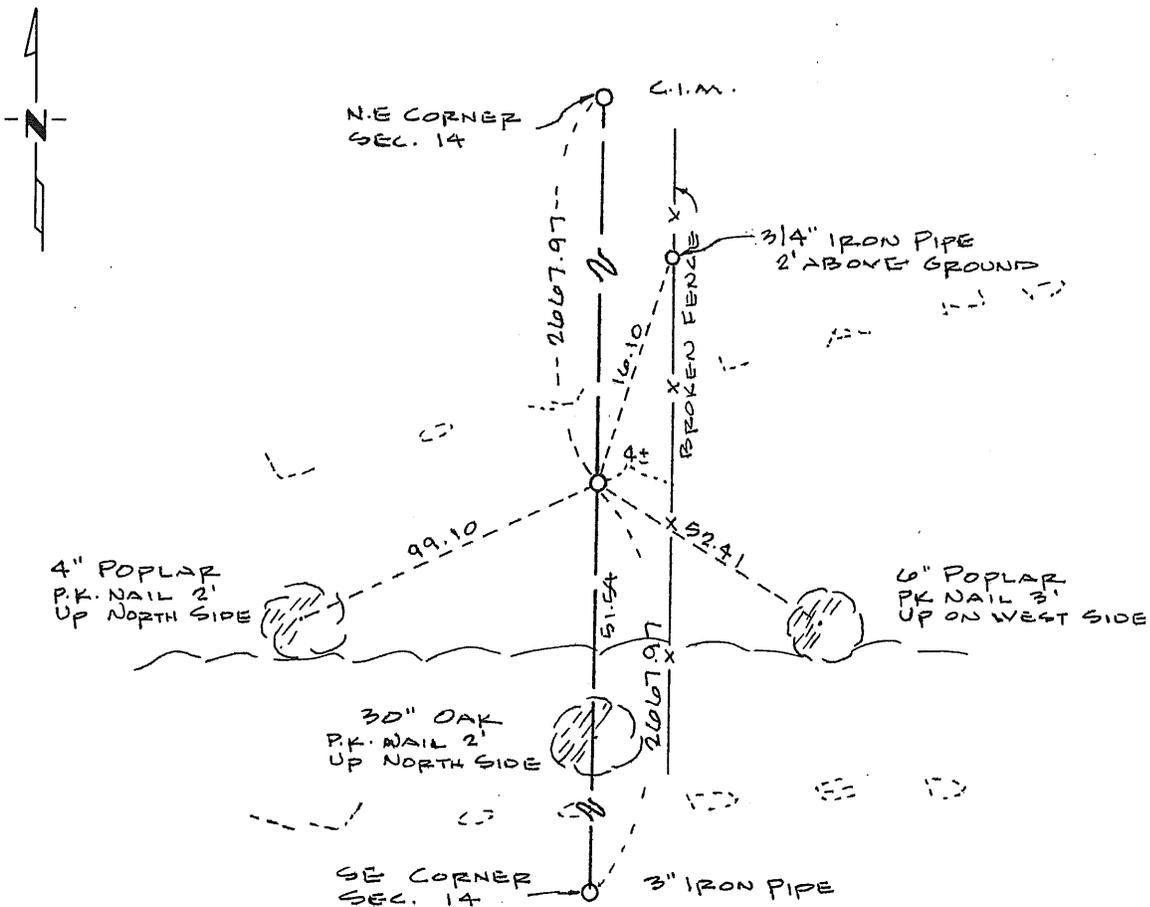

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 11/9/90
SIGNATURE DATE

Registration No. 10918

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. Post set by U.S. Government Survey in 1855.
2. No record of corner in Survey Books in Benton County Highway Dept.
3. On April 5, 1990 set a Benton County Cast Iron Monument on single proportionate measurement between the northeast corner and the southeast corner of Section 14.

200220

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

Nov 14 10 42 AM '90

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *Jed* DEPUTY+