

MARILYN J. NOVAK
COUNTY RECORDER

BY bn DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

301504

2003 JUN 25 P 1:49

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 23, Township 36, Range 31


4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 4/23/03 found a 4" X 4" STONE MONUMENT - DISTURBED
DATE

left monument as found lowered monument removed monument (explain)

On 5/22/03 placed a CAST IRON MONUMENT FROM 1972 TIES
DATE

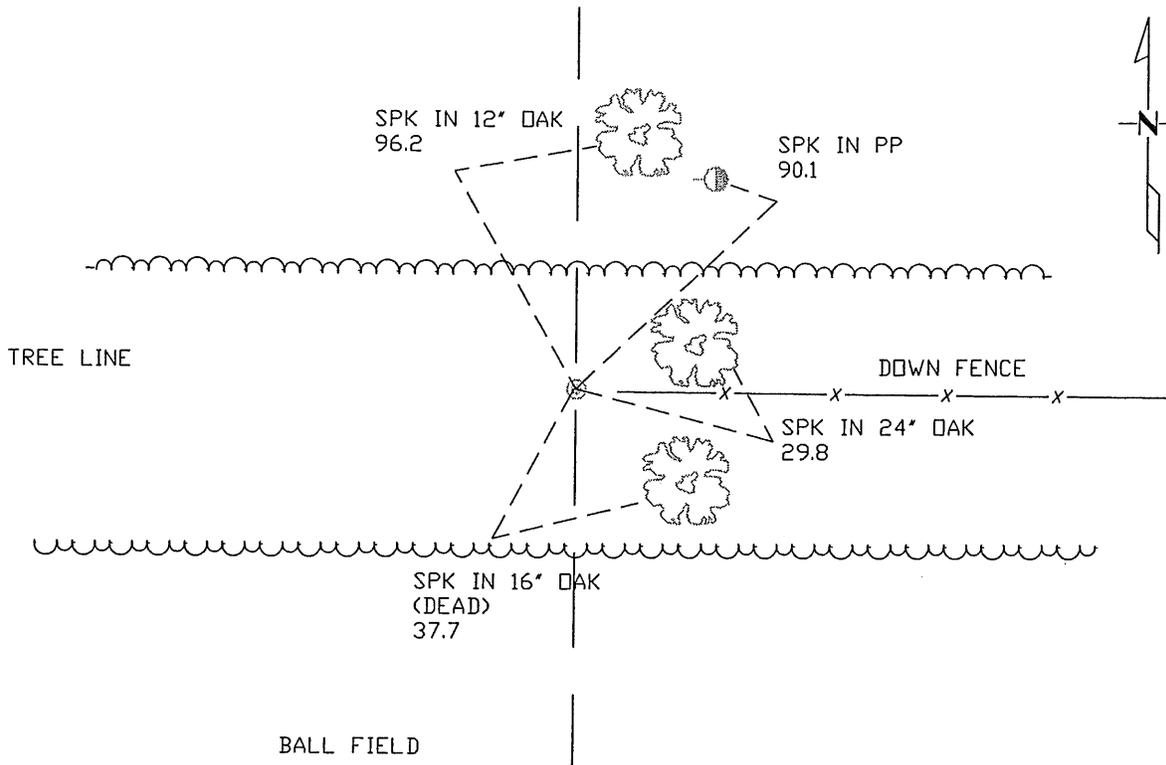

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 5/23/03 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

M233


The East Quarter Corner of Section 23, Township 36 North, Range 31 West, Sauk Rapids Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post for this location and bearing trees were recorded.
14" Bur Oak N 4 1/2 W 262 links
- 1972 William Lunser, LS 9394, found a stone monument with an iron beside the stone and filed a Certificate of Location (#133435). He notes a fence corner is 3.0' east and 1.0' south.
- 2003 Found the stone with busted off iron T-post by it. The stone had been disturbed and we set a cast iron monument from Lunser's ties.
County Coordinates obtained by side-tie from GPS points
NAD 83 (1996 Adjustment)
N- 113219.506
E- 473512.348

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 4th day of February, 1972
I did find _____ the East Quarter corner of Section 23,
Twp. 36, Rg. 31, Benton County, Minnesota, which
was evidenced by a stone monument found in place

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of _____ left as it was _____ and that
I did establish witness or reference monuments as shown below:

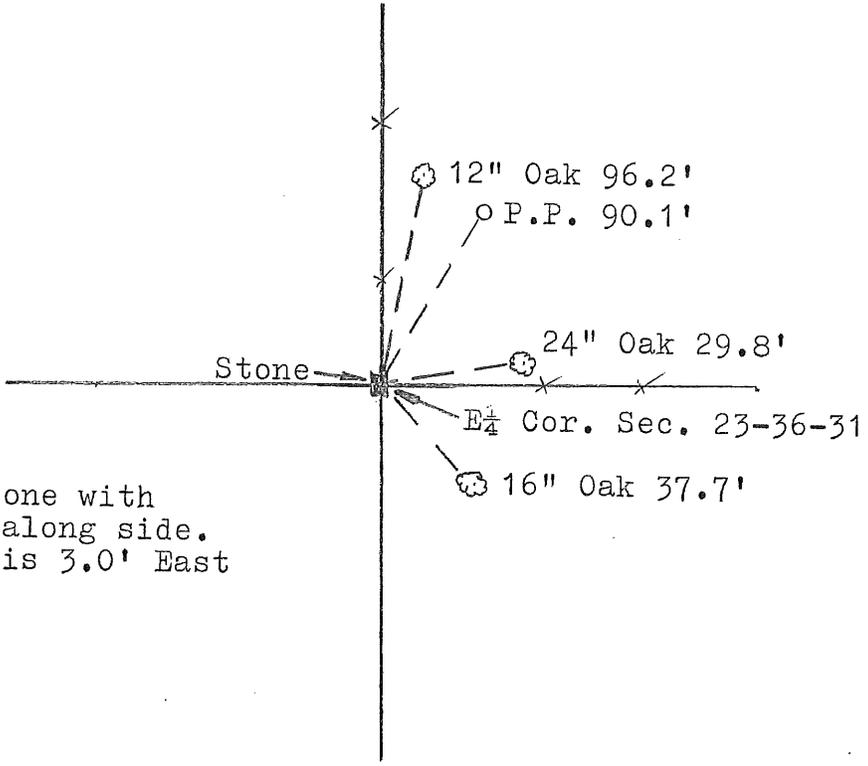

Note: Found stone with
an iron pipe along side.
Fence corner is 3.0' East
& 1.0' South.

133435

I hereby certify that the
above is true and correct
and that I am a registered
Land Surveyor under the laws
of the State of Minnesota.

William F. Jones

Minn. Registration No. 9394

Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within
instrument was filed for record
in this office on the 9th day of
February, 1973.

J. A. Johnson
Register of Deeds

By Marilee Novak Deputy.