

Certified, Filed and or Recorded on
Mar. 10, 2009 AT 01:05PM

Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 12, Township 36, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-25-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

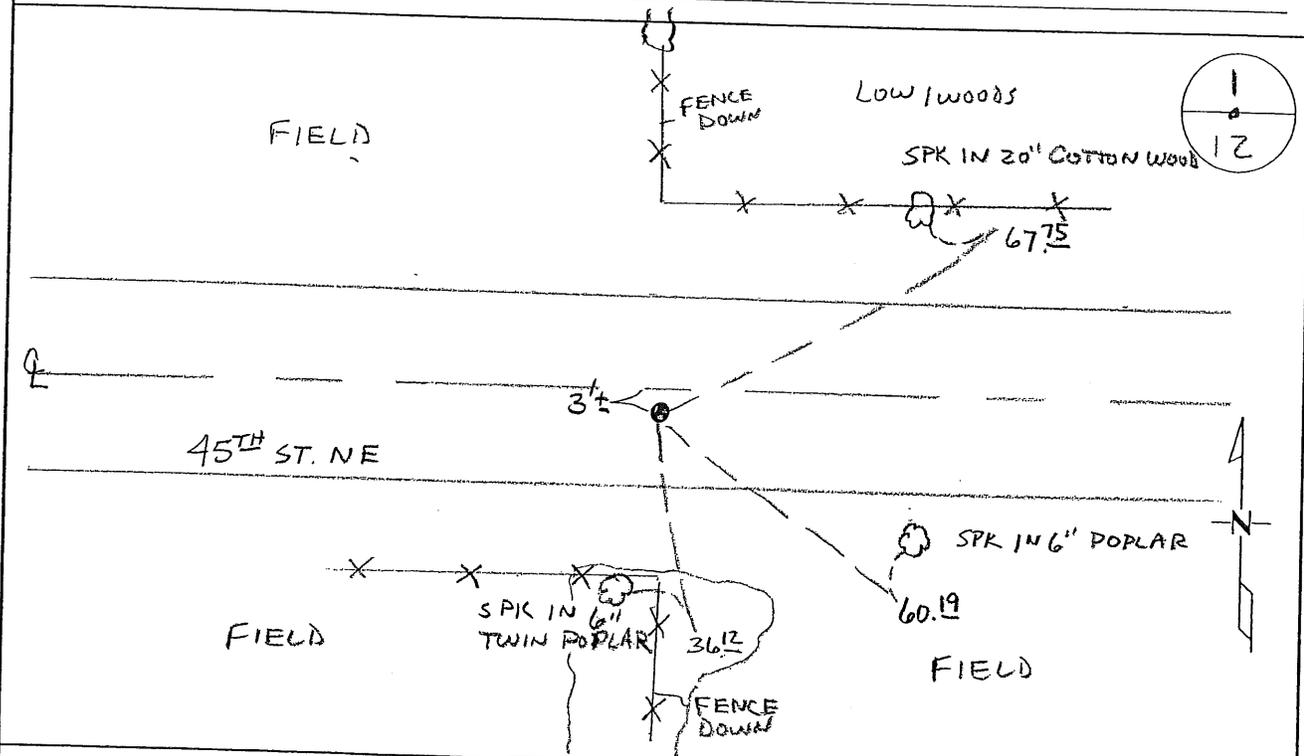

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature *Chris Hoglund*
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Benton County Surveyor's Office
Chris Hoglund, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:

M121

North Quarter Corner of Section 12, Township 36 North, Range 31 West, Sauk Rapids Township, 4th Principal Meridian, Benton County, Minnesota.


- 1850 Original US General Land Office survey set a wood post for this location and bearing trees were recorded.
14" Aspen S 58 E 52 links
- 1985 William Lunser, LS 9394, set a cast iron monument at the intersection of a fence line north/south and on line between the NE and the NW Cor. of Section 12. He filed a Certificate of Location (#173422). He also notes the distance to the NW Corner of Sec. 12 is 2679.51 feet and the distance to the NE Corner of Sec. 12 is 2694.25 feet.
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2004 County Coordinates from SEPI to CIM by traverse:
NAD 83 (1996 Adjustment)
N- 126534.425
E- 475904.180
- 2008 Westwood Professional Services, Inc. found a cast iron monument ~3 feet south of the centerline of the township road and in line with fence lines north and south. CIM fits 1985 Lunser ties and we measured 2679.55 feet to the NW corner and 2694.29 feet to the NE corner which agrees with Lunser measurements. CIM is accepted as marking the obliterated position for this corner.
County Coordinates obtained by GPS coincide with 2004 SEPI position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21st day of May, 1985
 I did set the North Quarter corner of Section 12,
Twp. 36, Rg. 31, Benton County, Minnesota, which
 was evidenced by A fence line of North and South directions
and on line between the northeast and
northwest corners of Section 12.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of cast iron monument and that
 I did establish witness or reference monuments as shown below:

*W. L. W.
 S. E. H.
 1
 N. E. W.
 N. W. N. E.
 12
 36-31*

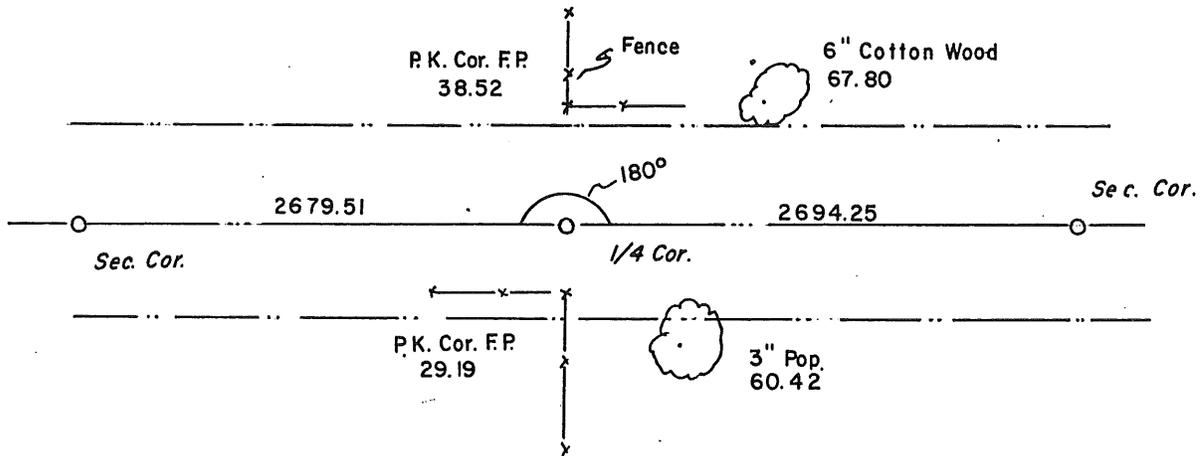

173422

I hereby certify that the
 above is true and correct
 and that I am a registered
 Land Surveyor under the laws
 of the State of Minnesota.

William J. Larson

Minn. Registration No. 9394

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within
 instrument was filed for record
 in this office on the 16th day of
May, 1985 at 11:00 AM

Alice R. Engelmeier
 County Recorder

By _____ Deputy.