

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:59PM


Signed: BW
MARILYN J NOVAK G V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 15, Township 36N, Range 31W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11/26/08 found a CAST IRON MONUMENT DOWN 0.2'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

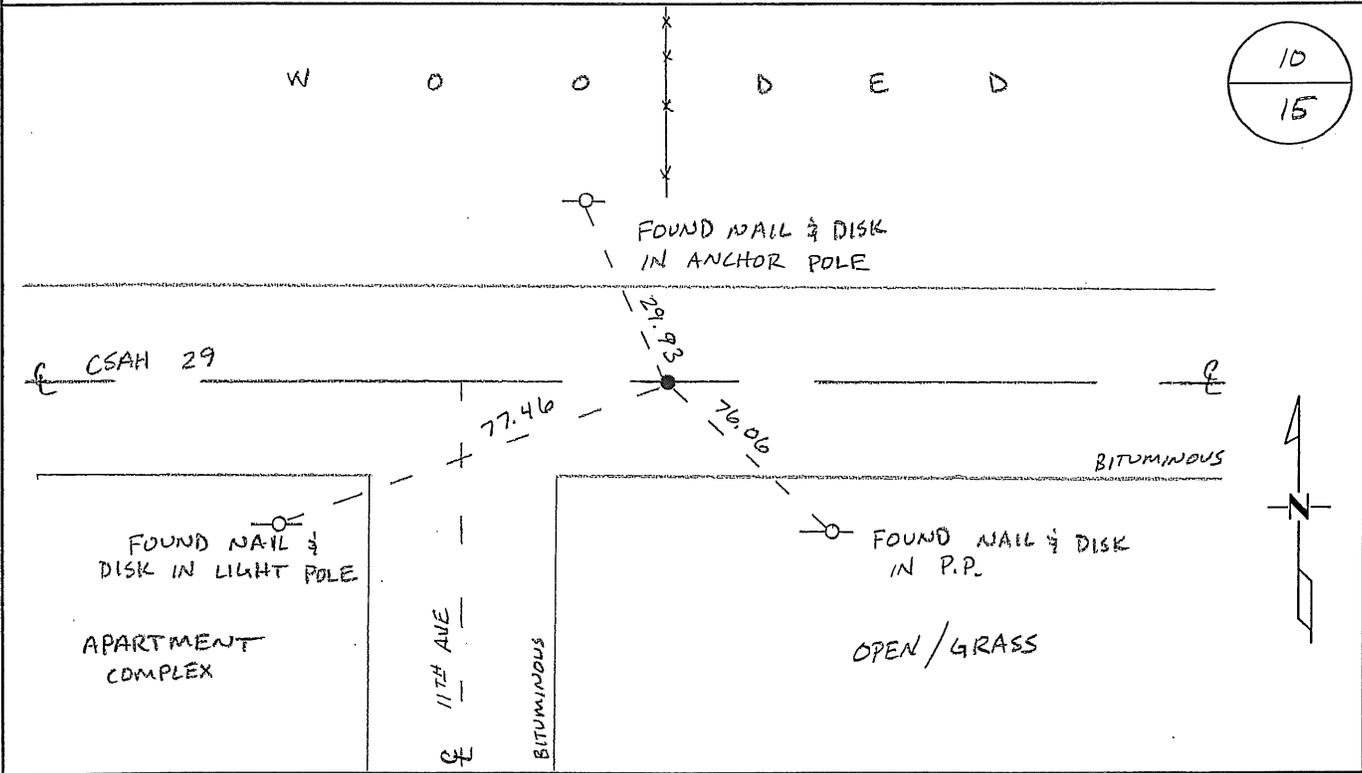

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature M. L. Linn
Deputy Benton County Surveyor
License No. 46170

Date: 12/12/08

Benton County Surveyor's Office
 Nancy H. Lewis, Deputy County Surveyor
 Minnesota License No. 46170

Statement of Evidence:

M151

North Quarter Corner of Section 15, Township 36 North, Range 31 West, Sauk Rapids Township, 4th Principal Meridian, Benton County, Minnesota.

1850 Original US General Land Office survey set a wood post for this corner and bearing trees were recorded.

5" Black Oak	S 27 1/2 W	17 links
5" Black Oak	N 39 1/2 E	11 links

This corner is noted on the following recorded plats:

<i>BRIERWOOD</i>	8/26/1988	Sidney Williamson
<i>FIELDCREST ESTATES</i>	3/20/1997	Linda H. Brown
<i>GRANITE CITY MOVING AND STORAGE</i>	7/13/2000	Linda H. Brown
<i>GRANITE CITY MOVING AND STORAGE PLAT 2</i>	7/27/2000	Linda H. Brown
<i>COUNTRY ACRES</i>	4/5/1988	Sidney Williamson
<i>COUNTRY ACRES PLAT 2</i>	11/1/1988	Sidney Williamson
<i>COUNTRY ACRES PLAT 3</i>	2/1/1990	Bruce Skipton
<i>EASTERN TERRACE (CIM)</i>	6/6/1984	Paul E. Wellen
<i>SARTELL INDUSTRIES EAST</i>	4/24/1992	Sidney Williamson

1982 David P. Regan, LS 12236, found a RR Spike 9 feet north of the centerline of County Road 29 (running east and west) and a fence line from the north. He replaced it with a cast iron monument at the location and file a Certificate of Location (#163376)

1989 Benton County moved County Road 29 north, 9 feet, to the section line and placed a cast iron monument at the location of the RR Spike.

1989 Paul Wellen, LS 10461, notes a cast iron monument at the corner location.

1991 James W. Nielsen, LS 11865, found the cast iron monument and one of Regan's ties. He notes the monument is 0.92 feet west of a lost position and files Certificate of Location (Doc. No. 216783).

1993 MN/DOT Road Right of Way Plat 05-12 shows a CIM at corner.

2001 Westwood Professional Services, Inc. found a PK at the intersection of County Road 29 (running east and west) and 50 feet East of 11th Avenue E (running south).
 County Coordinates Obtained by GPS (PK)
 NAD 83 (1996 Adjustment)
 N- 121193.078
 E- 465288.730

2008 The County Surveyor's Office searched and found a cast iron monument at the centerline of an east-west road (C.S.A.H. No. 29) and on line with a north fence line. The position gives distances to the NW Cor. and NE Cor. of 2653.84 feet and 2655.66 feet, which agrees well with the 1993 MN/DOT Plat 05-12 and existing occupation. Surveyor accepts the CIM as marking the corner position. Ties were updated.

County Coordinates Obtained by GPS (CIM)
 NAD 83 (1996 Adjustment)
 N- 121193.118
 E- 465288.908

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter _____ Corner of Section 15, Township 36N, Range 31W, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 12/14/1991 found a Benton County cast iron monument
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES SECTION 10

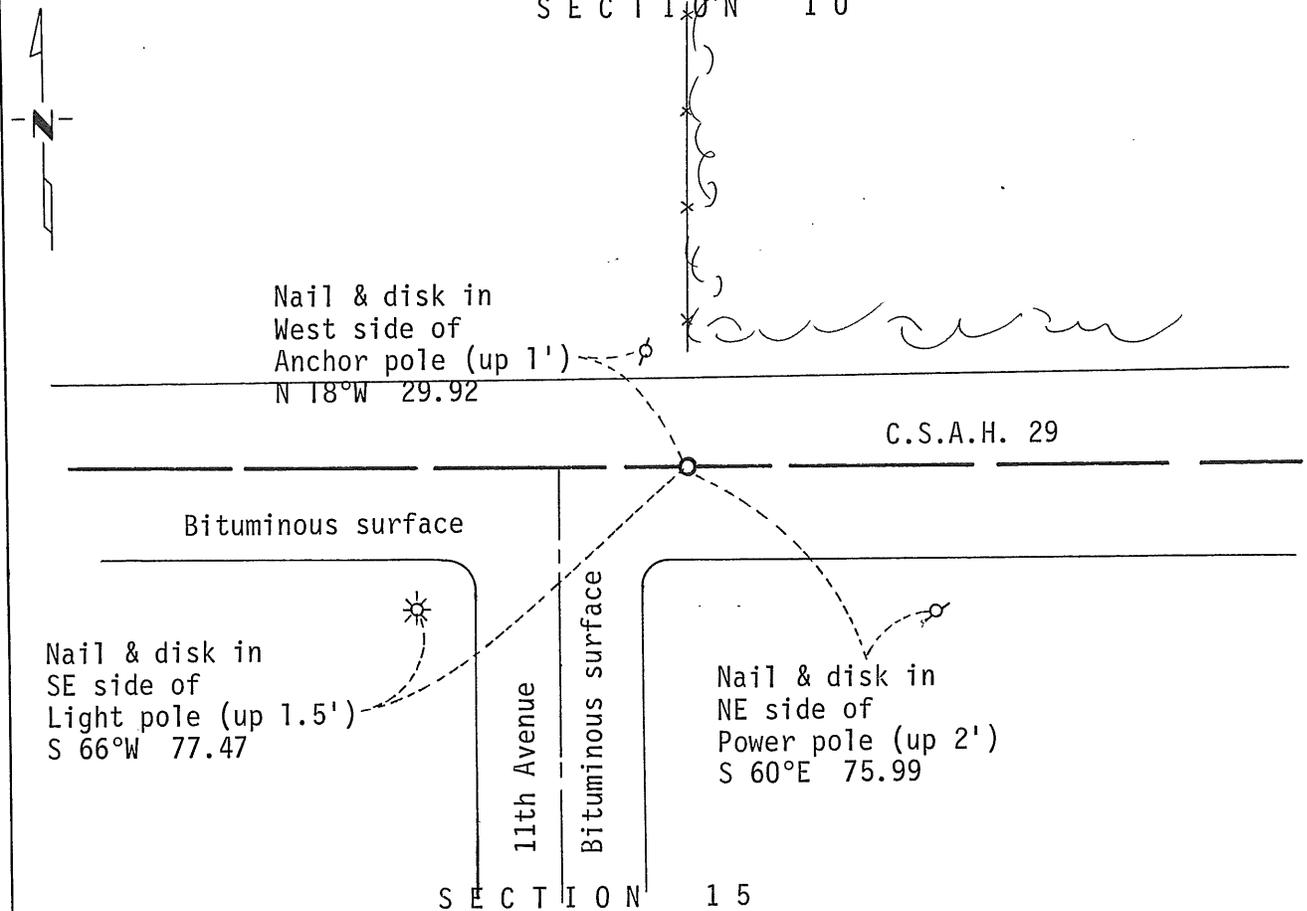

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen SIGNATURE 8/2/93 DATE

Registration No. 11865

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence: North Quarter Corner
Section 15, Township 36 North, Range 31 West

The Original Government Survey was run in 1850 and a wood post was set to mark the corner.

No survey records were found at the Benton County Courthouse.

In 1982 Mr. David Regan, Registered Land Surveyor, found a railroad spike nine feet north of the center of CSAH 29 and on line with an old fence line north. Mr. Regan set a Benton County cast iron monument at the railroad spike location and filed a Certificate of Location of Government Corner at the County Highway Department.

In 1989 Benton County reconstructed County Road 29 and moved the highway nine feet north to the section line. Benton County Highway Department set a Benton County cast iron monument at the railroad spike location after the road construction was finished.

In 1991 the Minnesota Department of Transportation (Mn/DOT) recovered the cast iron monument and one of Mr. Regan's reference ties. This monument is 0.92 feet west of a lost location. This location has been used by the local surveyors and agrees with the old fence line occupation to the north. Mn/DOT accepts this monument as the correct location for the corner.

For details and survey analysis contact the Mn/DOT Surveys Office in Baxter.

216783

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

AUG 3 4 10 PM '93

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 15, Township 36, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

■ On 8/12/82 found a railroad spike 9 feet north of center line of
C.S.A.H. # 29

left monument as found, lowered monument, removed monument (explain)

■ On 8/12/82 placed a Benton County cast iron monument

SKETCH OF REFERENCE TIES

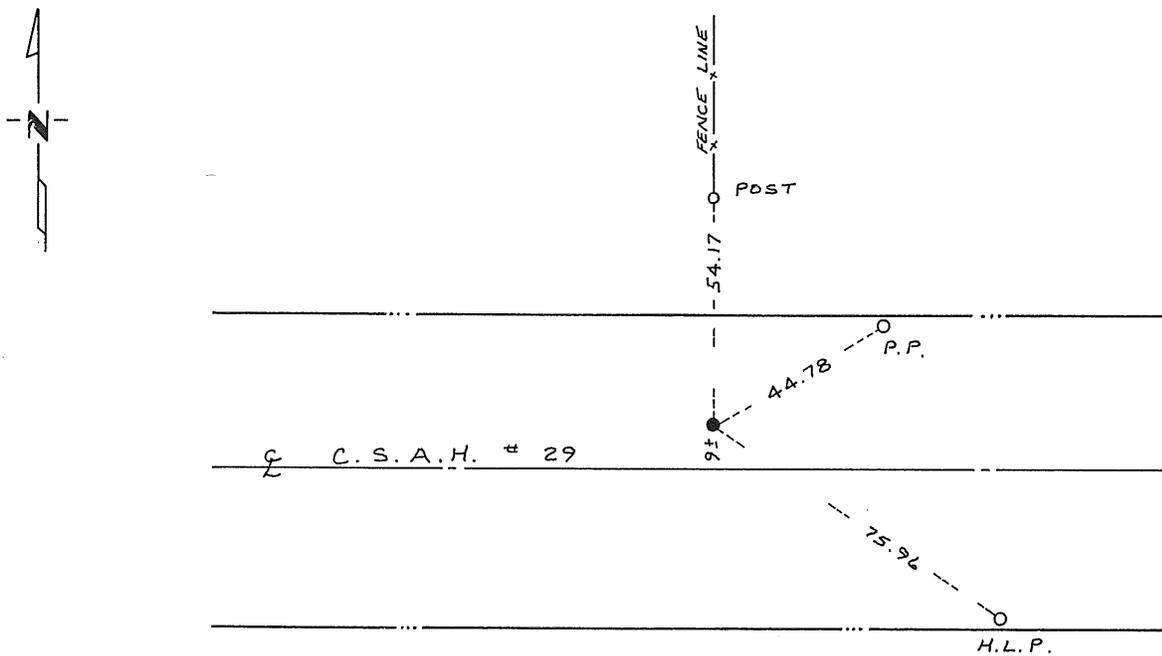

Statement of evidence relative to this corner location is on back of page. **163376**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Poun 9/1/82
SIGNATURE DATE

Registration No. 122/36

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 18th day of October A.D., 1982

County Recorder
Register of Deeds F.A. Johnson

By _____, Deputy

DOCUMENT NO. _____