

265887

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

MAY 5 8 19 AM '00


ALICE O. ENGELMANN
COUNTY RECORDER
BY *Alice O. Engelmann*

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 4, Township 36, Range 31
4th Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 1/6/99 found a BENTON COUNTY CAST IRON MONUMENT
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

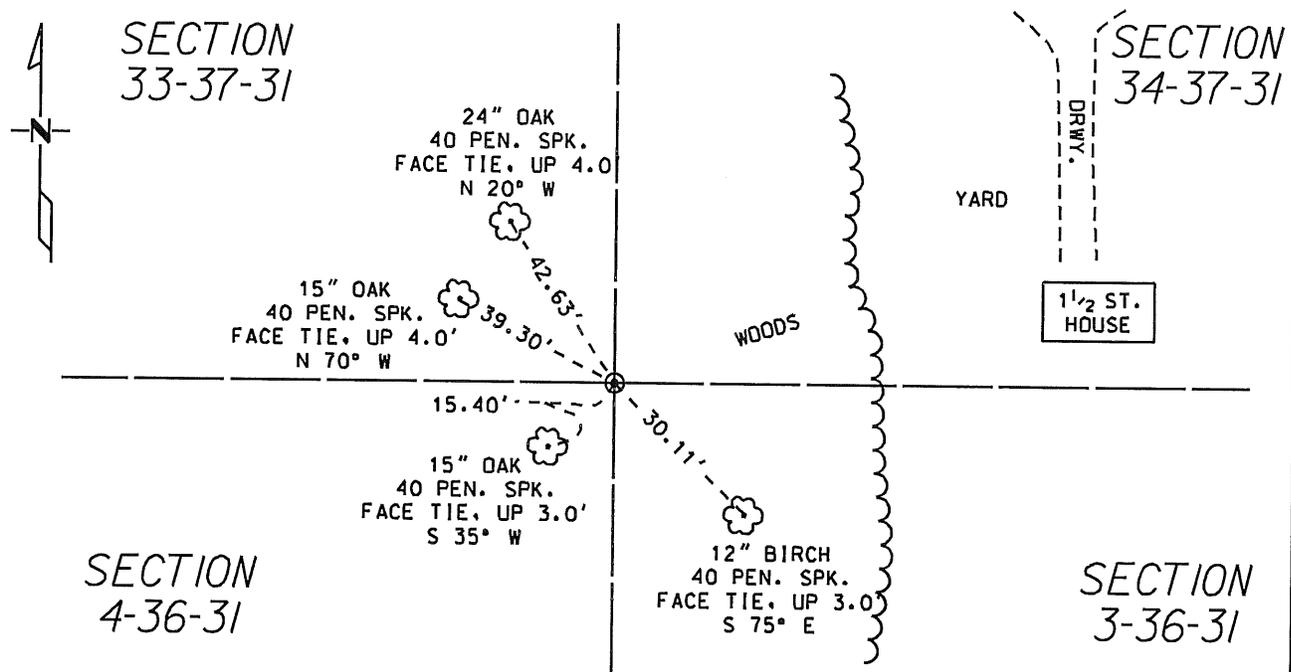

ALL DISTANCES ARE SLOPE CHAINED

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature *James Kramer* Date 4-5-2000 License No. 23668
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

Northeast Corner Section 4, Township 36 North, Range 31 West.

Theodore Conkey and John Ryan ran the original public land surveys in 1849 and 1850. A wood post was set to mark the corner. Bearing tree ties were made to three black oak trees, 4" to 6" in diameter and a 12" bur oak.

Records on file at the office of David P. Regan, RLS show the corner as being marked with a 3/4" iron pipe on June 5, 1981.

On May 17, 1989 William Lunser, RLS found a 3/4" pipe that corresponded with Regan's survey. A cast iron monument was placed at this time and a certificate filed as Doc. #195965.

On January 6, 1999 Mn/Dot survey crews found a Mn/DOT cast iron monument in accordance with Lunser's certificate. Ties to the monument were updated at this time. The Minnesota Department of Transportation accepts the position of the cast iron monument as the correct location for the corner.

For details and survey analysis, contact the Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 4, Township 36, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 5-17-1989 found a 3/4" iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On 5-17-1989 placed a Benton County Cast Iron Mon.
DATE

SKETCH OF REFERENCE TIES

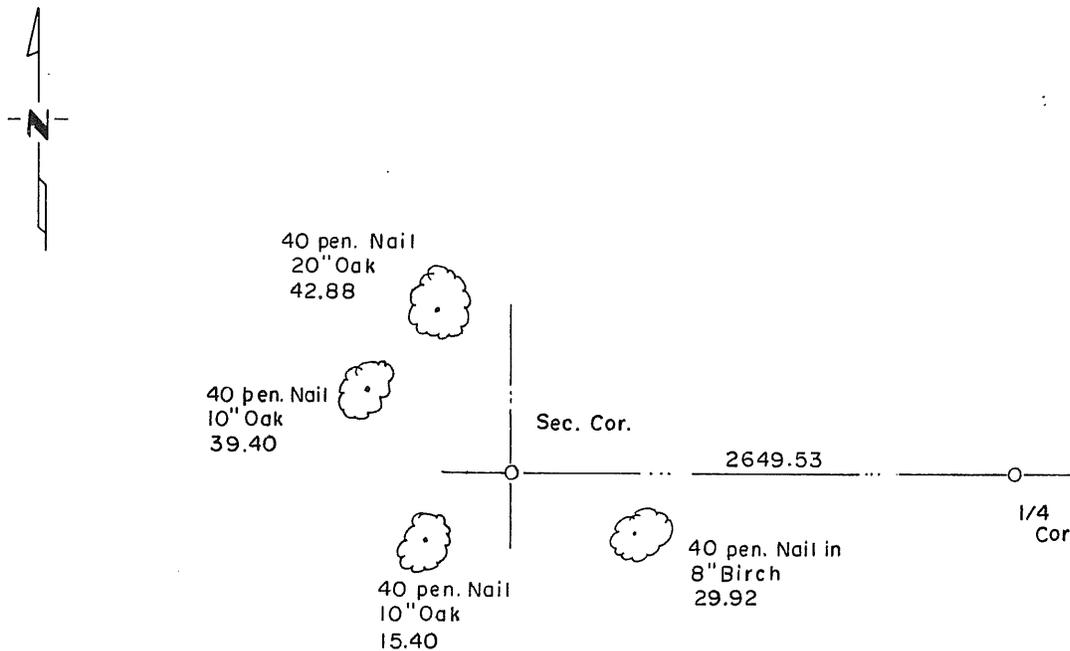

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lerner 11/5/30
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

In searching the recorders of Mr. David Regan, land surveyor, he found this corner being marked by a 3/4" pipe, dated 6-5-1981.

5-17-1989 Lunser Survey Co. found a 3/4" pipe and verified it's location with the survey done by Mr. Regan in 1981, and replaced with a cast iron mon.

1 9 5 9 6 5

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 11 8 36 AM '90

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Jew DEPUTY