

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 02:01PM


Signed: BW
MARILYN J NOVAK 6 V 7
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 36N, Range 31W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11/26/08 found a CAST IRON MONUMENT DOWN 0.4'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

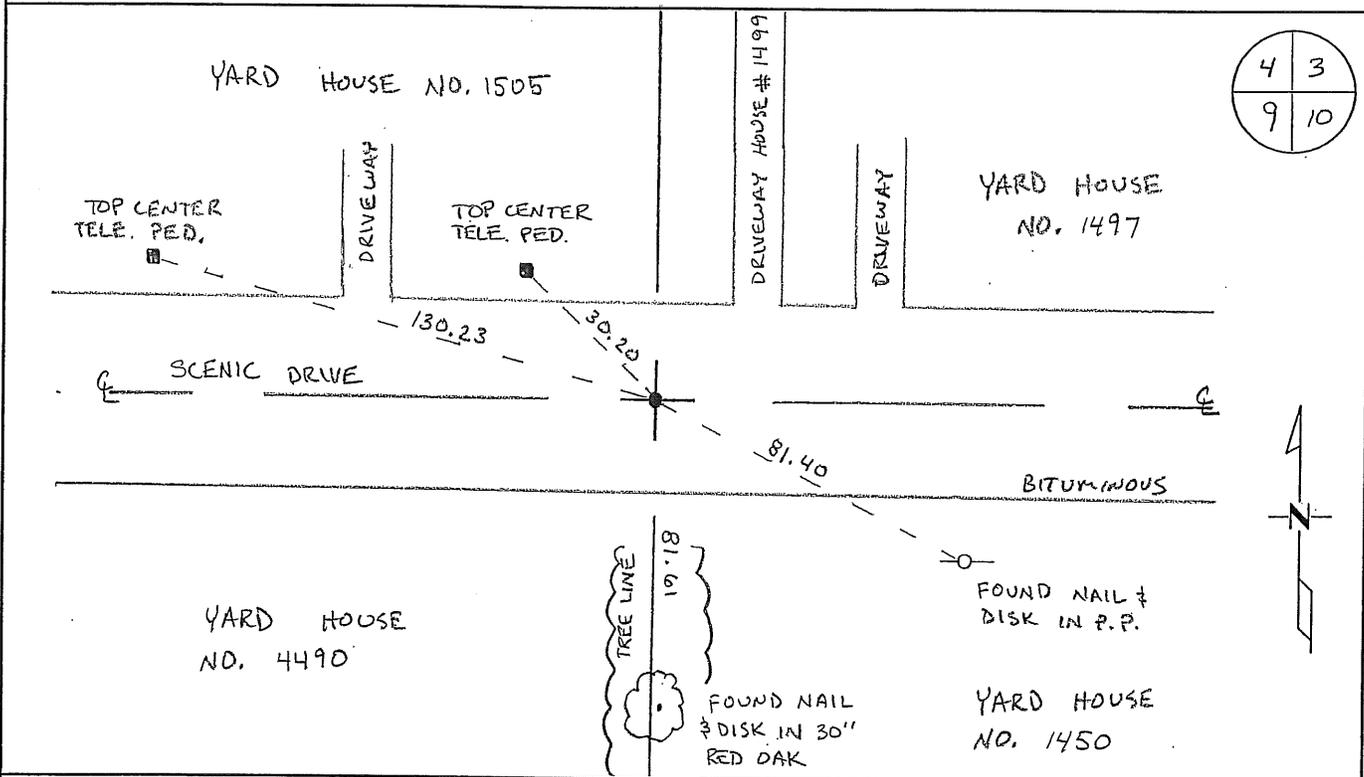

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature M. Lewis
Deputy Benton County Surveyor
License No. 46170

Date: 12/12/08

Benton County Surveyor's Office
 Nancy H. Lewis, Deputy County Surveyor
 Minnesota License No. 46170

Statement of Evidence:**M092**

Northeast Corner of Section 9, Township 36 North, Range 31 West, Sauk Rapids Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey established this corner and set a wood post at this location and bearing trees were recorded.
- | | |
|--------------|-----------------|
| 14" Burr Oak | N 45 W 19 links |
| 8" Blk Oak | S 60 W 61 links |

This corner is noted on the following recorded plats:

<i>CZECH ADDITION</i>	8/6/1975	Paul E. Wellen
<i>CZECH ADDITION PLAT 2</i>	8/13/1962	Milner W. Carley
<i>RANCH ACRES ESTATE</i>	2/13/1961	M.B. Lang
<i>THOUSAND OAKS</i>	9/20/1983	Paul E. Wellen
<i>THE TOWNSITE OF SARTELL</i>	5/24/1906	Samuel S Chute

- Undated MN/DOT road alignment for (old) TH 10 (Roll B-9) notes the corner is 981.1 feet from centerline.
- 1946 MN/DOT road alignment for TH 10 (Roll D-8) notes the corner is at the intersection of roads east/west and a fence line north/south. The corner is 1030.0 feet from centerline.
- 1968 County Highway: An iron pin was found at the corner location.
- 1974 County Highway: a cast iron monument was set at the location of a found iron pipe.
- 1975 M.W. Carley shows an iron at this corner.
- 1982 David Regan, LS 12236, found a 3/8" iron pipe in the centerline of an east/west road. He set a cast iron monument. A Certificate of Location (#163375) was filed.
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:
 N- 126581.387
 E- 462571.035
- 2003 County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 126581.479
 E- 462570.473
- 2008 The County Surveyor's Office searched and found a cast iron monument at the centerline of an east-west road (Scenic Drive). All four tie distances reported by Regan in 1982 agree well. The position gives a distance to the East 1/4 Cor. of 2749.61 feet. Surveyor accepts CIM and updated ties. The 2003 coordinates were verified.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 9, Township 36, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 8/12/82 found a 3/8 inch iron pipe in center line of east-west Township road
 - left monument as found, lowered monument, removed monument (explain)
- On 8/12/82 placed a Benton County cast iron monument over iron pipe

SKETCH OF REFERENCE TIES

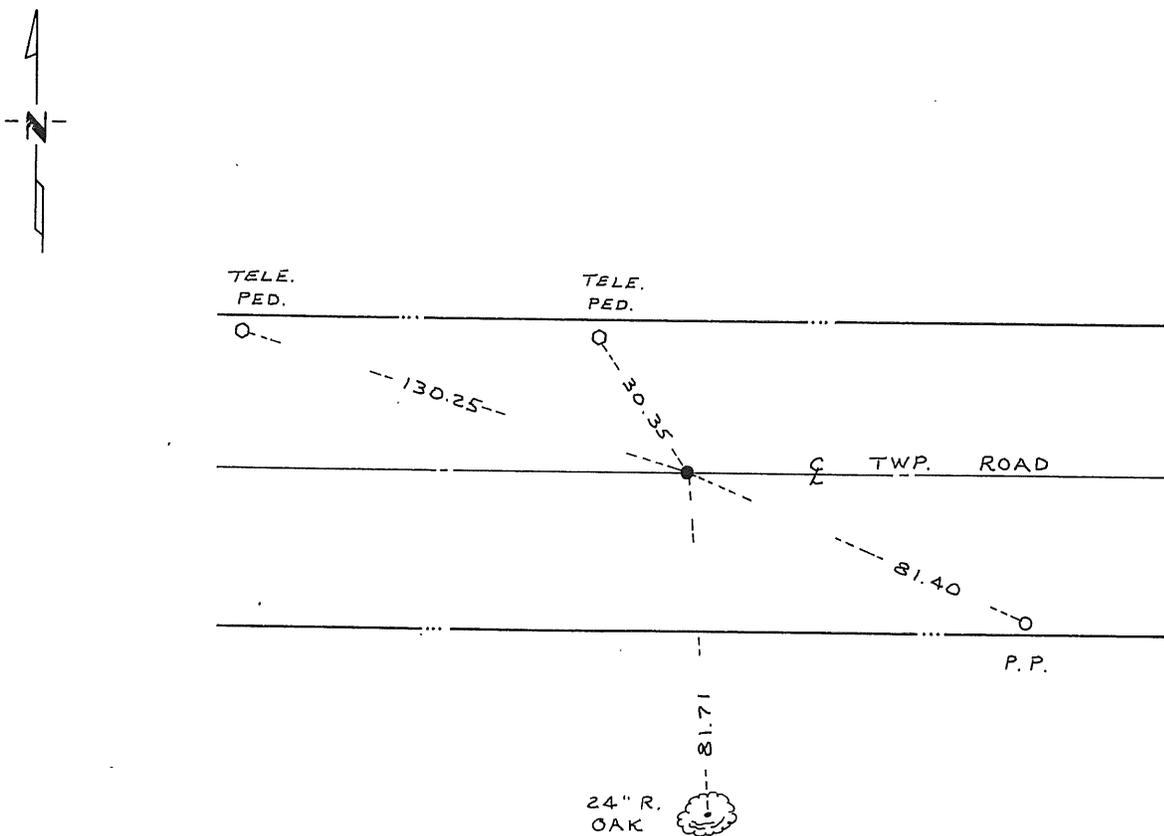

Statement of evidence relative to this corner location is on back of page. **163375**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Ryan 9/1/82
SIGNATURE DATE

Registration No. 121236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 18th day of October A.D., 1982

County Recorder
Register of Deeds F.A. Johnson
By _____, Deputy

DOCUMENT NO. _____