

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 02:00PM


Signed: BW
MARILYN J NOVAK 6 V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 11, Township 36N, Range 31W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11/20/08 found a CAST IRON MONUMENT DOWN 0.5'
- left monument as found lowered monument removed monument (explain)
- On 11/24/08 placed an PK NAIL WITH BENTON COUNTY SURVEYER DISK
FLUSH WITH ROAD SURFACE

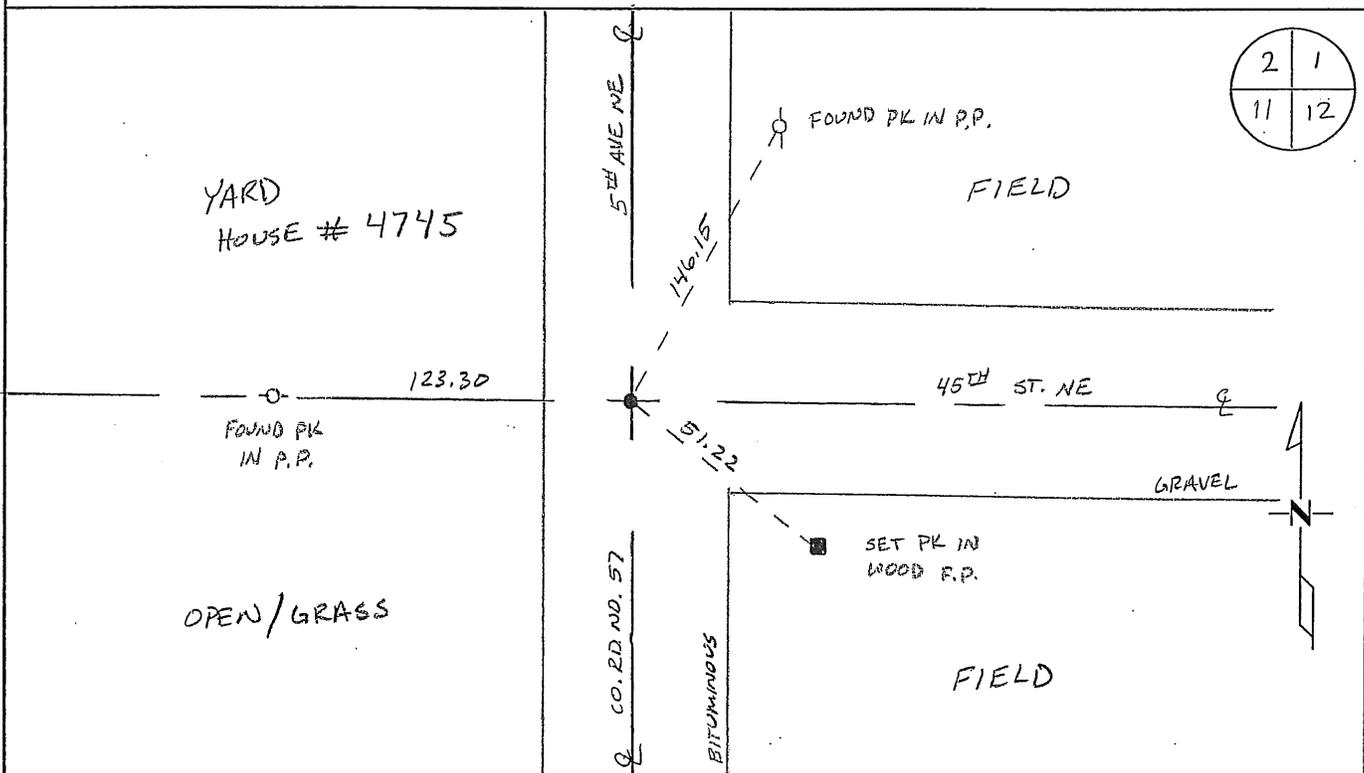

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature M. Lewis
Deputy Benton County Surveyor
License No. 46170

Date: 12/12/08

Benton County Surveyor's Office
 Nancy H. Lewis, Deputy County Surveyor
 Minnesota License No. 46170

Statement of Evidence:

M112

Northeast Corner of Section 11, Township 36 North, Range 31 West, Sauk Rapids Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey established this corner and set a wood post at this location and bearing trees were recorded.
 - 8" Aspen N 62 W 187 links
 - 8" Aspen S 89 W 205 links

- 1984 On May 21, 1984 William Lunser, LS 9394, found a 6"X6" granite monument in intersection of roads north, south, and east.. He set a cast iron monument at the corner location and filed a Certificate of Location (#173423), which shows distance to the North 1/4 Corner of Section 12 is 2679.51 feet and the distance to the East 1/4 Corner of Section 11 is 2658.08 feet.

- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:
 - N- 126500.078
 - E- 473225.470

- 2002 No resurvey information was found on this corner in the Benton County records.


- 2003 Westwood Professional Services, Inc. found a cast iron monument at the corner and located it using GPS.
 - County Coordinates obtained by GPS (Cast Iron Monument)
 - NAD 83 (1996 Adjustment)
 - N-126500.271
 - E-473224.850

- 2008 The County Surveyor's Office searched and found a cast iron monument at the intersection of a north-south road (County Road No. 57) and an east gravel road (45th Street N.E.). The position gives a distance to the East ¼ Cor. of 2658.11 feet and a distance to the North ¼ Cor. of Sec. 12 of 2679.54 feet with a deflection angle of 89-36-17 left (south to north), which agrees well with Lunser's 1984 report. Surveyor accepts CIM and set a PK nail with a Benton County Surveyor disk over the monument and updated ties.
 - County Coordinates obtained by GPS (PK nail)
 - NAD 83 (1996 Adjustment)
 - N-126500.182
 - E-473224.861

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21st day of May, 1984
I did find the northeast corner of Section 11,
Twp. 36, Rg. 31, Benton County, Minnesota, which
was evidenced by 6"x6" granite stone

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of cast iron monument and that
I did establish witness or reference monuments as shown below:

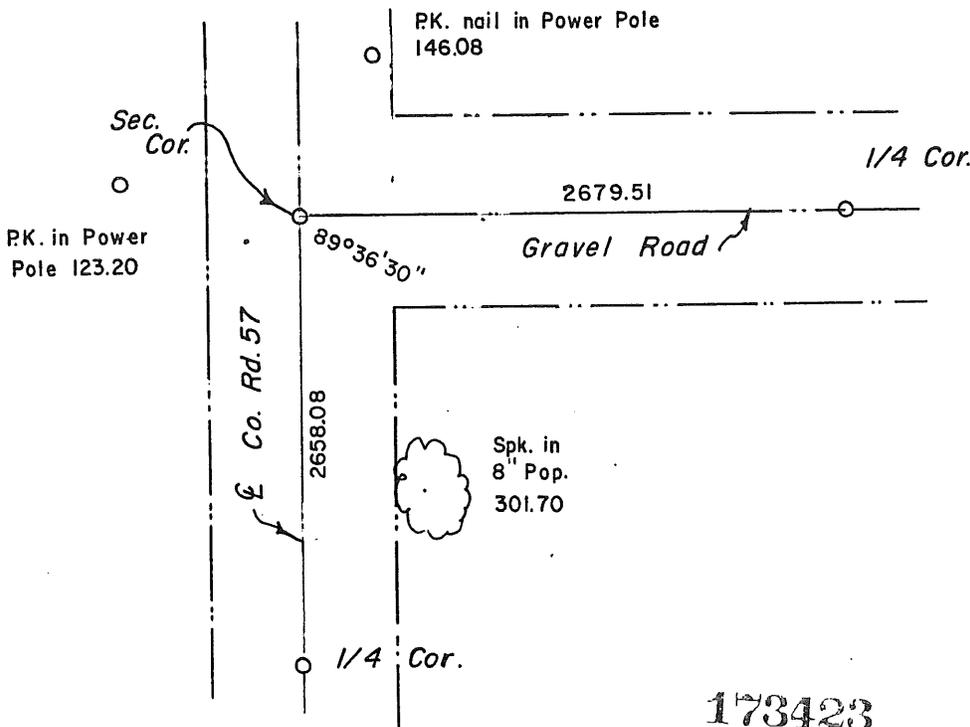

Handwritten notes:
1282
2
NENE
11
12
9631

173423

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William P. Linn

Minn. Registration No. 9394

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 16th day of May, 1985 at 11:00 am

Alex. C. Engelmeier
County Recorder

By _____ Deputy.