

Certified, Filed and or Recorded on
Mar. 10, 2009 AT 01:05PM

Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH EAST

Corner of Section 12, Township 36, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-24-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)
 On _____ placed an _____

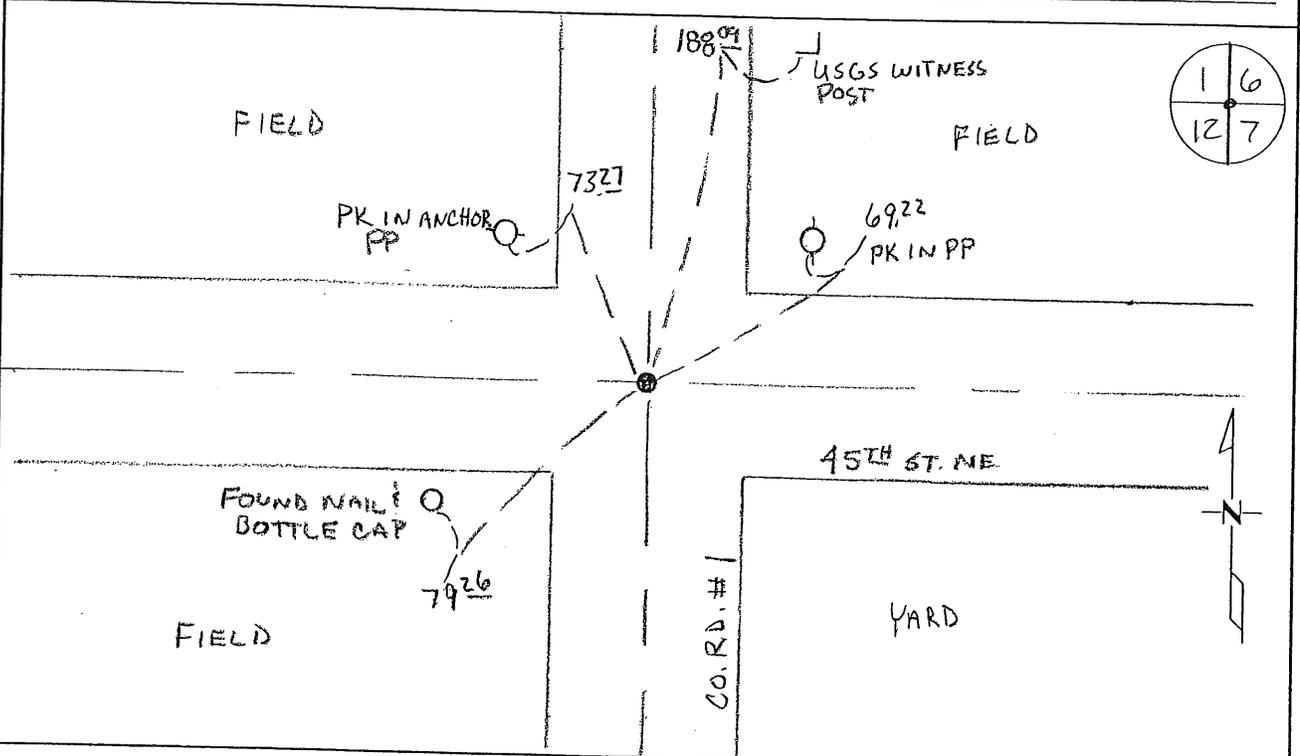

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature *Ch. Hyslop*
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Benton County Surveyor's Office
Chris Hoglund, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:**M122**


Northeast Quarter Corner of Section 12, Township 36 North, Range 31 West, Sauk Rapids Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey established this corner and set a wood post in a mound at this location with a pit 7 links north.
- 1913 County Surveyor's Record Book, pages 24 and 25, contains a survey in Section 12 by J. A. Stanton. Survey shows placed a granite monument, 8" diameter marked + on top, a ½ foot below surface in center of public roads.
- 1917 County Records contain a survey subdividing Section 6, 36-30 by R.H. West, which notes a stone at this corner.
- 1923 County Engineer's Notebook No. 32 contains a survey for SR No. 1 running south to north. Notes show corner as a set hub with notation that corner is suppose to be a stone, but couldn't find. Ties
 TP SW 66.3' TP SE 47.7'
- 1933 County Engineer's Notebook No. 71 contains survey of County road from the east terminating at this corner marked by a spike with ties:
 TP SE 39.9' TP SW 40.0'
- 1938 County Engineers' Notebook No. 116 shows survey of SAR 1 running from south to north. Notes show corner being a set spike in center of road intersection. Ties:
 Culv Post SW 25.65' Culv Post NW 26.0'
- 1977 County Surveyor's Record Book 1, page 261, shows the following reference ties.
 TP SW 66.3 TP SE 47.7
 PP NW 70.65 T Ped Post SW 79.30
 The distance to the East 1/4 corner of Section 12 is 2658.79 feet.
- 1984 William Lunser, LS 9394, found a 1/2" iron pipe at the centerlines of roads north/south and east/west. He set a cast iron monument and filed a Certificate of Location (#173427).
- 1990 Paul Wellen, LS 10461, notes in his Book 70, page 33, a cast iron monument at the corner. Measured 2652.57 feet north to the East ¼ corner of Section 1.
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:
 N- 126568.676
 E- 478598.844
- 2002 County Coordinates obtained by Sidetie (Cast Iron Monument)
 NAD 83 (1996 Adjustment)
 N-126568.812
 E-478598.247
 Note: The distances measured north and east to the ¼ corners checked well with the undated notes that called for a stone at the corner. From highway construction plans, believe stone was destroyed and the iron pipe set at the location. Certificate by Lunser agrees with 1977 ties.
- 2008 Westwood Professional Services, Inc. found a cast iron monument in the centerlines of roads north/south/east/west. CIM fits 1977 tie to T Ped Post SW and distance to E1/4 of Section 12. Measured 2694.29 feet to the N1/4 of Section 12 which agrees with Lunser certificate and measured 2652.49 feet to the E1/4 of Section 1 which agrees with Wellen distance. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2002 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21st day of May, 1984
 I did find _____ the northeast corner of Section 12,
 Twp. 36, Rg. 31, Benton County, Minnesota, which
 was evidenced by a 1/2" iron pipe found at the centerlines
of road North to South and East to West.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of cast iron monument and that
 I did establish witness or reference monuments as shown below:

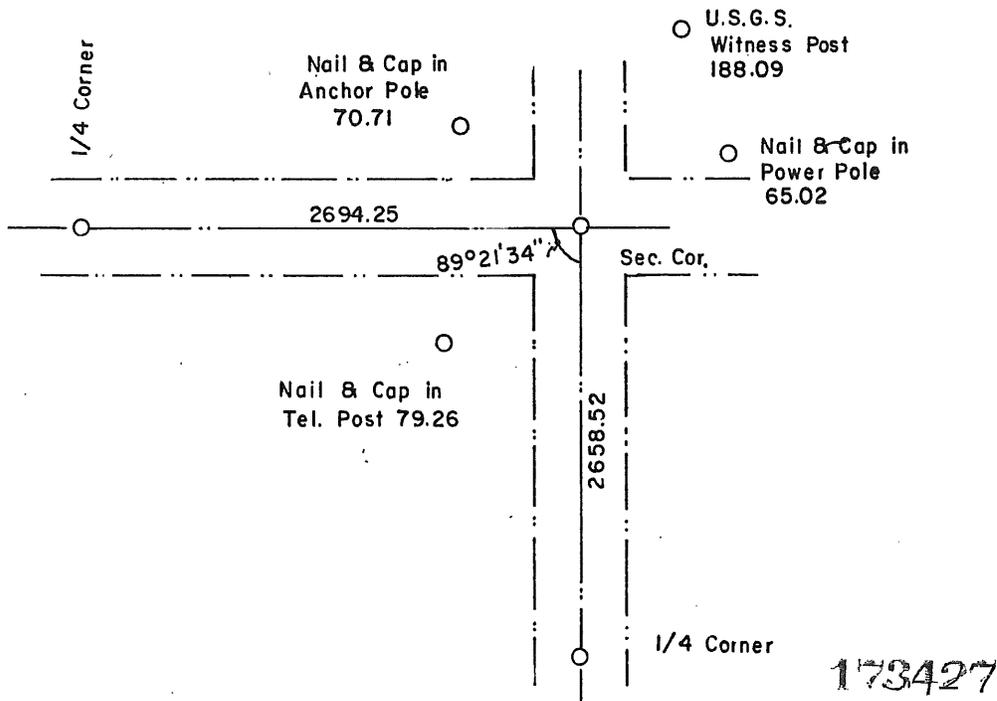

Pipe placed by _____ in Benton County during _____ construction
 NE 12
 NE 12
 13
 36-31
 NW NW
 NW NW
 2-37-30

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

Walter J. Linn

Minn. Registration No. 9394

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 16th day of May, 1985 at 11:00 a.m.

Alice C. Engelmeyer
 County Recorder

By _____ Deputy.