

MARILYN J. NOVAK
COUNTY RECORDER
BY Marilyn J. Novak DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

295386


2003 FEB 12 P 2:51

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 1, Township 36, Range 29
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found lowered monument removed monument (explain)
- On 1/14/03 placed a 1/2" iron capped #12684
DATE

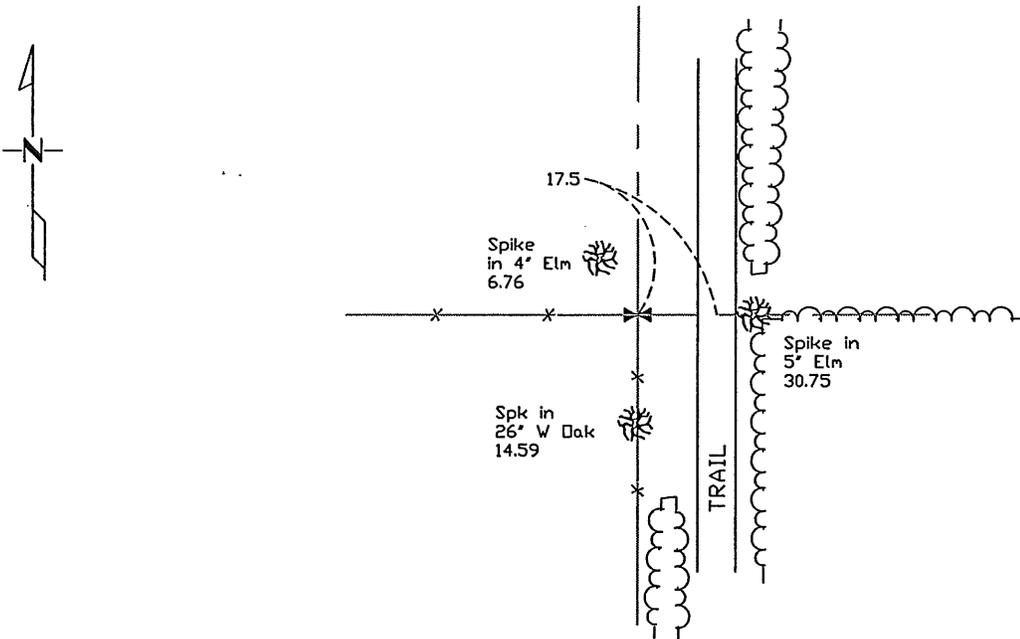

New ties are to the head of a nail with a disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 2/10/03 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

K013

The East Quarter Corner of Section 1, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Corner established by GLO and marked by a wood post with bearing trees noted as.

10" Bur Oak	N 38 E	143 links
12" Bur Oak	S 11 W	8 links

A line tree was noted as a 14" Elm North 17.54 chains

2002 Westwood Professional Services, Inc. searched for corner evidence at intersection of fence lines, north, south, and west. No evidence of a corner marker or of original bearing trees or line tree was found. We measured 2668.54 feet from the SE corner of Sec. 1 to the fence corner and 2430.56 feet from the NE corner of Sec. 1 to the fence corner. The fence corner was found to be 59.6 feet north and 3.8 feet east of the lost position. Accepted the fence corner as the best evidence of the obliterated corner position and set an iron capped #12684.

County Coordinates
NAD 83 (1996 Adjustment)
N-130024.131
E-542462.206