

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:48PM


Signed: BW
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 2, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/14/08 found a CAST IRON MONUMENT FLUSH TO GROUND
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

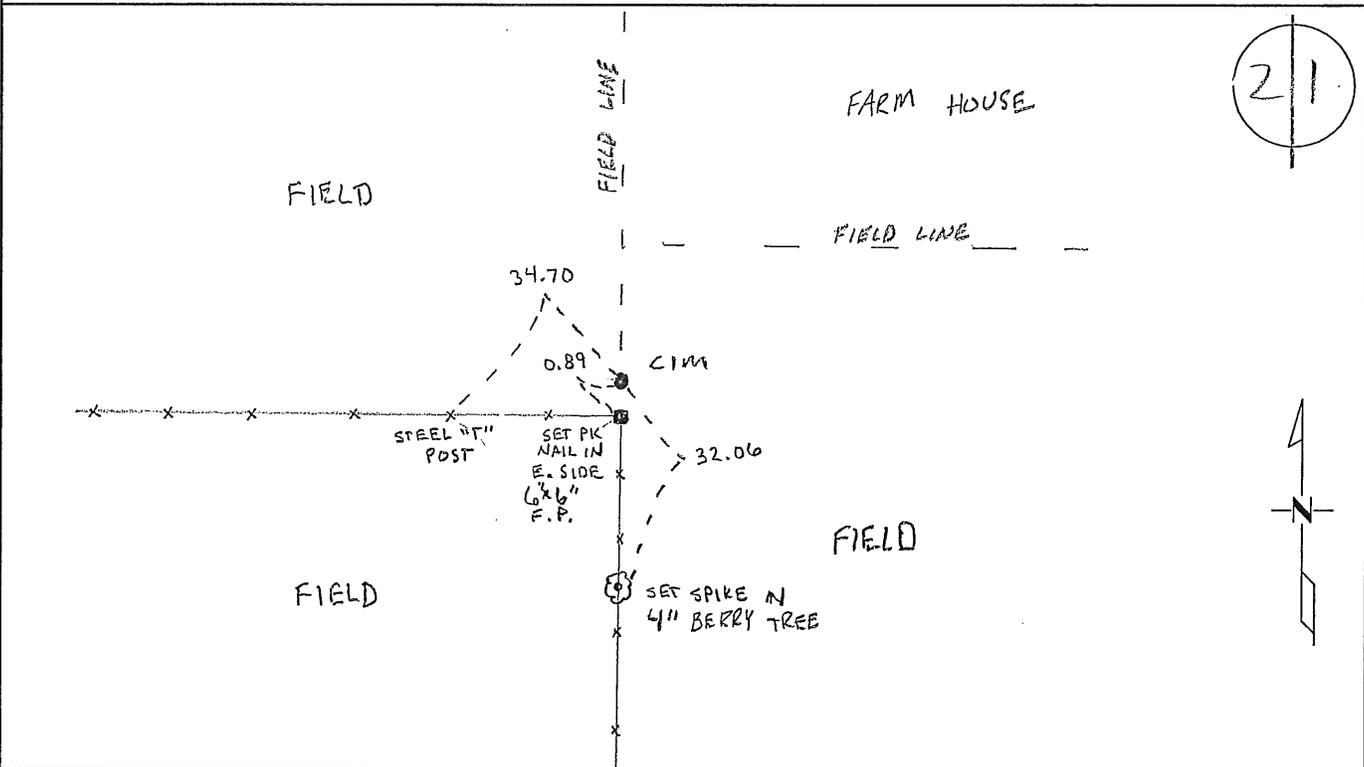

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. O'By
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**K023**

The East Quarter Corner of Section 2, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees marked:

5" W Oak	S 32 E	19 links
11" Aspen	N 68 W	15 links

1986 William Lunser, LS 9394, set a cast iron monument at a fence corner west and south. This location was supported by measurement to the north. He filed a Certificate of Location (#191239). He notes a distance of 2356.37 feet to the NE corner Sec 2 and a distance of 5269.05 feet to the West ¼ corner Sec 2.

2002 No resurvey information was found on this corner in the Benton County records.

2003 Westwood Professional Services, Inc. found CIM. Measured 2356.25 feet to the CIM at the NE corner of Section 2.

2008 The County Surveyor's Office searched and found a cast iron monument approximately 0.9 foot north of the corner of a south and west fence line. Position agrees with distances to the NE ¼ Cor. and W ¼ Cor. by Lunser in 1986. Surveyor accepts CIM position and set new ties.

County Coordinates Obtained by GPS to CIM:

NAD 83 (1996 Adjustment)

N- 130041.849

E- 537200.068

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 2, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4-28-1986 placed a Benton County C.I.M.
DATE

SKETCH OF REFERENCE TIES

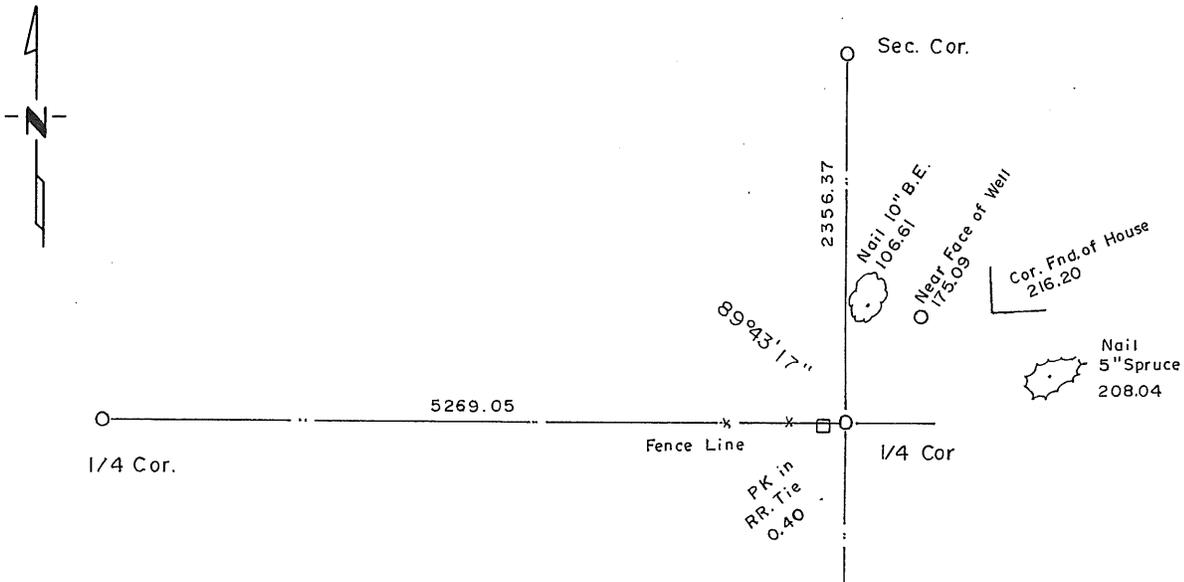

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Linder 12/15/88
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

4-28-86:

Set 1/4 Section Corner at fence corner west-south. Location was supported by measurement to north.

191239

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 56 AM '89

ALICE G. ENGELMEYER
COUNTY RECORDER

BY Jed DEPUTY