

279108

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

Oct 22 2 46 PM '01

MARILYN J. NOVAK
COUNTY RECORDER
BY Marilyn J. Novak DEPUTY x.m

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 36 N, Range 29 W
4th Principal Meridian, State of Minnesota, County of BENTON


At the corner location shown on the sketch:

On 4/18/2001 found a STANDARD HWY. DEPT. CAST IRON MONUMENT, UP .5' AND A
DATE 1 1/2" IRON ROD WITH ROUNDED HEAD AND WOOD STAKE 7.5' SO. OF CIM

left monument as found lowered monument removed monument (explain)

On 5/28/2001 placed a REMOVED THE CIM AND REPLACED IT WITH A 1/2" IRON PIPE
DATE ALSO LOWERED THE 1 1/2" IRON ROD AND SET THE CIM ABOVE IT.

Note: Bearings to ties are approximate.

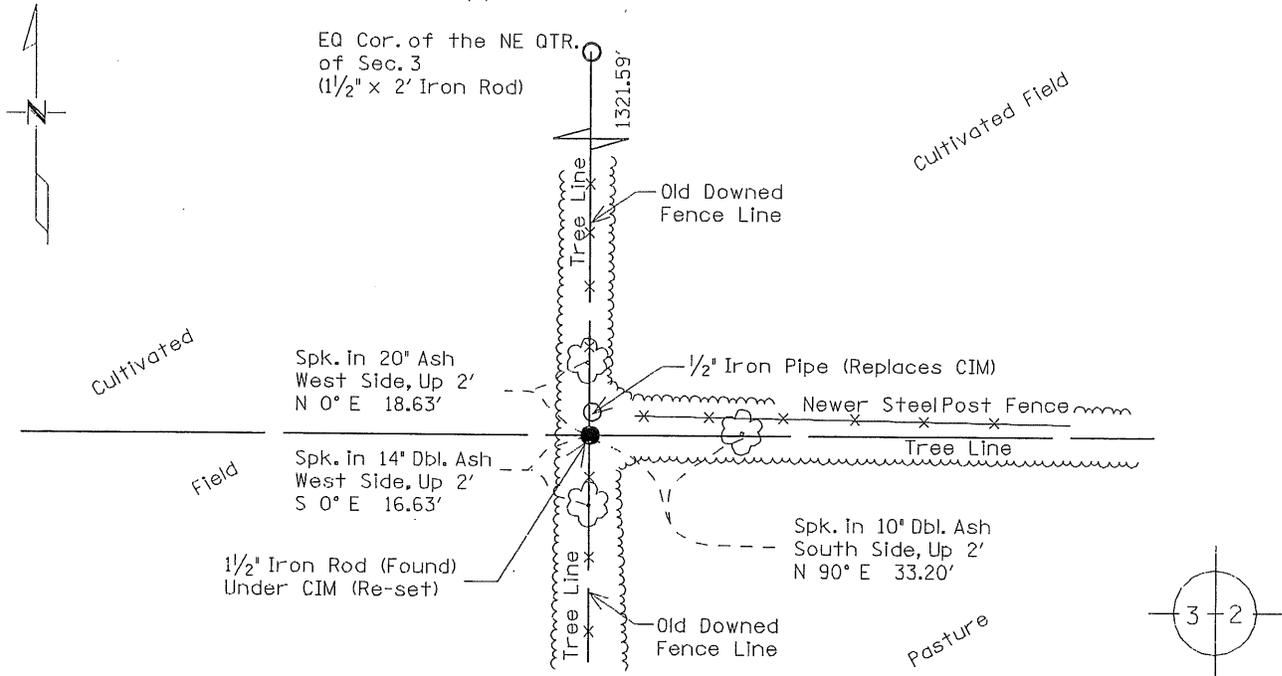

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Samuel J. DeLeo Date 6-4-2001 License No. 40341

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence

East Quarter Corner of Section 3, Twp. 36 N, Rng. 29 W
4th P.M., Benton County, Minnesota

Copies of notes from the original GLO survey, located in the office of the Benton County Highway Department, state that a wood post was set to mark the corner. Physical remains to evidence of this corner could not be found.

April, 1929; H. G. Elletson, County Surveyor, noted an iron monument marking the corner that measured 2581.3' South of the Northeast Corner of said Section 3 and 1320.0' South of the Northeast corner of the Northeast Quarter of the Northeast Quarter of said Section 3. The corner is referenced to the intersection of four fences.

April, 1986; William Lunser, (RLS # 9394) placed a Highway Department cast iron monument as shown on the Certificate of Location of Government Corner on file in the Benton County Highway Department. Mr. Lunser's notes that he searched the area and found no evidence of any previous monument. He then placed a CIM at the intersecting fence lines to the north, south, and east.

April 2001; Sam DeLeo, RLS #40341, found a Highway Department cast iron monument in accordance with Mr. Lunser's certificate. Also found was a 1 1/2" dia. iron rod with a rounded head and an old pointed wood post approximately 7.5' South of Mr. Lunser's CIM. Also found was a newer steel post fence line to the east and a old downed fence line that is grown through trees to the north and south. The found rounded iron rod measures 2583.72' South of the Northeast Corner of said Section 3 and 1321.59' South of the Northeast corner of the Northeast Quarter of the Northeast Quarter of said Section 3. These distances are reasonably close to H. G. Elletson's 1929 distances. The location of the found rounded iron rod is accepted as the correct location for the corner. With the approval of Mr. Paul Wellen, Acting Benton County Surveyor, the found iron rod was lowered, Mr. Lunser's CIM was removed and placed above the iron rod. A 1/2" iron pipe was set in place of the CIM for reference purposes. New reference ties were recorded and a new Certificate of Location of Government Corner was made.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 3, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 4-28-86 placed a Benton County C.I.M.
DATE

SKETCH OF REFERENCE TIES

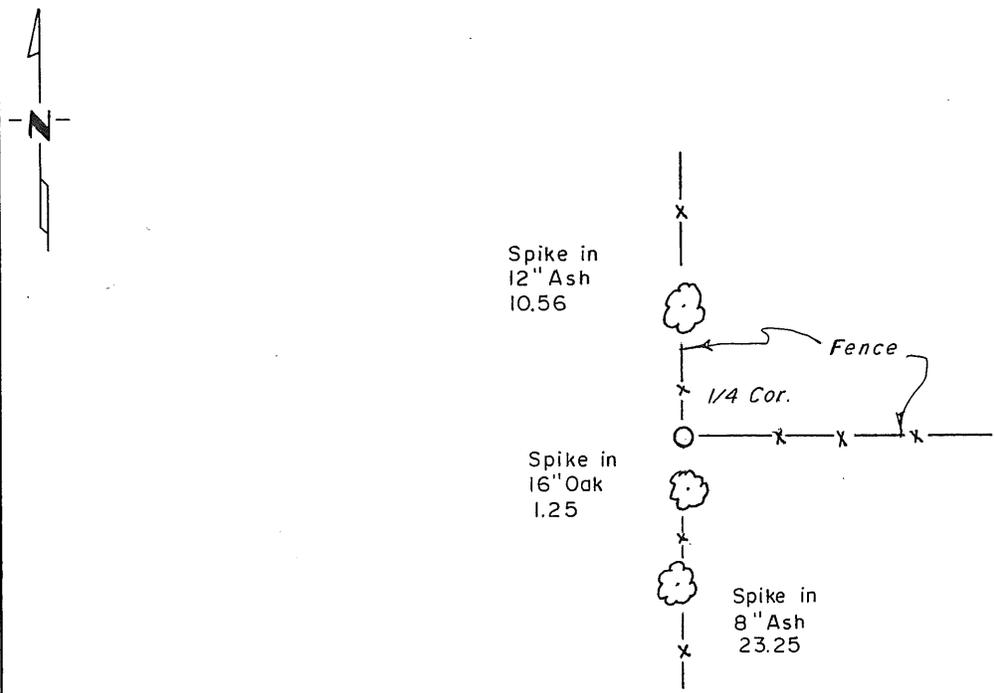

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Jansen 12/15/88
SIGNATURE DATE

Registration No. 9394

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

4-28-86 In searching the area no evidence was found of any previous monument. Placed a C.I.M. at the intersection of a fence line (north-south) and a fence line to the east.

191240

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 56 AM '89

ALICE G. ENGELMEYER
COUNTY RECORDER

BY Jew DEPUTY