

A 368984

Certified, Filed and or Recorded on
Sep. 22, 2009 AT 12:20PM


Signed: BW
MARILYN J NOVAK G V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER
Fee Amount: \$46.00

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 7, Township 36, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09-09-09 found a Cast Iron Monument down 0.7' and
2.3' West of the centerline of 85th Ave. NE.
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____

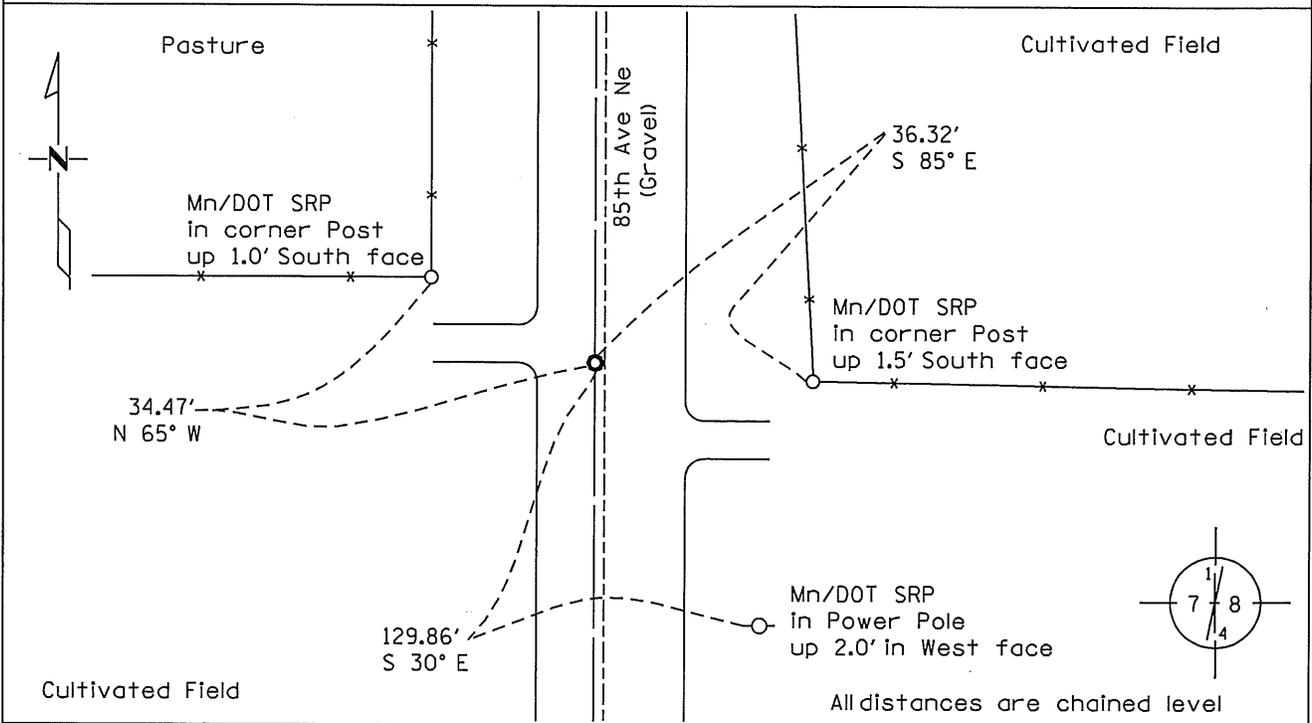

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Kevin J. Metz Date 9-10-2009 License No. 40343
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer
MNDOT

Statement of Evidence:**East Quarter Corner of Section 7, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.**

1855 Oscar F. Davis ran the original public survey and set a wood post at this location and bearing trees were recorded.

5" Poplar	S 72 E	38 links
5" Poplar	S 60 1/2 W	8 links

2002 No record evidence was found on this corner in the Benton County records.

2004 The Minnesota Department of Transportation searched the corner area in center of north-south road and fence line east and found no evidence of the corner. Westwood Professional Services, Inc. set a spike for temporary corner and measured 2624.92 feet to the Southeast Corner of Section 7 and 2617.69 feet to the Northeast Corner of Section 7. Tied into occupation at the 1/16th corners north and south, but did not provide useful information. Temporary corner is 33 feet east of a straight line between section corners. Believe temporary position is the best evidence of the obliterated corner at this time. MN/DOT plans to excavate corner area to search for monument.

County Coordinates obtained by GPS (for reference only):

NAD 83 (1996 Adjustment)

N- 124351.596

E- 516423.862

2005 On June 14th, 2005, The Minnesota Department of Transportation in conjunction with the Benton County Surveyor, excavated a search area with County Highway Department backhoe. Excavated approximately 12 foot by 8 foot area and a 15" x 11" x 8" fieldstone with a pointed top was found down 1.5 feet, just below old roadbed. Also found pieces of barbed wire near the stone. The stone was left in place and a Mn/Dot cast iron monument was set with the top down 0.7 feet and 2.3 feet west of the centerline of road. Reference ties were established.

County Coordinates Obtained by GPS (for reference only)

NAD 83 (1996 Adjustment)

N- 124354.72

E- 516421.31

2009 On September 9th, 2009, The Minnesota Department of Transportation found a Mn/DOT cast iron monument. Reference Ties were verified as shown on the front of this document. The Minnesota Department of Transportation accepts the cast iron monument as the correct location of the East Quarter Corner of Section 7.

For details and survey analysis, contact the Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.