

Certified, Filed and or Recorded on  
Dec. 16, 2008 AT 01:45PM


Signed: BW  
MARILYN J NOVAK G-V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 15, Township 36N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/13/08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

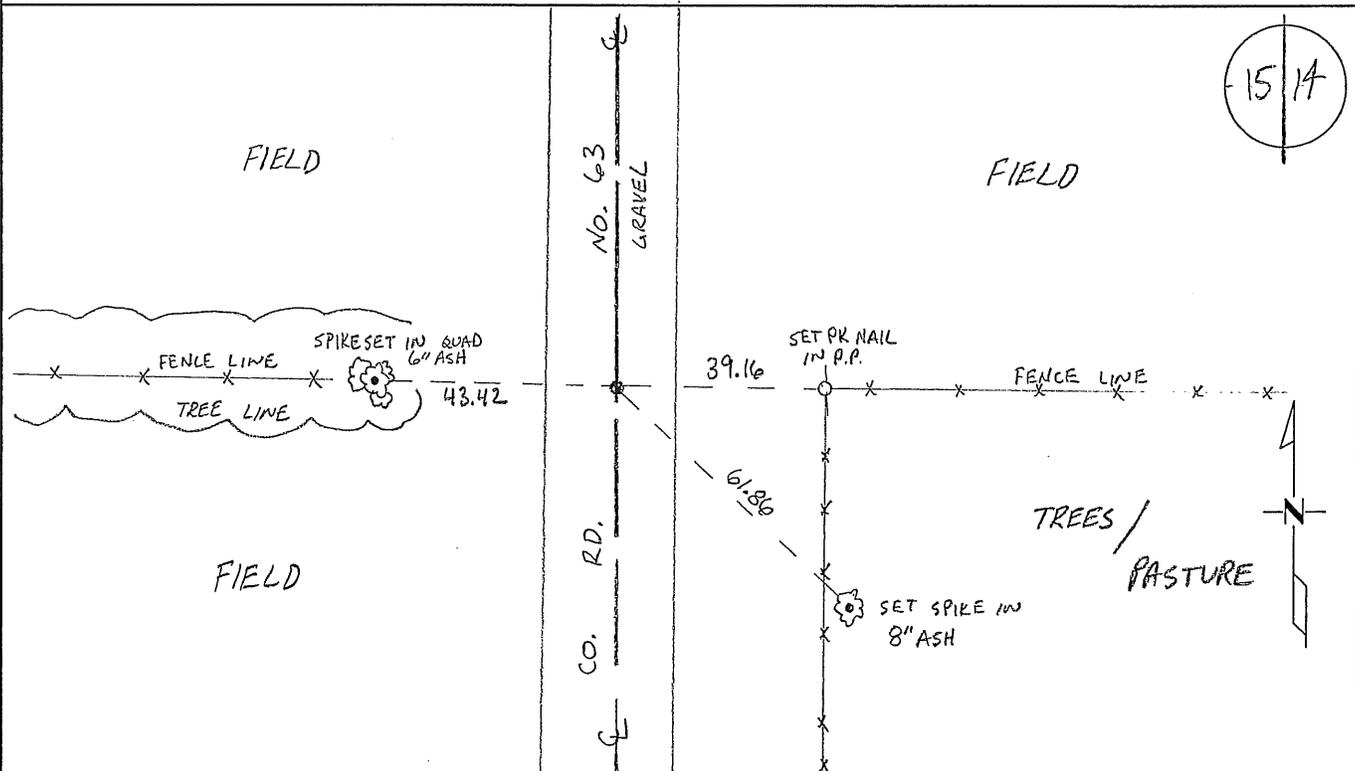

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

**K153**

The East Quarter Corner of Section 15, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

6" Blk Ash	S 79 3/4 E	13 links
12" Maple	S 54 W	16 links

1907 County Road Book, pages 2 and 3, contains a road survey by Felix Parent, County Surveyor, where road ran north-south on section line. Notes show "drove gas pipe in place of old post". Stationing gives distances of 2451 feet to the SE corner and 2653 feet to the NE corner of Section 15.

1912 County Engineer's Notebook 2, page 37, contains a road survey by Cleveland for road running north and south. Notes show corner with stationing distances of 2641 feet to the SE corner and 2656 feet to the NE corner of Section 15.

1931 County Engineer's Notebook No. 146 contains a survey by H. G. Elletson where he ran the east-west quarter line of Section 14. Notes state: "found W 1/4 cor. by witnesses as to location and fences"

1987 William Lunser, LS 9394, set a cast iron monument at the intersection of roads north/south, fence line west and field line east. This location is supported by the 1/16 line to the east of a point 1329.5 feet North of the 1/4 corner. He filed a Certificate of Location (#191241). He notes a distance of 2658.52 feet to the NE Cor Sec 15.

2001 Westwood Professional Services, Inc. found a cast iron monument at the centerline of County Road 63 (running south).

2002 Measured 2641.08 feet to the SE corner and 2658.49 feet to the NE corner of Section 15.

Note: Accepted CIM as marking the obliterated position supported by old road surveys. Appears 1907 survey had a 200-foot bust in measuring to the SE corner.

2008 The County Surveyor's Office searched and found a cast iron monument under the centerline of the north-south gravel road (County Road No. 63) and on line with east and west fence lines. Position agrees with measured distances noted in 1912. The Surveyor accepts the cast iron monument and ties were updated.

County Coordinates Obtained by GPS to CIM.  
 NAD 83 (1996 Adjustment)  
 N-119279.900  
 E-532173.890


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 15, Township 36, Range 29, 4<sup>th</sup> P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 7-13-1987 placed a Benton County C.I.M.  
DATE

## SKETCH OF REFERENCE TIES

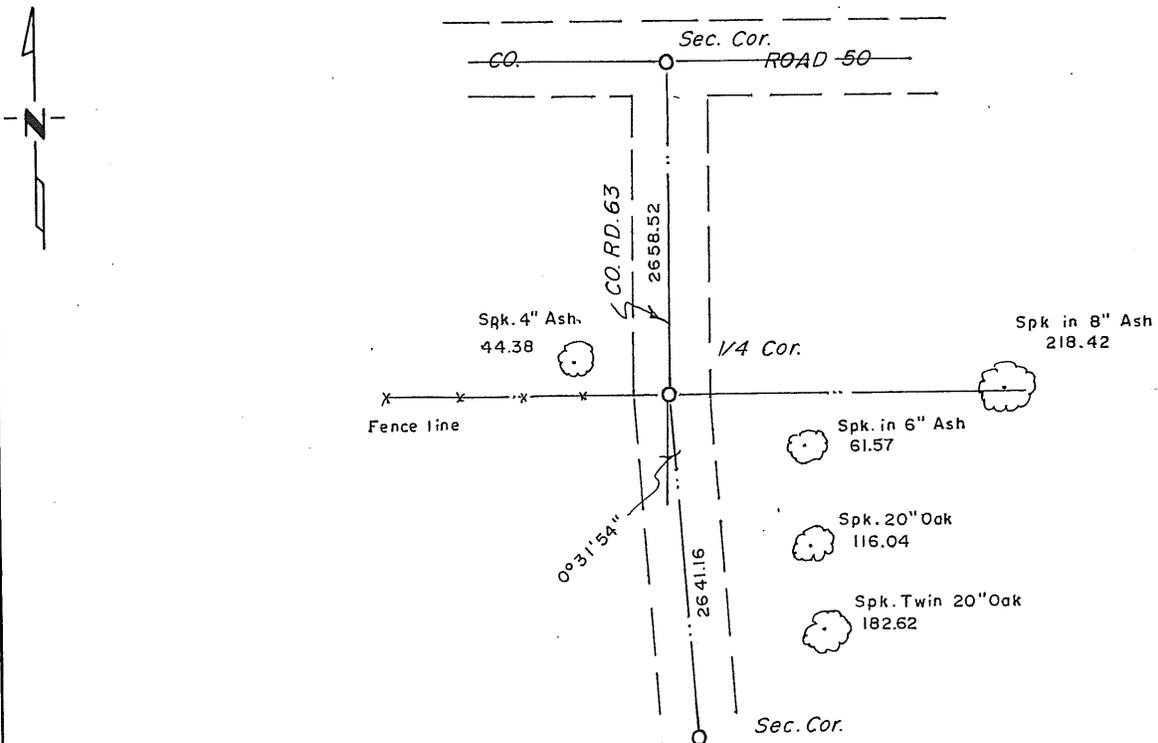

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William A. Johnson 12/15/88  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_  
By \_\_\_\_\_, Deputy  
DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 15, TWP 36, RG 29;

7-13-1987

Placed C.I.M. at centerline of road running north and south and fence line to the west and field line to the east. This location is supported by a 1/16 line fence to the east of a point 1329.5 feet North of the 1/4 Corner

191241

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 11 59 AM '89

ALICE C. ENGELMEYER  
COUNTY RECORDER

BY Jew DEPUTY