

MARILYN J. NOVAK
COUNTY RECORDER
BY Marilyn Novak DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

295391


2003 FEB 12 P 2:51

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 19, Township 36, Range 29
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 11/13/01 found a 1/2" open iron near the fence corner
DATE
- left monument as found lowered monument removed monument (explain)
- On 12/20/01 placed a cast iron monument at the location of the found iron
DATE

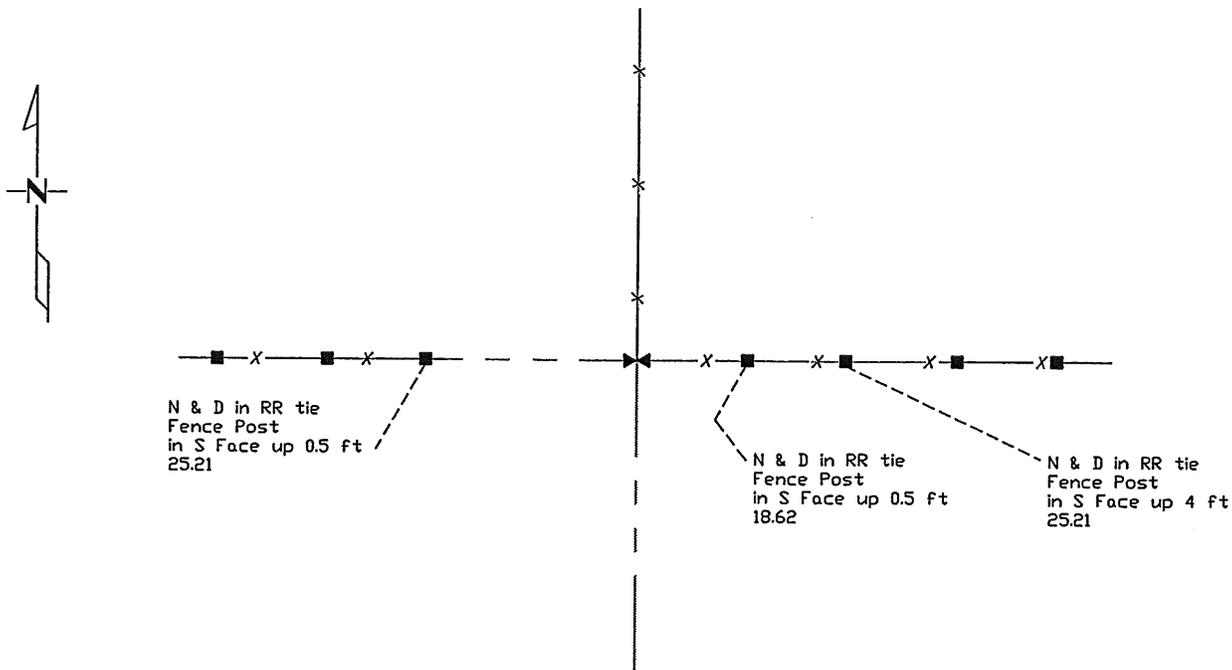

New ties are to the head of a nail with a disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 2/10/03 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

K193

The East Quarter Corner of Section 19, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 GLO note a wood post was set and bearing trees were recorded

7" B. Oak S 24 W 16 links

6" B. Oak N 17 W 56 links

1993 David Regan found a 1/4" iron monument at the intersection of fence lines running south and east-west. A Certificate of Location (#231255) was recorded.

2001 Westwood Professional Services, Inc. found a 1/2" iron monument at the intersection of fence lines running south and east-west. We removed the iron monument and placed a cast iron monument at the location and established reference ties.

Coordinates Obtained by GPS (1/2" I.M.)

NAD 83 (1996 Adjustment)

N-113658.068

E-516437.740

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER _____ Corner of Section 19, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 7/29/93 found a 1/4" Iron monument at the corner of fence lines
DATE
 East-West and North
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

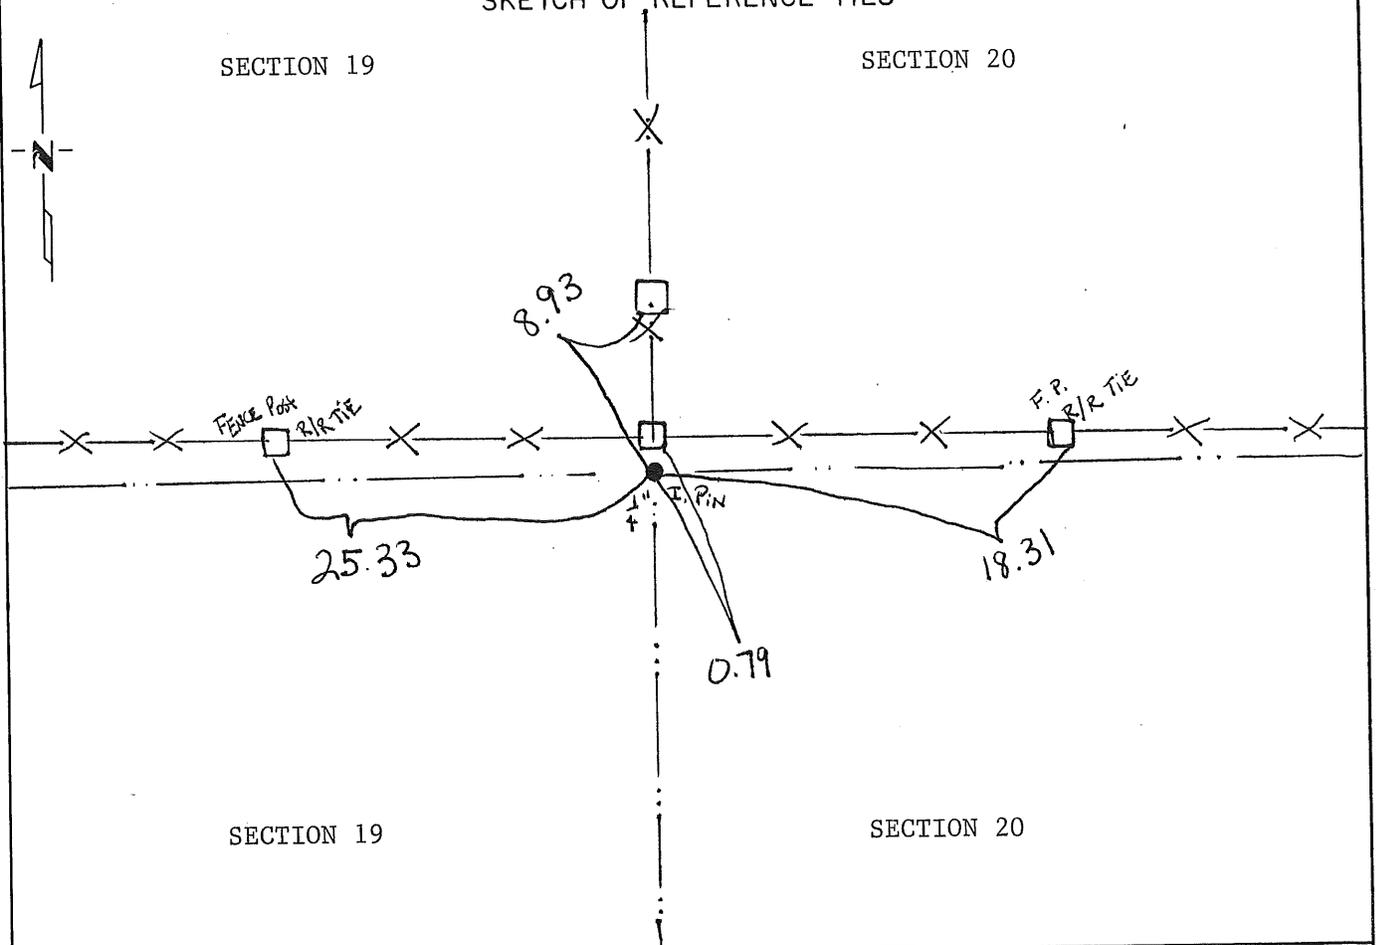

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David C. Regan 3/27/95
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ M. on the _____ day of _____ A.D., 19 ____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1855 by Oscar Davis.

The County Surveyors records were searched with no reference to this corner.

On 7/93, Regan Land Surveyors, Inc. searched and dug the area and found a $\frac{1}{4}$ " iron pin at this corner and made ties.

231255

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

OCT 20 3 03 PM '95

ALICE G. ENGLISH
COUNTY RECORDER

BY MM DEPUTY xm