

286407

Office of the County Recorder, BENTON County, Minnesota
I hereby certify that the within instrument was filed for record in this office on the
3rd day of June, 2002. 12:08 P.M.

MARILYN J. NOVAK
COUNTY RECORDER


By BW Deputy.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 23, Township 36, Range 29
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 5/13/2002 found a cast iron monument
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

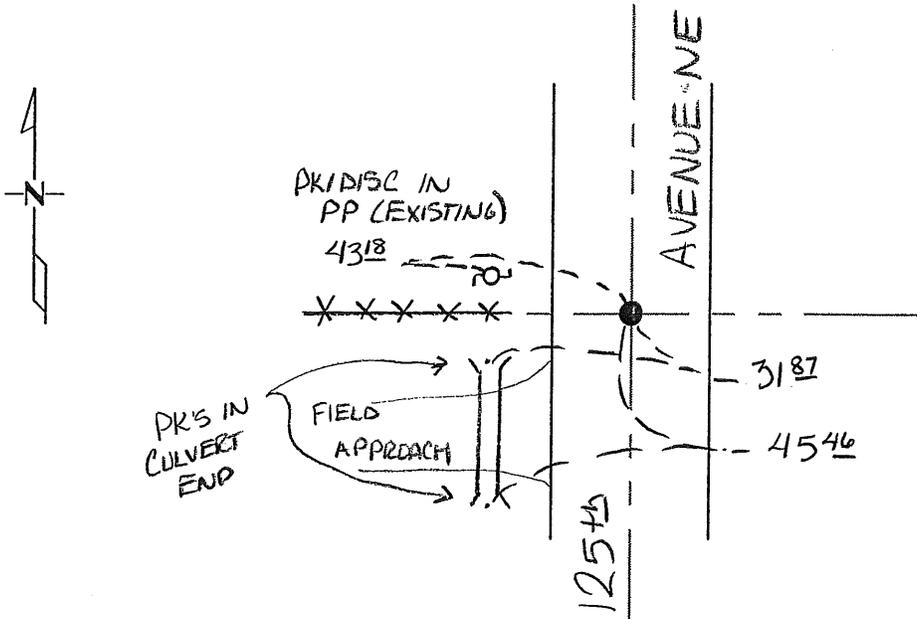

Ref. Job #20025051

Ties that are found and in good condition are noted as 'existing'. New tree and power pole ties are to the head of a nail with a brass disk marked 'Corner Tie'.

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 6/3/02 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

K233

The East Quarter Corner of Section 23, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

In 1855, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

12" Bur Oak	S 67 W	173 links
8" Elm	S 59 E	335 links

On April 30, 2002 Westwood Professional Services, Inc. found a cast iron monument at the intersection of 125th Avenue NE (running north and south) and a fence line (from the west).

On May 13, 2002 Westwood Professional Services, Inc. dug with a backhoe down to the natural ground around the cast iron monument. We found many large fieldstones but no monument. We have no evidence of who set the cast iron monument, but accepted it as marking the obliterated corner position using the road and fence line as evidence. We left the cast iron monument as found.

Reference Job #20025051

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-114052.78
E-537487.89