

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 1, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 9-01-92 found a 1/2" Iron
DATE

left monument as found, lowered monument, removed monument (explain)

On 9-01-92 placed a Cast Iron Monument (Flush)
DATE

SKETCH OF REFERENCE TIES

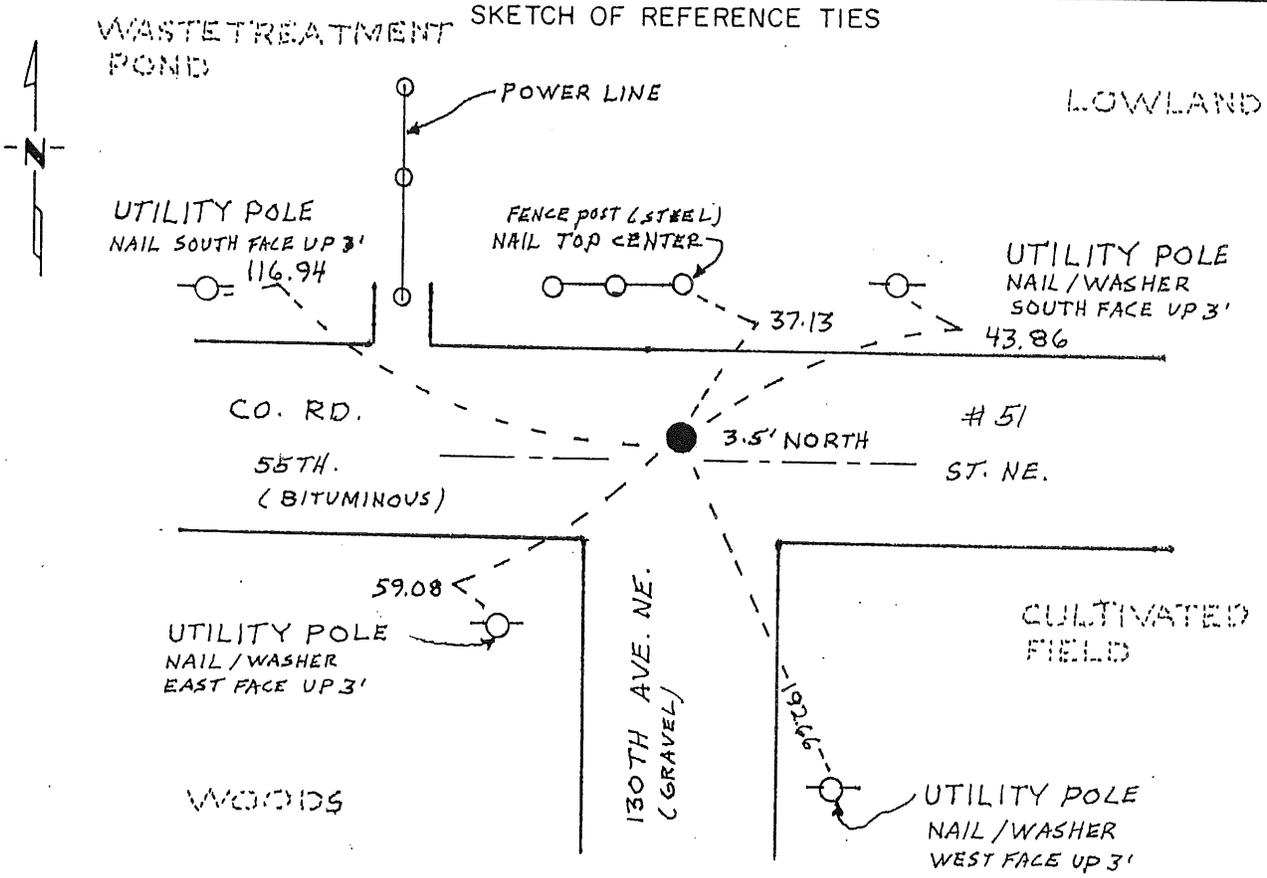

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 2-16-93
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 1, T 36N, R 29W, 4TH P.M.

1. During the G.L.O. survey of 1849, Mr. Theodore Conkey, a U.S. Deputy Surveyor; set a wood post to mark said corner.
2. Benton County's old surveyor's books provided no information to locate said corner.
3. On September 1, 1992, Paul E. Wellen & Associates searched for said corner at center line-center line of 55th Street NE and 130th Avenue NE. Found 1/2" open pipe. We accepted Iron pipe location as evidence of the location of said corner. On September 1, 1992, we set a Cast Iron Monument, and removed 1/2" Iron Monument. Also established new reference ties as indicated.

216308

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUL 14 1 24 PM '93

ALICE C. ENGELMEYER
COUNTY RECORDER

BY JW DEPUTY